


2SK1413

Ultrahigh-Speed Switching Applications

Features

- · Low ON resistance, low input capacitance, Ultrahigh-speed switching.
- High reliability (Adoption of HVP process).
- · Micaless package facilitating mounting.

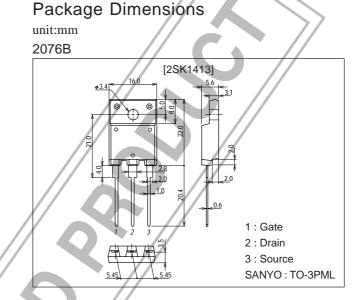

Specifications

Absolute Maximum Ratings at $Ta = 25^{\circ}C$

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	VDSS		1500	V
Gate-to-Source Voltage	VGSS		±20	V
Drain Current (DC)	JD		2	А
Drain Current (Pulse)	I _{DP} PW≤10	0µs, duty cycle≤1%	4	А
Allowable Power Dissipation	PD To OF		3.0	W
	TC=25	°C	60	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Electrical Characteristics at $Ta = 25^{\circ}C$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Onit
Drain-to-Source Breakdown Voltage	V(BR)DSS	ID=1mA, V _{GS} =0	1500			V
Zero-Gate Voltage Drain Current	IDSS	V _{DS} =1200V, V _{GS} =0			100	μA
Gate-to-Source Leakage Current	IGSS	V _{GS} =±20V, V _{DS} =0			±100	nA
Cutoff Voltage	VGS(off)	V _{DS} =10V, I _D =1mA	1.5		3.5	V
Forward Transfer Admittance	yfs	V _{DS} =20V, I _D =1A	1.0	1.5		S
Static Drain-to-Source ON-State Resistance	R _{DS(on)}	I _D =1A, V _{GS} =10V		8.0	11.0	Ω

(Note) Be careful in handling the 2SK1413 because it has no protection diode between gate and source.


Continued on next page.


- Any an all SAN/*C* products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYC products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges,or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
		Conditions		typ	max	
Input Capacitance	Ciss	V _{DS} =20V, f=1MHz		550		pF
Output Capacitance	Coss	V _{DS} =20V, f=1MHz		90		pF
Reverse Transfer Capacitance	Crss	V _{DS} =20V, f=1MHz		30		pF
Turn-ON Delay Time	t _{d(on)}	See specified Test Circuit	$/ \wedge$	14		ns
Rise Time	tr	See specified Test Circuit		16		ns
Turn-OFF Delay Time	td(off)	See specified Test Circuit		160		ns
Fall Time	t _f	See specified Test Circuit		40		ns
Diode Forward Voltage	V _{SD}	I _S =2A, V _{GS} =0		1.0	1.5	V

Switching Time Test Circuit

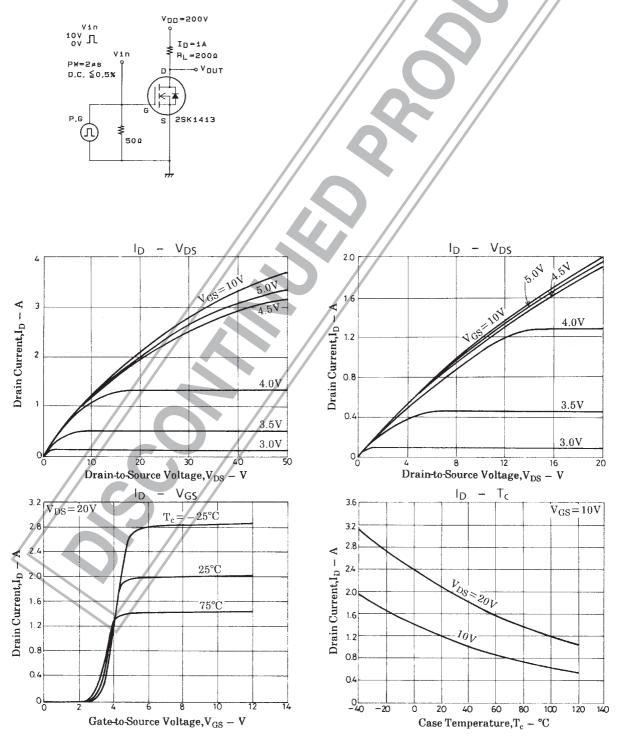

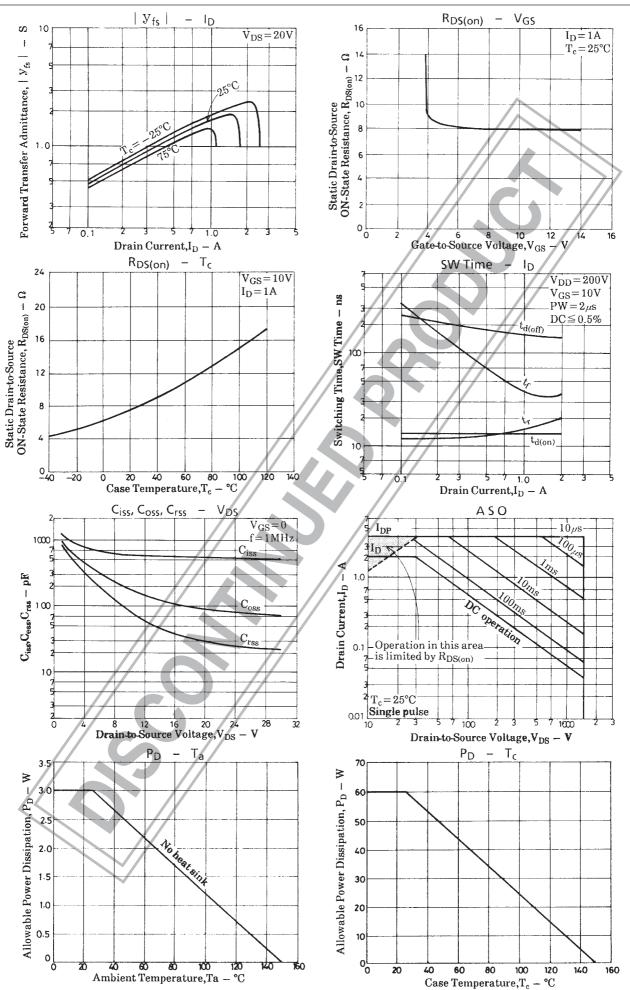

- Specifications of any and all SA 'Ye roat ts described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should alware evaluate the and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., 1+d s., res to supriv nigh-quality high-reliability products. However, any and all semiconductor products is " with some probability. It is possible that these probabilistic failures could give rise to accidene or even its that could endanger human lives, that could give rise to smoke or fire, or that could carries a control to other property. When designing equipment, adopt safety measures so that these kind of accidents or events cannot occur. Such measures include but are not limited to protective circuits and erry prove ion circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or containe bein are controlled under any of applicable local export control laws and regulations, such products such and be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- N part of his publication may be reproduced or transmitted in any form or by any means, electronic or meeting, including photocopying and recording, or any information storage or retrieval system, or other use, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1999. Specifications and information herein are subject to change without notice.