


EVAL-L9945 evaluation board

Data brief

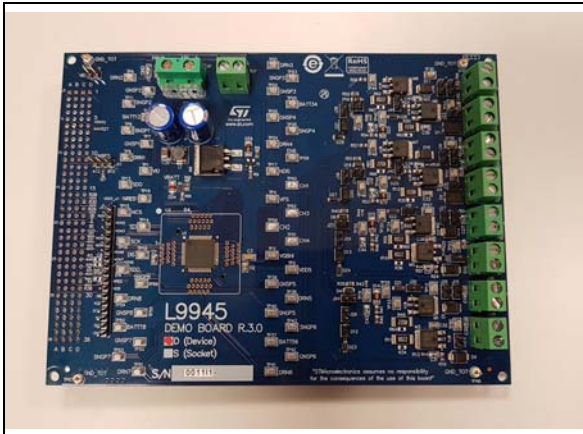

Features

- Voltage min/max: 3.8 V to 36 V.
- 8-channel configurable MOSFET pre-driver:
 - High-side (N-channel and P-channel MOS)
 - Low-side (N-channel MOS)
 - H-bridge (up to 2 H-bridge)
 - Peak & Hold (2 loads)
- Device registers setting and the full diagnostic are available through SPI.
- Access to all relevant pins by test points.
- Input signal connector compatible with the SPC563M-DISP (SPC563M64L Discovery+ evaluation board).
- Possibility to connect a generic microcontroller board by using a simple adapter.

Description

The EVAL- L9945 is an evaluation board designed to evaluate L9945, a smart power device designed by STMicroelectronics in advanced BCD technology.

L9945 is a flexible high-side/ low-side configurable pre-driver able to drive both NMOS and PMOS. It is possible to configure the device as independent 8 high-side and low-side pre-driver or as 2 H-Bridge pre-driver or 2 pick and hold pre-driver by using SPI configuration and jumper on the board.

All channels are protected against short circuit, over current and over-temperature conditions.

The board can be connected to the SPC563M-DISP, the Discovery+ board developed for the SPC563M64L.

Table 1. Device summary

Order Code	Reference
EVAL-L9945	EVAL-L9945 evaluation board

1 System requirements, HW and SW resources

1.1 System requirements

- Power supply: 4 V ÷ 40 V; up to 30 A
- SPC56 discovery board or microcontroller board able to offer:
 - SPI signals
 - 12 GPIO in order to drive injector and ignition and to monitor status channels and enable pin
 - +5 V or 3,3 V (Vcc)

1.2 Development toolchain

- Labview and UDE VISUAL PLATFORM
- USB – RS232 cable

1.3 Demonstration software

Software is available for demonstration purpose.

For more information and download, please refer to ST web.

2 Revision history

Table 2. Document revision history

Date	Revision	Changes
10-Oct-2017	1	Initial release.
02-May-2019	2	Updated figure in cover page.
23-May-2019	3	Minor text changes.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved