

## ± 15 kV ESD protected 5 V RS-232 transceiver


### Features

- ESD protection for RS-232 i/o pins: ±15 kV human body model
- 230kbps data rate
- Guaranteed slew rate 3 V/ms (min.)
- Operates from a single 5 V power supply
- Packaged in SSO-24 and TSSOP24

### Description

The ST207E is a 5 driver and 3 receiver devices designed for RS-232 and V.28 communications in harsh environments. Each transmitter output and receiver input is protected against ±15 KV electrostatic discharge (ESD) shocks. The drivers and receivers of the ST207E meet all EIA/TIA-232E and CCITT V.28 specifications at data rates up to 120 Kbps, when loaded in accordance with the EIA/TIA-232E specification.

The ST207E operates with four 0.1 µF capacitors. It came in 24-pin SSOP and TSSOP packages.

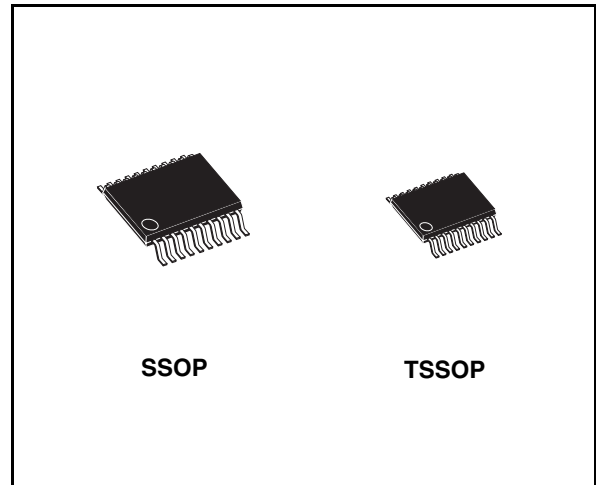

**Table 1. Device summary**

| Order codes | Temperature range | Package               | Packaging           |
|-------------|-------------------|-----------------------|---------------------|
| ST207ECPR   | 0 to 70 °C        | SSOP-24 (Tape & Reel) | 1350 parts per reel |
| ST207EBPR   | -40 to 85 °C      | SSOP-24 (Tape & Reel) | 1350 parts per reel |
| ST207ECTR   | 0 to 70 °C        | TSSOP24 (Tape & Reel) | 2500 parts per reel |
| ST207EBTR   | -40 to 85 °C      | TSSOP24 (Tape & Reel) | 2500 parts per reel |

---

# Contents

|   |                                  |    |
|---|----------------------------------|----|
| 1 | Pin configuration .....          | 3  |
| 2 | Maximum ratings .....            | 5  |
| 3 | Electrical characteristics ..... | 6  |
| 4 | Typical application .....        | 8  |
| 5 | Package mechanical data .....    | 9  |
| 6 | Revision history .....           | 14 |

# 1 Pin configuration

Figure 1. Pin connections (top view)

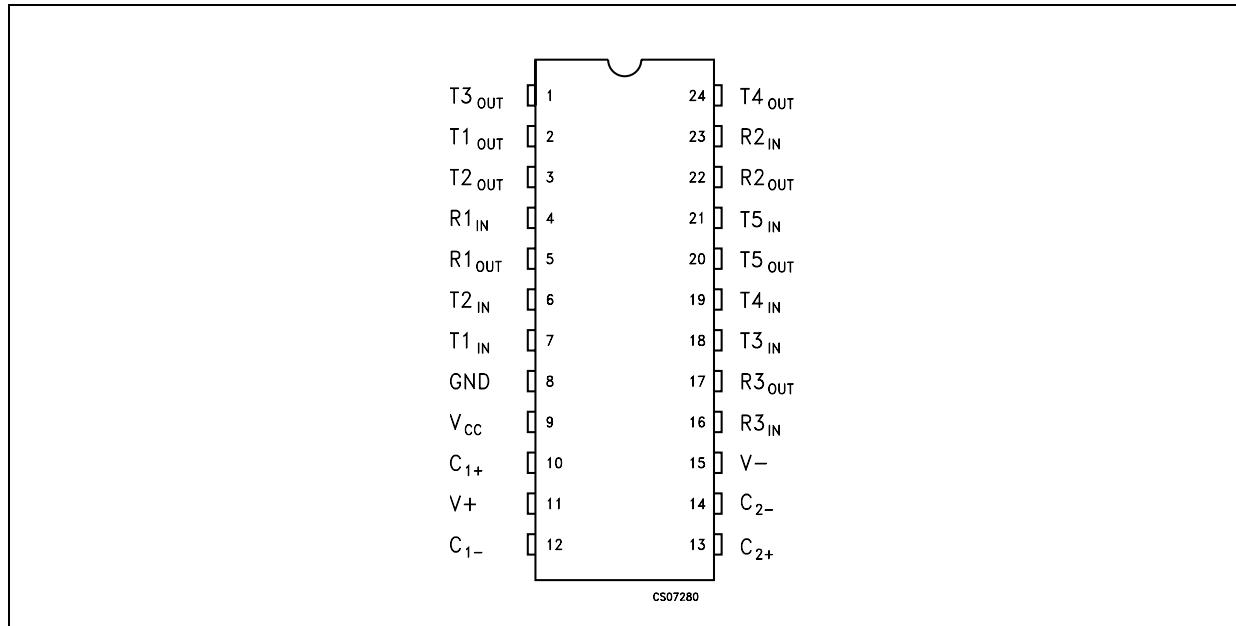


Table 2. Pin description

| Pin N° | Symbol            | Note  |
|--------|-------------------|---|
| 1      | T3 <sub>OUT</sub> | RS-232 driver output                                      |
| 2      | T1 <sub>OUT</sub> | RS-232 driver output                                      |
| 3      | T2 <sub>OUT</sub> | RS-232 driver output                                      |
| 4      | R1 <sub>IN</sub>  | RS-232 receiver input                                     |
| 5      | R1 <sub>OUT</sub> | TTL/CMOS receiver output                                  |
| 6      | T2 <sub>IN</sub>  | TTL/CMOS driver input internal pull-up to V <sub>CC</sub> |
| 7      | T1 <sub>IN</sub>  | TTL/CMOS driver input internal pull-up to V <sub>CC</sub> |
| 8      | GND               | Ground  |
| 9      | V <sub>CC</sub>   | 4.75V to 5.25V supply voltage                             |
| 10     | C <sub>1+</sub>   | Terminal for positive charge-pump capacitor               |
| 11     | V <sub>+</sub>    | 2V <sub>CC</sub> generated by the charge-pump             |
| 12     | C <sub>1-</sub>   | Terminal for negative charge-pump capacitor               |
| 13     | C <sub>2+</sub>   | Terminal for positive charge-pump capacitor               |
| 14     | C <sub>2-</sub>   | Terminal for negative charge-pump capacitor               |
| 15     | V <sub>-</sub>    | -2V <sub>CC</sub> generated by the charge-pump            |
| 16     | R3 <sub>IN</sub>  | RS-232 receiver input                                     |
| 17     | R3 <sub>OUT</sub> | TTL/CMOS receiver output                                  |

**Table 2. Pin description**

| Pin N° | Symbol            | Note  |
|--------|-------------------|---|
| 18     | T3 <sub>IN</sub>  | TTL/CMOS driver input internal pull-up to V <sub>CC</sub> |
| 19     | T4 <sub>IN</sub>  | TTL/CMOS driver input internal pull-up to V <sub>CC</sub> |
| 20     | T5 <sub>OUT</sub> | RS-232 driver output                                      |
| 21     | T5 <sub>IN</sub>  | TTL/CMOS driver input internal pull-up to V <sub>CC</sub> |
| 22     | R2 <sub>OUT</sub> | TTL/CMOS receiver output                                  |
| 23     | R2 <sub>IN</sub>  | RS-232 receiver input                                     |
| 24     | T4 <sub>OUT</sub> | RS-232 driver output                                      |

## 2 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol      | Parameter                           | Value                          | Unit |
|-------------|-------------------------------------|--------------------------------|------|
| $V_{CC}$    | Supply voltage                      | -0.3 to 6                      | V    |
| $V_+$       | Extra positive voltage              | $(V_{CC} - 0.3)$ to 14         | V    |
| $V_-$       | Extra negative voltage              | -14 to 0.3                     | V    |
| $T_{IN}$    | Transmitter input voltage range     | -0.3 to $(V_{CC} + 0.3)$       | V    |
| $R_{IN}$    | Receiver input voltage range        | $\pm 30$                       | V    |
| $T_{OUT}$   | Transmitter output voltage range    | $(V_- - 0.3)$ to $(V_+ + 0.3)$ | V    |
| $R_{OUT}$   | Receiver output voltage range       | -0.3 to $(V_{CC} + 0.3)$       | V    |
| $T_{SHORT}$ | Short circuit duration on $t_{OUT}$ | Continuous                     |      |
| $T_{STG}$   | Storage temperature range           | -65 to 150                     | °C   |

*Note:* Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.  $V_+$  and  $V_-$  can have a maximum magnitude of +7V, but their absolute addition can not exceed 13 V.

### 3 Electrical characteristics

**Table 4. ESD Performance: transmitter outputs, receiver inputs**

| Symbol | Parameter              | Test condition                 | Min. | Typ. | Max. | Unit |
|--------|------------------------|--------------------------------|------|------|------|------|
| ESD    | ESD protection voltage | Human body model               | ± 15 |      |      | KV   |
| ESD    | ESD protection voltage | IEC-1000-4-2 Contact discharge | ± 8  |      |      | KV   |

**Table 5. Electrical characteristics**

( $C_1 - C_4 = 0.1 \mu\text{F}$ ,  $V_{CC} = 5 \text{ V} \pm 5\%$ ,  $T_A = \text{min. to max.}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ ).

| Symbol              | Parameter                     | Test condition                    | Min. | Typ. | Max. | Unit |
|---------------------|-------------------------------|-----------------------------------|------|------|------|------|
| $I_{\text{SUPPLY}}$ | $V_{CC}$ power supply current | No Load, $T_A = 25^\circ\text{C}$ |      | 2    | 5    | mA   |

**Table 6. Transmitter electrical characteristics**

( $C_1 - C_4 = 0.1 \mu\text{F}$ ,  $V_{CC} = 5 \text{ V} \pm 5\%$ ,  $T_A = \text{min. to max.}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ ).

| Symbol            | Parameter                     | Test condition  | Min. | Typ.  | Max. | Unit          |
|-------------------|-------------------------------|---|------|-------|------|---------------|
| $V_{\text{TOUT}}$ | Output voltage swing          | All Driver loaded with $3\text{K}\Omega$ to GND                   | ± 5  | ± 8.5 |      | V             |
| $R_{\text{OUT}}$  | Transmitter output resistance | $V_{CC} = V_+ = V_- = 0\text{V}$ $V_{\text{OUT}} = \pm 2\text{V}$ | 300  |       |      | $\Omega$      |
| $I_{\text{SC}}$   | Output short circuit current  |   |      | ± 18  | ± 60 | mA            |
| $I_{\text{IL}}$   | Input pull-up current         | $T_{\text{IN}} = 0\text{V}$                                       |      | 15    | 200  | $\mu\text{A}$ |
| $V_{\text{TIL}}$  | Input logic threshold low     |   |      |       | 0.8  | V             |
| $V_{\text{TIH}}$  | Input logic threshold high    |   | 2    |       |      | V             |

**Table 7. Receiver electrical characteristics**

( $C_1 - C_4 = 0.1 \mu\text{F}$ ,  $V_{CC} = 5 \text{ V} \pm 5\%$ ,  $T_A = \text{min. to max.}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ ).

| Symbol             | Parameter                              | Test condition                                   | Min. | Typ.         | Max. | Unit             |
|--------------------|--|--|------|--------------|------|------------------|
| $V_{\text{RIN}}$   | Receiver input voltage operating range |  | -30  |              | 30   | V                |
| $V_{\text{RIL}}$   | Input threshold low                    | $T_A = 25^\circ\text{C}$ $V_{CC} = 5\text{V}$    | 0.8  | 1.2          |      | V                |
| $V_{\text{RIH}}$   | Input threshold high                   | $T_A = 25^\circ\text{C}$ $V_{CC} = 5\text{V}$    |      | 1.7          | 2.4  | V                |
| $V_{\text{RIHYS}}$ | Input hysteresis                       | $V_{CC} = 5\text{V}$ , no hysteresis in shutdown | 0.2  | 0.5          | 1    | V                |
| $R_{\text{RIN}}$   | Input resistance                       | $T_A = 25^\circ\text{C}$ $V_{CC} = 5\text{V}$    | 3    | 5            | 7    | $\text{K}\Omega$ |
| $V_{\text{OL}}$    | Output voltage low                     |  |      |              | 0.4  | V                |
| $V_{\text{OH}}$    | Output voltage high                    | $I_{\text{OUT}} = -1\text{mA}$                   | 3.5  | $V_{CC}-0.4$ |      | V                |

**Table 8. Timing characteristics**

( $C_1 - C_4 = 0.1 \mu\text{F}$ ,  $V_{CC} = 5\text{V} \pm 5\%$ ,  $T_A = \text{min. to max.}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ ).

| Symbol                   | Parameter                     | Test condition   | Min. | Typ. | Max. | Unit                   |
|--------------------------|-------------------------------|--|------|------|------|------------------------|
| $D_R$                    | Maximum data rate             | $R_L = 3\text{k}\Omega$ to $7\text{k}\Omega$<br>$C_L = 50\text{pF}$ to $1000\text{pF}$<br>one transmitter switching  | 150  | 240  |      | Kbps                   |
|                          |                               | $R_L = 3\text{k}\Omega$ to $7\text{k}\Omega$ $C_L = 50\text{pF}$ to $150\text{pF}$<br>one transmitter switching  | 230  | 300  |      | Kbps                   |
| $t_{PHLR}$<br>$t_{PLHR}$ | Receiver propagation delay    | All drivers loaded with $3\text{k}\Omega$ to GND   |      | 0.2  | 10   | $\mu\text{s}$          |
| $t_{PHLT}$<br>$t_{PLHT}$ | Transmitter propagation delay | $R_L = 3\text{k}\Omega$ $C_L = 2500\text{pF}$<br>All transmitter loaded  |      | 2    | 3    | $\mu\text{s}$          |
| SR                       | Transition-region slew rate   | $T_A = 25^\circ\text{C}$ $R_L = 3$ to $7 \text{ k}\Omega$ $V_{CC} = 5 \text{ V}$<br>$C_L = 50\text{pF}$ to $1000\text{pF}$ measured from<br>$+3\text{V}$ to $-3\text{V}$ or $-3\text{V}$ to $+3\text{V}$ | 3    | 7    | 30   | $\text{V}/\mu\text{s}$ |

# 4 Typical application

Figure 2. Application circuit

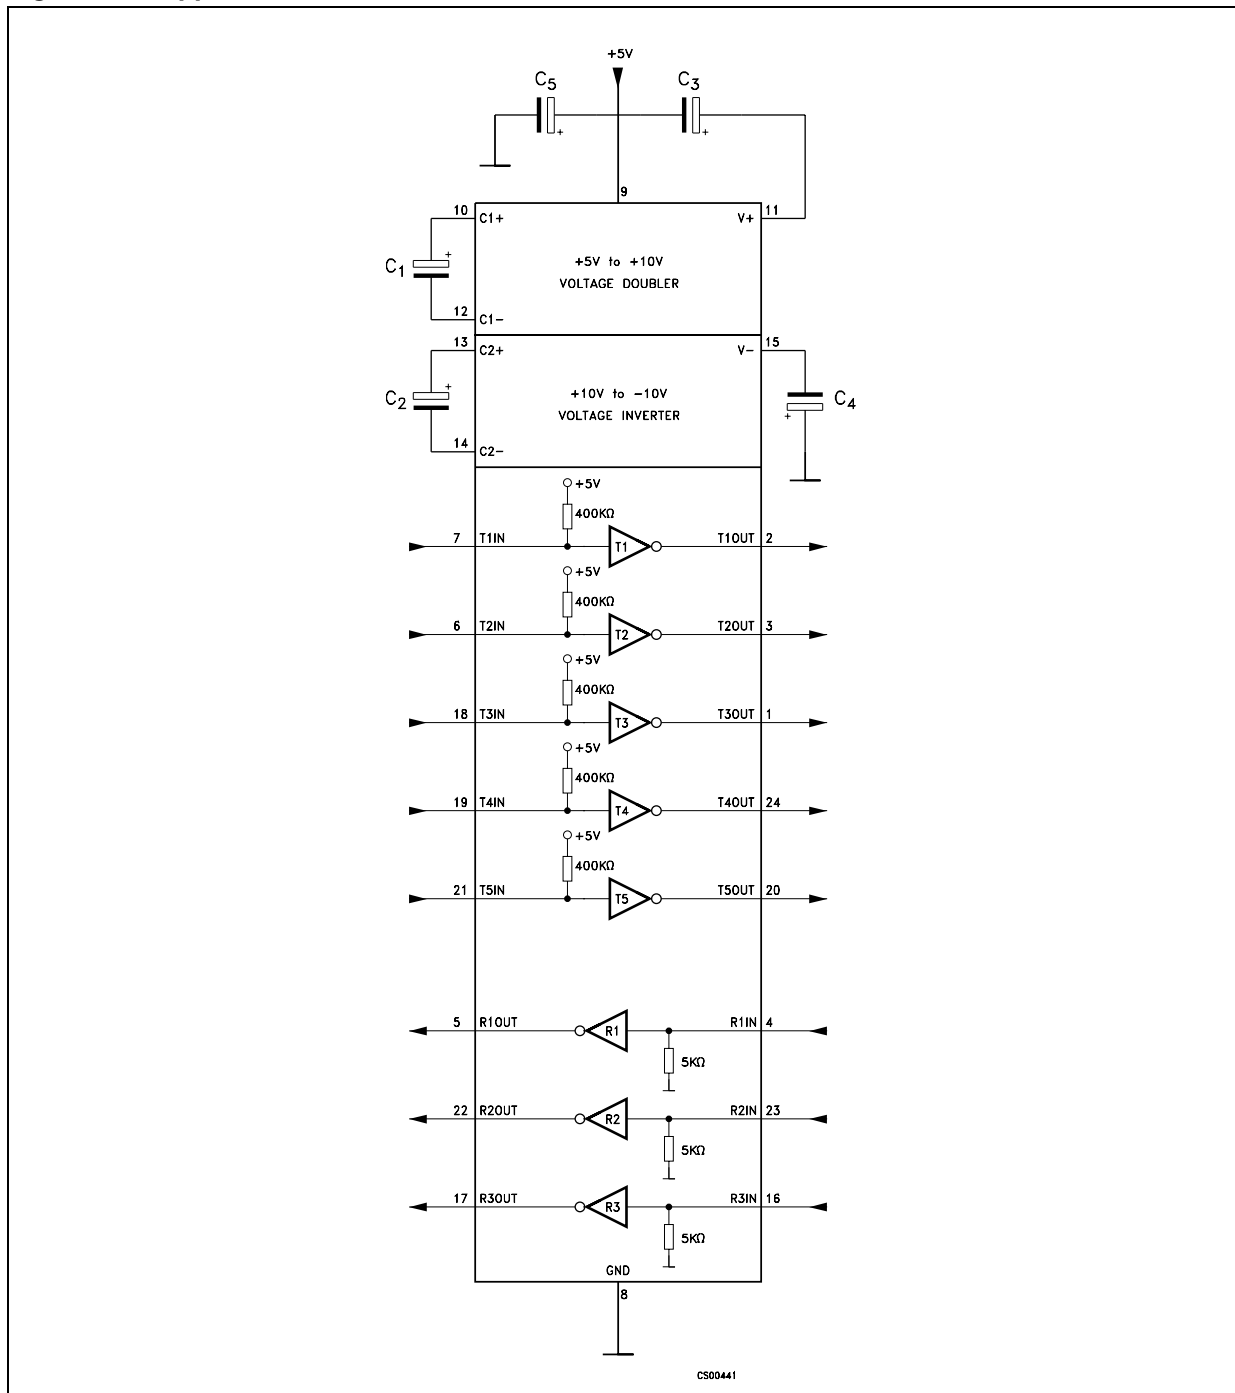


Table 9. Capacitance value (μF)

| C1  | C2  | C3  | C4  | C5  |
|-----|-----|-----|-----|-----|
| 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |




## 5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).


**SSOP24 mechanical data**

| Dim. | mm.  |          |      | inch. |            |       |
|------|------|----------|------|-------|------------|-------|
|      | Min. | Typ.     | Max. | Min.  | Typ.       | Max.  |
| A    |      |          | 2    |       |            | 0.079 |
| A1   | 0.05 |          |      | 0.002 |            |       |
| A2   | 1.65 | 1.75     | 1.85 | 0.065 | 0.069      | 0.073 |
| b    | 0.22 |          | 0.38 | 0.009 |            | 0.015 |
| c    | 0.09 |          | 0.25 | 0.004 |            | 0.010 |
| D    | 7.9  | 8.2      | 8.5  | 0.311 | 0.323      | 0.335 |
| E    | 7.4  | 7.8      | 8.2  | 0.291 | 0.307      | 0.323 |
| E1   | 5.00 | 5.3      | 5.6  | 0.197 | 0.209      | 0.220 |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |       |
| K    | 0°   |          | 8°   | 0°    |            | 8°    |
| L    | 0.55 | 0.75     | 0.95 | 0.022 | 0.030      | 0.037 |

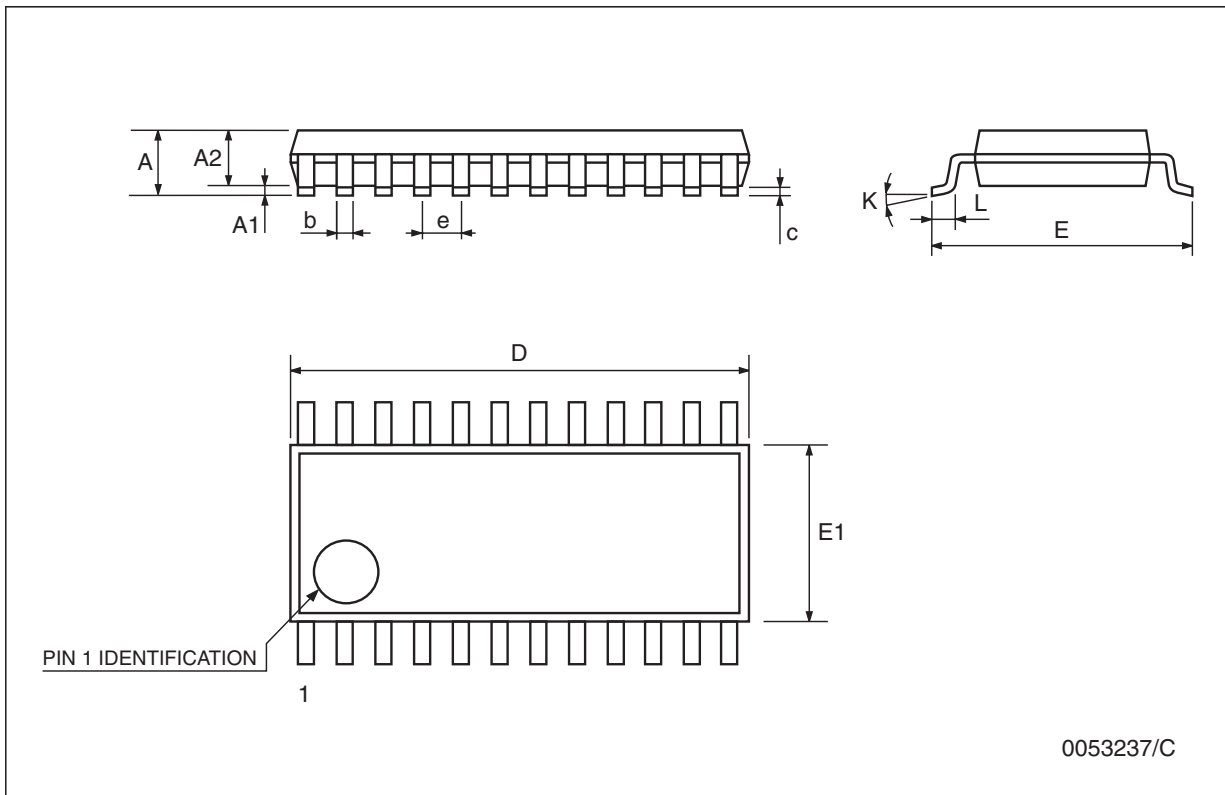

**TSSOP24 mechanical data**

| Dim. | mm.  |          |      | inch.  |            |        |
|------|------|----------|------|--------|------------|--------|
|      | Min. | Typ.     | Max. | Min.   | Typ.       | Max.   |
| A    |      |          | 1.1  |        |            | 0.043  |
| A1   | 0.05 |          | 0.15 | 0.002  |            | 0.006  |
| A2   |      | 0.9      |      |        | 0.035      |        |
| b    | 0.19 |          | 0.30 | 0.0075 |            | 0.0118 |
| c    | 0.09 |          | 0.20 | 0.0035 |            | 0.0079 |
| D    | 7.7  |          | 7.9  | 0.303  |            | 0.311  |
| E    | 4.3  |          | 4.5  | 0.169  |            | 0.177  |
| e    |      | 0.65 BSC |      |        | 0.0256 BSC |        |
| H    | 6.25 |          | 6.5  | 0.246  |            | 0.256  |
| K    | 0°   |          | 8°   | 0°     |            | 8°     |
| L    | 0.50 |          | 0.70 | 0.020  |            | 0.028  |

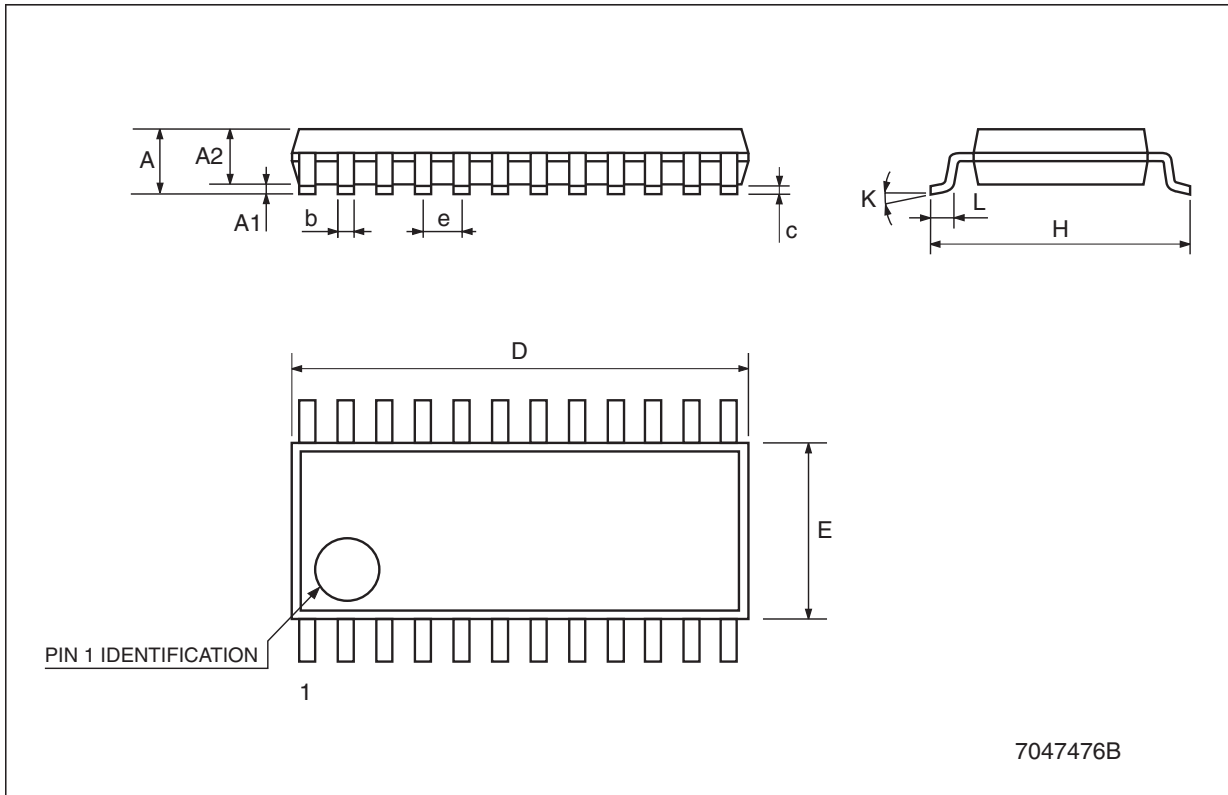


7047476B




**Tape & reel SSOP24 mechanical data**

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 22.4 |       |      | 0.882  |
| Ao   | 8.4  |      | 8.6  | 0.331 |      | 0.339  |
| Bo   | 8.7  |      | 8.9  | 0.343 |      | 0.351  |
| Ko   | 2.9  |      | 3.1  | 0.114 |      | 0.122  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 11.9 |      | 12.1 | 0.468 |      | 0.476  |

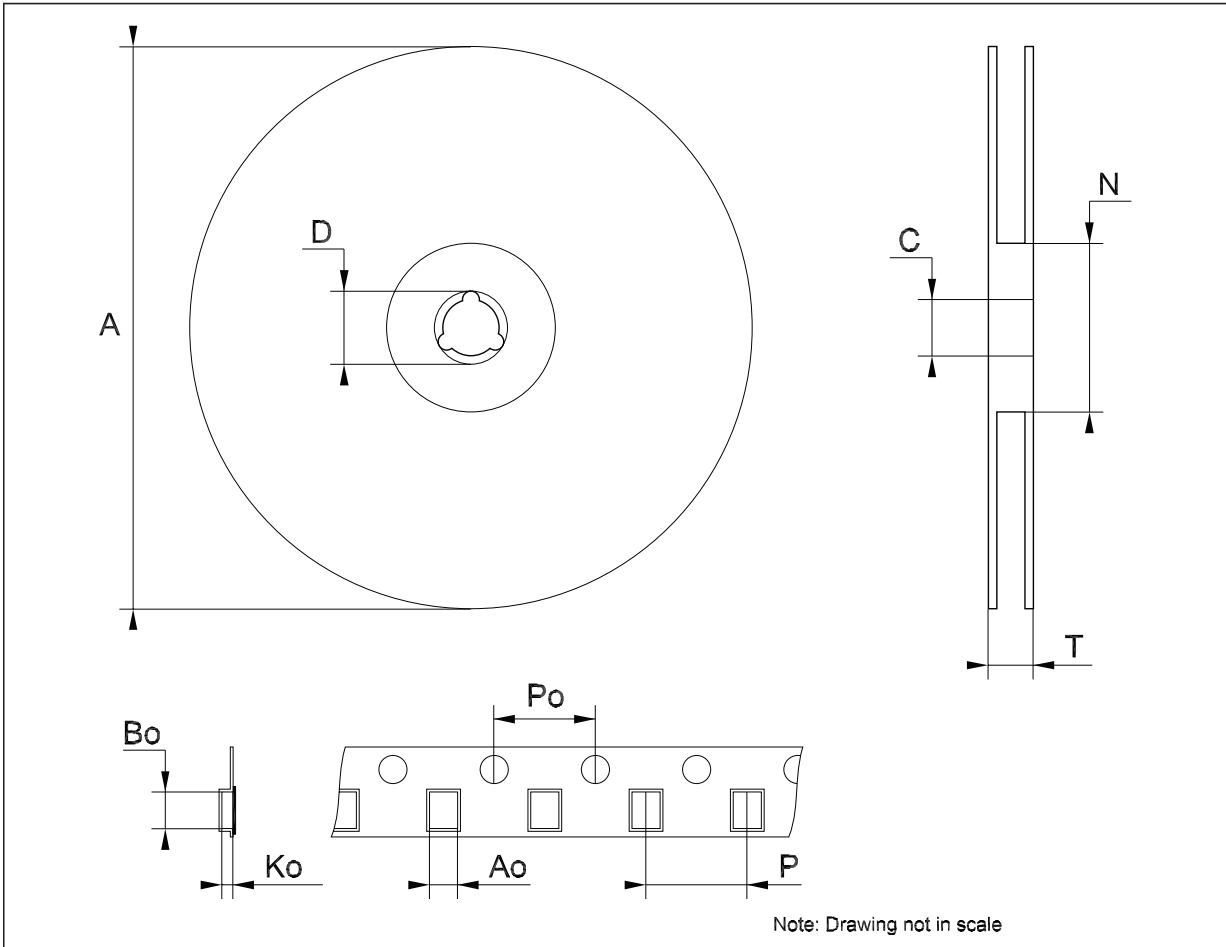

**Tape & reel TSSOP24 mechanical data**

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 22.4 |       |      | 0.882  |
| Ao   | 6.8  |      | 7    | 0.268 |      | 0.276  |
| Bo   | 8.2  |      | 8.4  | 0.323 |      | 0.331  |
| Ko   | 1.7  |      | 1.9  | 0.067 |      | 0.075  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 11.9 |      | 12.1 | 0.468 |      | 0.476  |

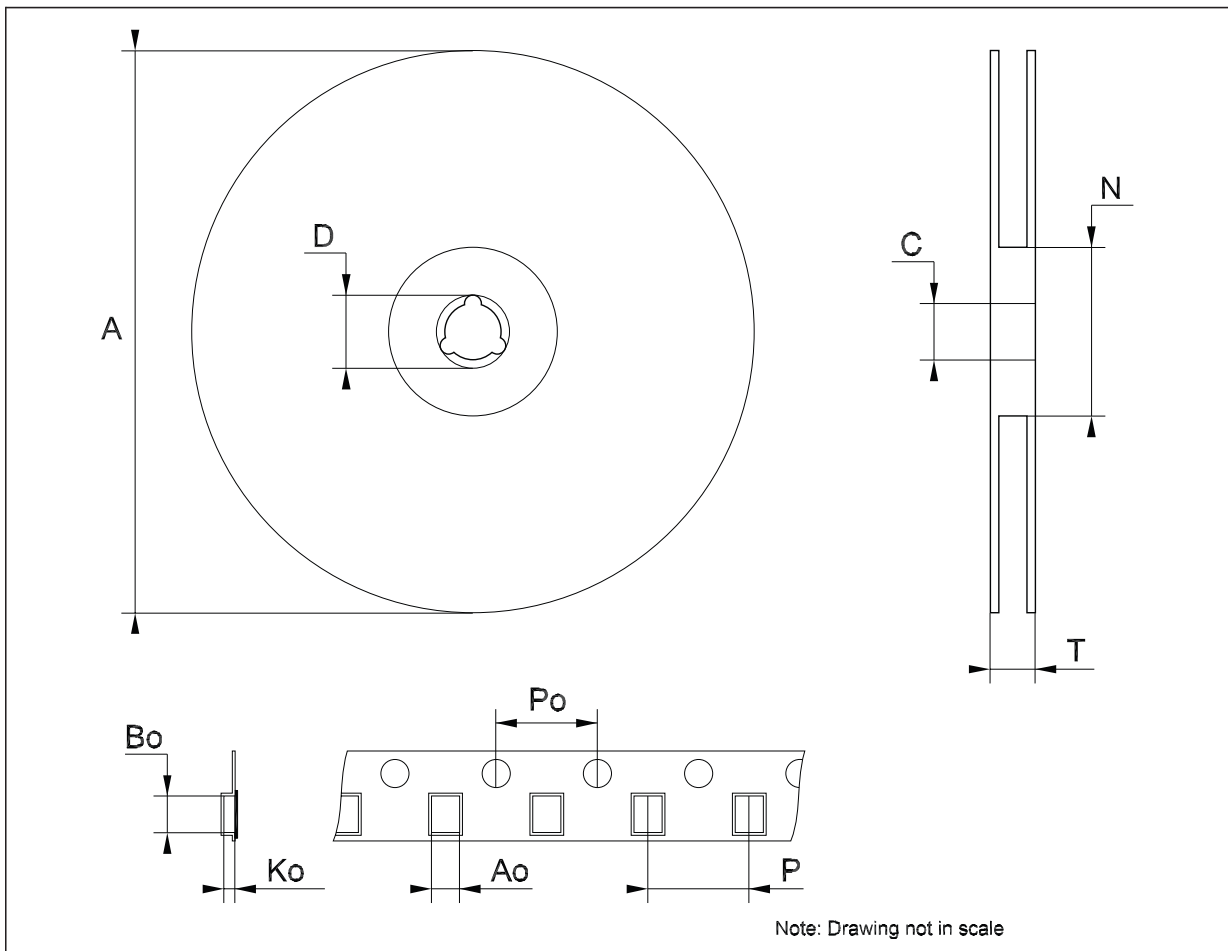

## 6 Revision history

Table 10. Revision history

| Date        | Revision | Changes  |
|-------------|----------|--|
| 09-Feb-2005 | 13       | Mistake on Table 1.                            |
| 14-Mar-2006 | 14       | Order codes has been updated and new template. |
| 22-Aug-2007 | 15       | Added <a href="#">Table 1</a> . in cover page. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

