

# NLAS3257

## Mux / Demux Analog Switch

The NLAS3257 Mux / Demux Analog Switch is an advanced high-speed single pole double throw (SPDT) analog switch in ultra-small footprint.

### Features

- High Speed:  $t_{PD} = 0.25 \text{ ns (Max) @ } V_{CC} = 4.5 \text{ V}$
- $R_{ON} = 7.5 \Omega$ , Typ @  $V_{CC} = 4.2 \text{ V}$
- $C_{ON} = 7.5 \text{ pF}$ , Typ @  $V_{CC} = 3.3 \text{ V}$
- $V_{CC}$  Range: 1.65 V to 4.5 V
- Ultra-Small 1 x 1 mm Package
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Typical Applications

- Mobile Phones, PDAs, Camera




Figure 1. XLLGA6 (Top View)

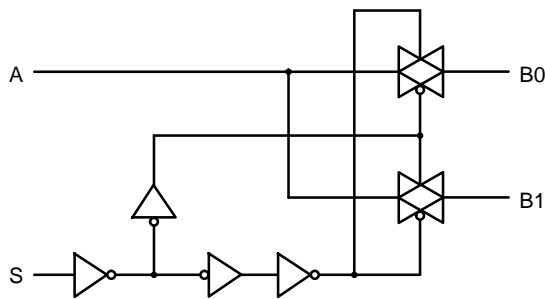


Figure 2. Logic Diagram

### Function Table

Input S	Function
L	A = B0
H	A = B1



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

### MARKING DIAGRAM



XLLGA6  
1.0 x 1.0  
CASE 713AD



L = Specific Device Code  
M = Date Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

# NLAS3257

**Table 1. MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_{CC}$	DC Supply Voltage	-0.5 to +5.5	V
$V_{IN}$	Control Input Voltage (S Pin)	-0.5 to +5.5	V
$V_{I/O}$	Switch Input / Output Voltage (A, B0, B1 Pins)	-0.5 to +5.5	V
$I_{IK}$	Control Pin DC Input Diode Current (S Pin) $V_{IN} < GND$	-50	mA
$I_{OK}$	Switch I/O Port DC Diode Current (A, B0, B1 Pins) $V_{I/O} < GND$ or $V_{I/O} > V_{CC}$	$\pm 50$	mA
$I_O$	On-State Switch Current	$\pm 128$	mA
	Continuous Current Through $V_{CC}$ or GND	$\pm 150$	mA
$I_{CC}$	DC Supply Current per Supply Pin	$\pm 150$	mA
$I_{GND}$	DC Ground Current per Ground Pin	$\pm 150$	mA
$T_{STG}$	Storage Temperature Range	-65 to +150	$^{\circ}C$
$T_L$	Lead Temperature, 1 mm from Case for 10 Seconds	260	$^{\circ}C$
$T_J$	Junction Temperature Under Bias	150	$^{\circ}C$
$\theta_{JA}$	Thermal Resistance (Note 1) XLLGA6	466	$^{\circ}C/W$
$P_D$	Power Dissipation in Still Air at 85 $^{\circ}C$ (Note 1) XLLGA6	269	mW
MSL	Moisture Sensitivity	Level 1	
$F_R$	Flammability Rating Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
$V_{ESD}$	ESD Withstand Voltage Human Body Mode (Note 2) Machine Mode (Note 3) Charged Device Mode (Note 4)	>6000	V
		>200	
		N/A	
$I_{LATCHUP}$	Latchup Performance Above $V_{CC}$ and Below GND at 85 $^{\circ}C$ (Note 5)	$\pm 100$	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
2. Tested to EIA/ JESD22-A114-A
3. Tested to EIA/ JESD22-A115-A
4. Tested to JESD22-C101-A
5. Tested to EIA / JESD78.

**Table 2. RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
$V_{CC}$	Positive DC Supply Voltage	1.65	4.5	V
$V_I$	Control Pin Input Voltage (S Pin)	0	4.5	V
$V_{I/O}$	Switch Input / Output Voltage (A, B0, B1 Pins)	0	$V_{CC}$	V
$T_A$	Operating Free-Air Temperature	-40	+85	$^{\circ}C$
$\Delta t / \Delta V$	Input Transition Rise or Fall Rate Control Input Switch I/O	0	20	ns/V
		0	DC	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# NLAS3257

**Table 3. DC ELECTRICAL CHARACTERISTICS** (Typical: T = 25°C, V<sub>CC</sub> = 3.3 V)

Symbol	Parameter	Test Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Unit
				Min	Typ	Max	
V <sub>IH</sub>	Control Input, High Voltage (S Pin)		2.7 3.3 4.2	0.8 1.0 1.25			V
V <sub>IL</sub>	Control Input, Low Voltage (S Pin)		2.7 3.3 4.2			0.3 0.4 0.5	V
I <sub>IN</sub>	Control Input, Leakage Current (S Pin)	0 ≤ V <sub>IN</sub> ≤ V <sub>CC</sub>	1.65 – 4.5		±0.5	±1.0	μA
I <sub>B0/B1_OFF</sub>	Off State Leakage Current (B0/B1 Pins)	V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> V <sub>B0</sub> and V <sub>B1</sub> = 0.3 V V <sub>A</sub> = 4 V	4.5		±20	±100	nA
I <sub>A_ON</sub>	On State Leakage Current (A Pin)	V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> V <sub>B0</sub> = 0.3 V or 4 V with V <sub>B1</sub> = Floating or V <sub>B1</sub> = 0.3 V or 4 V with V <sub>B0</sub> = Floating V <sub>A</sub> = 0.3 V or 4.0 V	4.5		±20	±100	nA
I <sub>Power_OFF</sub>	Power Off Leakage Current (S Pin)	V <sub>IN</sub> = 0 or 4.5 V	0			±100	nA
I <sub>CC</sub>	Quiescent Supply Current (V <sub>CC</sub> Pin)	V <sub>IN</sub> = V <sub>CC</sub> or GND, V <sub>IS</sub> = V <sub>CC</sub> or GND, I <sub>Load</sub> = 0 A	1.65 – 4.5		0.1	1.0	μA
ΔI <sub>CC</sub>	Additional Quiescent Supply Current (V <sub>CC</sub> Pin)	V <sub>IN</sub> = V <sub>CC</sub> or GND, V <sub>IS</sub> = V <sub>CC</sub> or GND, I <sub>Load</sub> = 0 A	3.3 4.2			2.0 3.0	mA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

**Table 4. ON RESISTANCE** (Typical: T = 25°C)

Symbol	Parameter	Test Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Unit
				Min	Typ	Max	
R <sub>ON</sub>	ON-Resistance	I <sub>ON</sub> = 8 mA, V <sub>IS</sub> = 0 V to V <sub>CC</sub>	2.7 3.3 4.2		9.3 8.7 7.5		Ω
R <sub>FLAT</sub>	ON-Resistance Flatness	I <sub>ON</sub> = 8 mA, V <sub>IS</sub> = 0 V to V <sub>CC</sub>	2.7 3.3 4.2		3.6 3.3 2.9		Ω
ΔR <sub>ON</sub>	Delta ON- Resistance	I <sub>ON</sub> = 8 mA, V <sub>IS</sub> = 0 V to V <sub>CC</sub>	2.7 3.3 4.2		0.8 0.7 0.5		Ω

# NLAS3257

## AC ELECTRICAL CHARACTERISTICS

**Table 5. TIMING/FREQUENCY** (Typical: T = 25°C, V<sub>CC</sub> = 3.3 V, R<sub>L</sub> = 50 Ω, C<sub>L</sub> = 5 pF, f = 1 MHz)

Symbol	Parameter	Test Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Unit
				Min	Typ	Max	
t <sub>PD</sub>	Propagation Delay, A to Bn or Bn to A		1.65 – 4.5			0.25	ns
t <sub>ON</sub>	Turn-ON Time	(See Figures 4 and 5)	1.65 – 4.5		12	30	ns
t <sub>OFF</sub>	Turn-OFF Time	(See Figures 4 and 5)	1.65 – 4.5		8.0	25	ns
t <sub>BBM</sub>	Break-Before-Make Time	(See Figure 3)	1.65 – 4.5	2.0			ns
BW	-3 dB Bandwidth	C <sub>L</sub> = 5 pF	1.65 – 4.5		900		MHz

**Table 6. ISOLATION** (Typical: T = 25°C, V<sub>CC</sub> = 3.3 V, R<sub>L</sub> = 50 Ω, C<sub>L</sub> = 5 pF)

Symbol	Parameter	Test Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Unit
				Min	Typ	Max	
O <sub>IRR</sub>	OFF-Isolation	f = 240 MHz (See Figure 6)	1.65 – 4.5		-21		dB
X <sub>TALK</sub>	Non-Adjacent Channel Crosstalk	f = 240 MHz	1.65 – 4.5		-21		dB

**Table 7. CAPACITANCE** (Typical: T = 25°C, V<sub>CC</sub> = 3.3 V, f = 1 MHz)

Symbol	Parameter	Test Condition	T <sub>A</sub> = -40°C to +85°C			Unit
			Min	Typ	Max	
C <sub>IN</sub>	Control Input Capacitance	S pin			2.0	pF
C <sub>ON</sub>	ON Capacitance	Switch ON A to B0 A to B1			7.5	pF
C <sub>OFF</sub>	OFF Capacitance	Switch OFF B0 OFF B1 OFF			2.5	pF

# NLAS3257

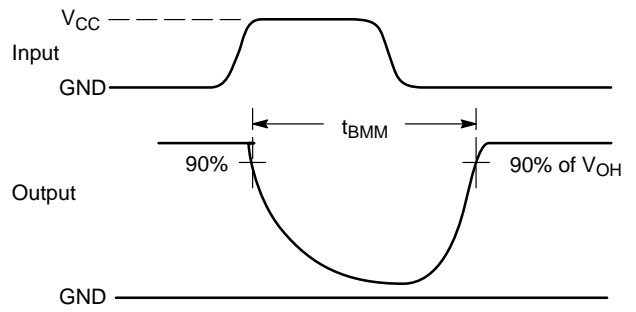
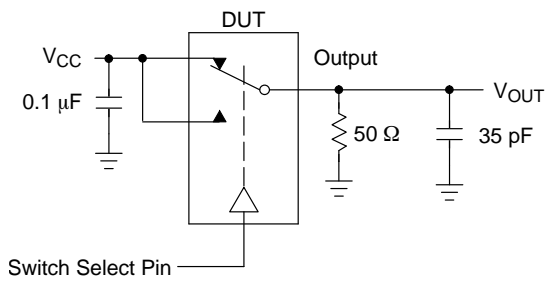


Figure 3.  $t_{BMM}$  (Time Break-Before-Make)

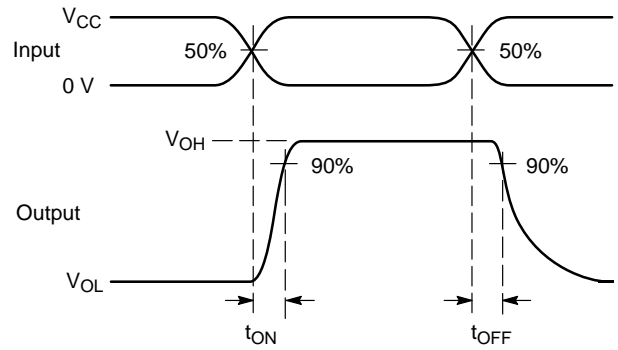
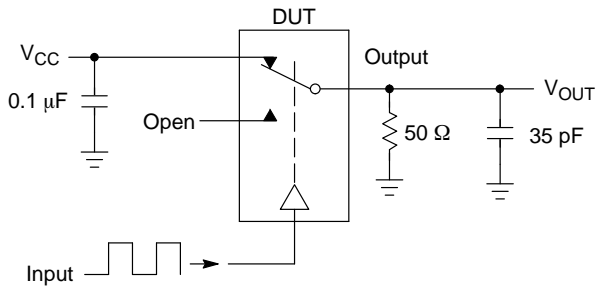


Figure 4.  $t_{ON}/t_{OFF}$



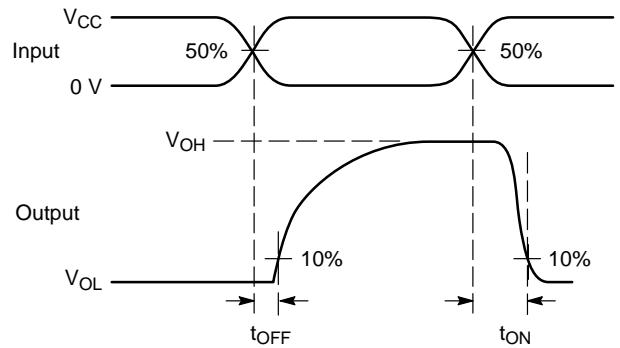


Figure 5.  $t_{ON}/t_{OFF}$

# NLAS3257

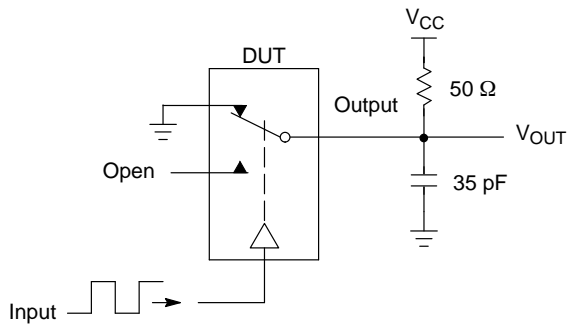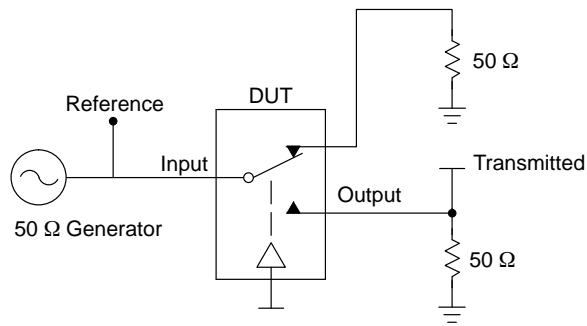

Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch.  $V_{ISO}$ , Bandwidth and  $V_{ONL}$  are independent of the input signal direction.

$$V_{ISO} = \text{Off Channel Isolation} = 20 \text{ Log} \left( \frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz}$$

$$V_{ONL} = \text{On Channel Loss} = 20 \text{ Log} \left( \frac{V_{OUT}}{V_{IN}} \right) \text{ for } V_{IN} \text{ at } 100 \text{ kHz to } 50 \text{ MHz}$$

Bandwidth (BW) = the frequency 3 dB below  $V_{ONL}$

$V_{CT}$  = Use  $V_{ISO}$  setup and test to all other switch analog input/outputs terminated with 50  $\Omega$

**Figure 6. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/ $V_{ONL}$**

## DEVICE ORDERING INFORMATION


Device	Package	Shipping†
NLAS3257CMX2TCG	XLLGA6 – 1.0 x 1.0, 0.35P (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NLAS3257

## PACKAGE DIMENSIONS

### XLLGA6 1.0x1.0, 0.35P CASE 713AD ISSUE O


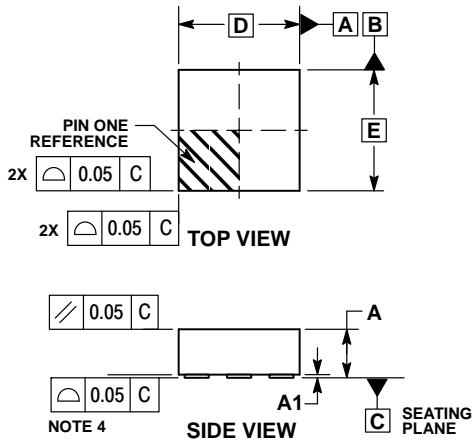


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994 .
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO THE PLATED TERMINALS AND IS MEASURED BETWEEN 0.15 AND 0.25 MM FROM THE TERMINAL TIPS.
4. COPLANARITY APPLIES TO ALL OF THE TERMINALS.

DIM	MILLIMETERS	
	MIN	MAX
A	---	0.40
A1	0.00	0.05
b	0.17	0.23
D	1.00 BSC	
E	1.00 BSC	
e	0.35 BSC	
e2	0.60 BSC	
L	0.27	0.33
L1	0.05 REF	

### RECOMMENDED SOLDERING FOOTPRINT\*

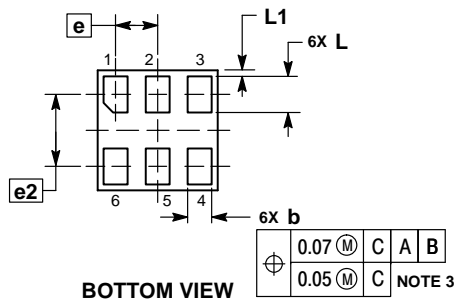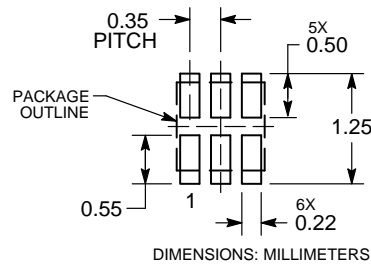

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

##### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

NLAS3257/D