

# Model 162, 164

Vishay Spectrol



## 1/2" (12.7mm) Ten Turn Wirewound Precision Potentiometer



### FEATURES

- Bushing or Servo
- 100Ω to 100KΩ

### ELECTRICAL SPECIFICATIONS

PARAMETER		
Total Resistance	<b>STANDARD</b>	<b>SPECIAL</b>
Standard Range	100Ω to 100KΩ	115KΩ
Tolerance	± 5%	± 1%
Linearity (Independent)	<b>STANDARD</b>	<b>BEST PRACTICAL</b>
	± 0.30%	± 0.15%
Noise	100Ω ENR	
Rotation	3600° + 15° -0°	
Power Rating: Section 1:	2.0 watt at 40°C ambient, derated to zero at 125°C	
Insulation Resistance	100MΩ minimum, 500VDC	
Dielectric Strength	500V <sub>RMS</sub> , 60HZ	
Absolute Minimum Resistance	Linearity x total resistance or 0.5Ω, whichever is greater	
End Voltage	Linearity x total applied voltage for total resistance above 20Ω, 2.0% of total applied voltage for 20Ω and below	

### MATERIAL SPECIFICATIONS

Housing and Lids	Molded, glass filled, thermoset plastic
Bushing	Brass, nickel plated (162 only)
Front Lid	Aluminum, anodized (164 only)
Shaft	Stainless steel, non-passivated
Terminals	Brass, plated for solderability
Bushing Mount Hardware	
Lockwasher Internal tooth:	Steel, nickel plated
Panel Nut: (162 only)	Brass, nickel plated

### MARKING

<b>Unit Identification</b>	Units shall be marked with Spectrol name and model no, resistance and resistance tolerance, linearity, terminal identification and date code
----------------------------	--

### ENVIRONMENTAL SPECIFICATIONS

Vibration	15g thru 2000 Hz
Shock	50g
Salt Spray	48 Hours
Rotational Life	500,000 Shaft Revolutions
Temperature Range	- 55°C to + 125°C
Moisture Resistant	-

### ORDERING INFORMATION

The Model 162 and 164 can be ordered from this data sheet with a variety of alternate characteristics, as shown. For most rapid service on your order, please state:

**162, 164**  
MODEL


**XXX**  
TOTAL RESISTANCE  
EIA CODE

NOTE: Model 164 is not distributor item  
Example: Model 162, 10K  
Example: **162, 164 - 1**

Other characteristics will be standard as described on this data sheet. If special characteristics are required, such as: special linearity tolerance, special resistance tolerance, extra taps, non-linear functions, etc., please state these on your order and allow additional lead time for delivery.




**DIMENSIONS** in inches (millimeters)

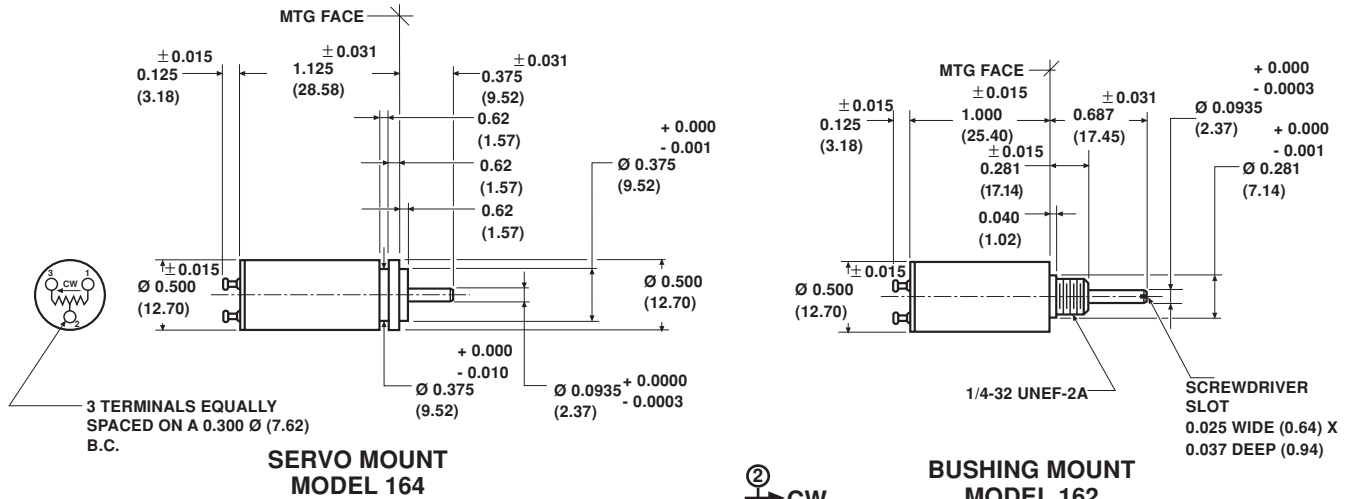

TOLERANCES: UNLESS OTHERWISE NOTED.  
DECIMALS ± 0.005 ANGLES ± 2°

MECHANICAL SPECIFICATIONS		
PARAMETER		
Mechanical Rotation	3600°, + 15° - 0°	
Bearing Type	<b>162 Sleeve</b>	<b>164 Ball</b>
Torque (Maximum)		
	<b>STARTING</b>	
	<b>RUNNING</b>	
Mechanical Runouts (Maximums):		
Shaft (TIR)	0.003 in (0.08cm)	0.002 in (0.05cm)
Pilot Dia. (TIR)	0.003 in (0.08cm)	0.003 in (0.08cm)
Lateral (TIR)	0.005 in (0.13cm)	0.003 in (0.08cm)
Shaft End Play	0.010 in (0.25cm)	0.005 in (0.13cm)
Shaft Radial Play	0.003 in (0.08cm)	0.002 in (0.05cm)
Weight	0.3 oz (8.50gm) maximum	
Stop Strength	20 oz - in (static) (1.44 Kg - cm)	

**POWER RATING CHART**

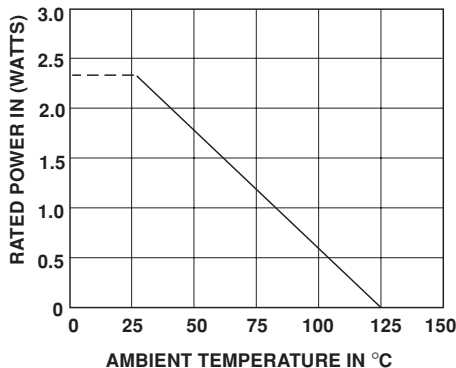

RESISTANCE ELEMENT DATA					
STANDARD RESISTANCE VALUES (Ω)	RESOLUTION (%)	OHMS PER TURN	MAXIMUM CURRENT AT 40°C AMBIENT (mA)	MAXIMUM VOLTAGE ACROSS COIL (V)	WIRE TEMP. COEF. (ppm/°C)
100	0.092	0.092	141	14	20
200	0.069	0.138	100	20	20
500	0.049	0.245	63	32	20
1K	0.047	0.470	45	45	20
2K	0.038	0.763	32	64	20
5K	0.031	1.56	20	100	20
10K	0.025	2.55	14	140	20
20K	0.020	3.94	10	200	20
30K	0.018	5.34	8.2	246	20
50K	0.015	7.64	6.3	315	20
100K	0.013	13.2	4.5	450	20



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.