



PRELIMINARY
CONFIDENTIAL *

Low Profile, High Current Inductor



Manufactured under one or more of the following:
US Patents; 6,198,375/6,204,744/6,449,829/6,460,244.
 Several foreign patents, and other patents pending.


FEATURES

- Shielded construction.
- Frequency range up to 1.0MHz.
- Lowest DCR/ μ H, in this package size.
- Handles high transient current spikes without saturation.
- Ultra low buzz noise, due to composite construction.
- Tin/Lead plated (not dipped) terminals

APPLICATIONS

- PDA/Notebook/Desktop/Server applications.
- High current POL converters.
- Low profile, high current power supplies.
- Battery powered devices.
- DC/DC converters in distributed power systems.
- DC/DC converter for Field Programmable Gate Array (FPGA).

STANDARD ELECTRICAL SPECIFICATIONS				
Lo INDUCTANCE μ H \pm 20% @100KHz, .25V, 0A	DCR mOhms TYPICAL 25°C	DCR mOhms MAX 25°C	HEAT RATING CURRENT DC AMPS ₃ TYPICAL	SATURATION CURRENT DC AMPS ₄ TYPICAL
0.22	9.2	9.8	8.8	8.8
0.56	18.1	19.3	6.1	6.3
1.0	34.3	36.7	4.5	4.5
2.2	69.8	75.0	3.0	4.3

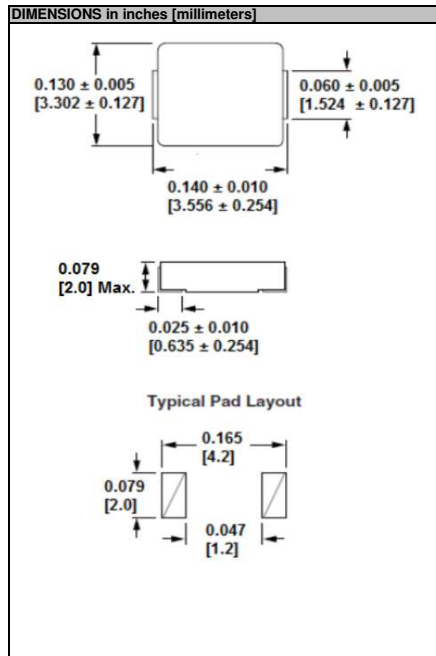

NOTES:

1. All test data is referenced to 25°C ambient.
2. Operating Temperature Range - 55°C to + 125°C
3. DC current (A) that will cause an approximate Δ T of 40°C.
4. DC current (A) that will cause Lo to drop approximately 20%
5. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

DESCRIPTION			
IHLP-1212BZ-1L MODEL	2.2 μ H INDUCTANCE VALUE	\pm 20% INDUCTANCE TOLERANCE	RZ Package Code

GLOBAL PART NUMBER																	
I	H	L	P	1	2	1	2	B	Z	R	Z	2	R	2	M	1	L
MODEL				SIZE				PACKAGE CODE		INDUCTANCE VALUE		INDUCTANCE TOLERANCE		SERIES			

This document is subject to change without notice
 THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?9100
 This document is confidential and not to be shared beyond the original recipient and Vishay without written permission from Vishay