

N-Channel 200-V (D-S) MOSFET


PRODUCT SUMMARY			
$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
200	1.2 @ $V_{GS} = 10$ V	2 to 4	0.56
	1.3 @ $V_{GS} = 6$ V		0.54

FEATURES


- TrenchFET® Power MOSFET

APPLICATIONS

- CRT Monitor HD Drive Circuit
- H-Drive Trans Switching

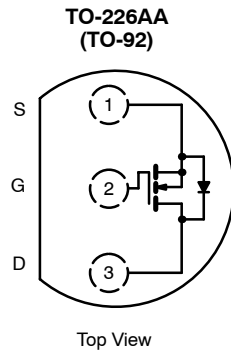

Device Marking
Front View



"S" = Siliconix Logo
xxyy = Date Code

Ordering Information: VN2001L-TR1

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limits	Unit
Drain-Source Voltage	V_{DS}	200	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_A = 25^\circ\text{C}$	A
		$T_A = 70^\circ\text{C}$	
Pulsed Drain Current ^a	I_{DM}	2	
Avalanche Current	I_{AS}	1.5	
Single Pulse Avalanche Energy			
Power Dissipation	P_D	$T_A = 25^\circ\text{C}$	W
		$T_A = 70^\circ\text{C}$	
Thermal Resistance, Junction-to-Ambient	R_{thJA}	156	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

Notes



- a. Pulse width limited by maximum junction temperature.

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 100 μA	200			V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	2.0	3.0	4.0	V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 200 V, V _{GS} = 0 V T _J = 55 °C			1	μA
					10	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = 10 V, V _{GS} = 10 V	1			A
Drain-Source On-Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 0.56 A		0.95	1.2	Ω
		V _{GS} = 6 V, I _D = 0.54 A		1.0	1.3	
Forward Transconductance ^a	g _{fs}	V _{DS} = 10 V, I _D = 0.56A		1.8		S
Diode Forward Voltage ^a	V _{SD}	I _S = 0.5 A, V _{GS} = 0 V		0.8	1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = 90 V, V _{GS} = 10 V, I _D = 0.5 A		3.6	6	nC
Gate-Source Charge	Q _{gs}			0.8		
Gate-Drain Charge	Q _{gd}			1.2		
Gate Resistance	R _g			4		Ω
Turn-On Delay Time	t _{d(on)}	V _{DD} = 100 V, R _L = 200 Ω I _D ≅ 0.5 A, V _{GEN} = 10 V R _G = 25 Ω		5.5	10	ns
Rise Time	t _r			10	16	
Turn-Off Delay Time	t _{d(off)}			22	40	
Fall Time	t _f			18	30	
Source-Drain Reverse Recovery Time	t _{rr}		I _F = 0.5 A, di/dt = 100 A/μs		28	

Notes

- a. Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

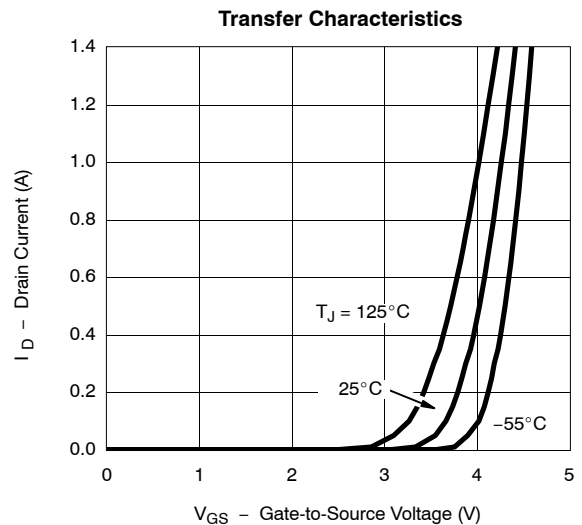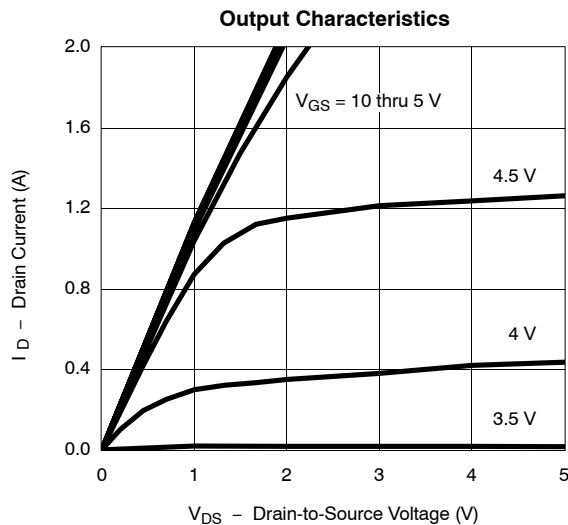




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


On-Resistance vs. Drain Current

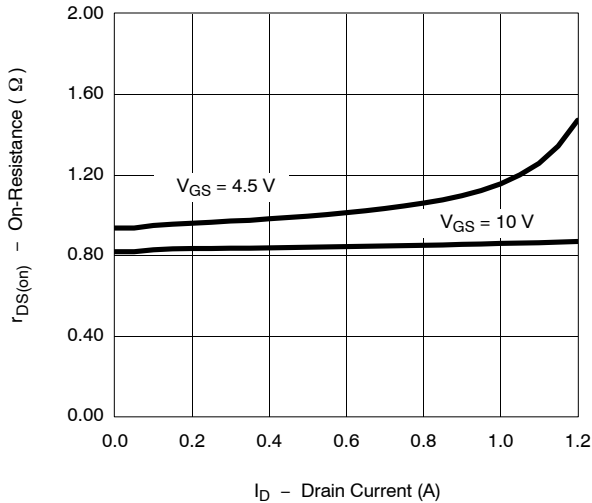


Capacitance

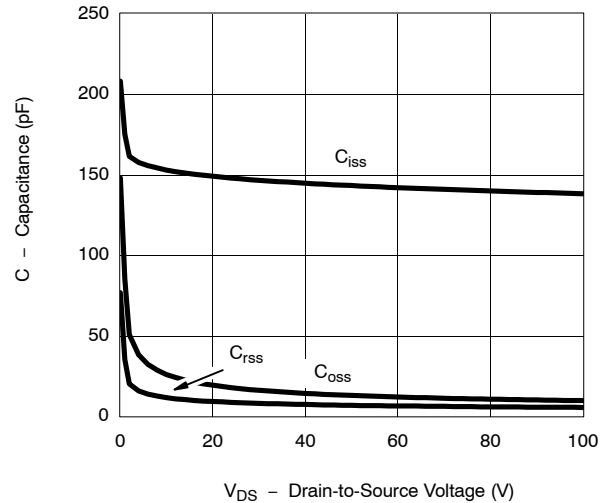


Gate Charge

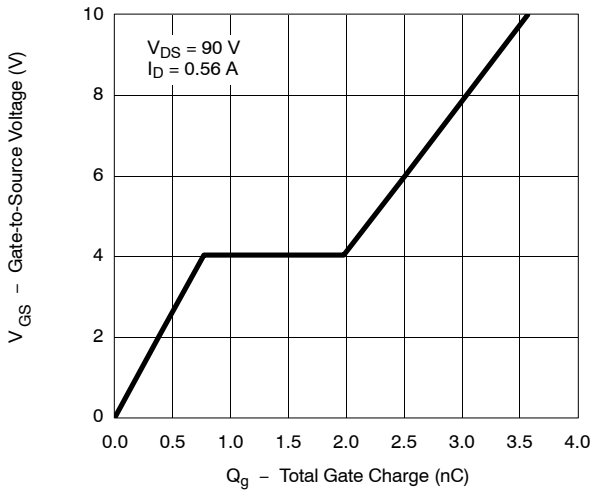


On-Resistance vs. Junction Temperature

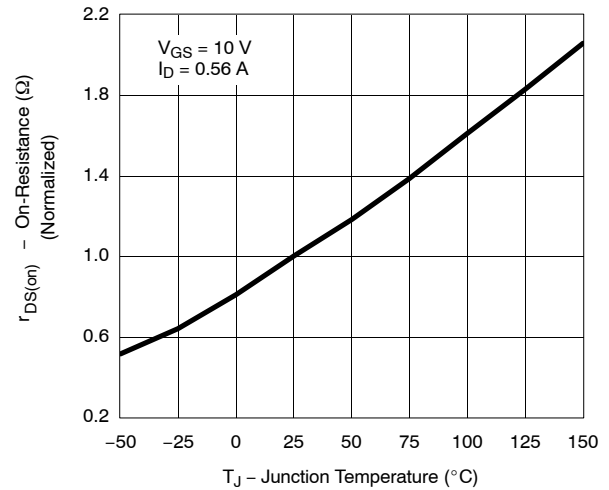




Source-Drain Diode Forward Voltage

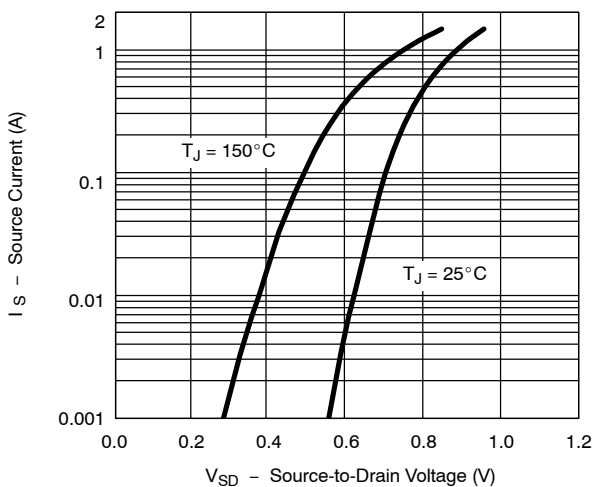

On-Resistance vs. Gate-to-Source Voltage

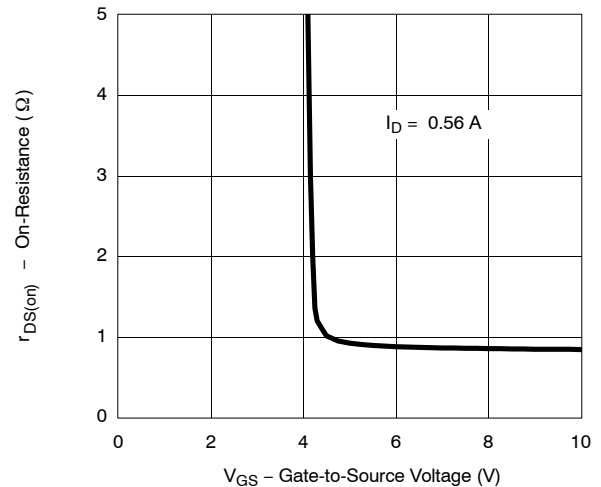

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

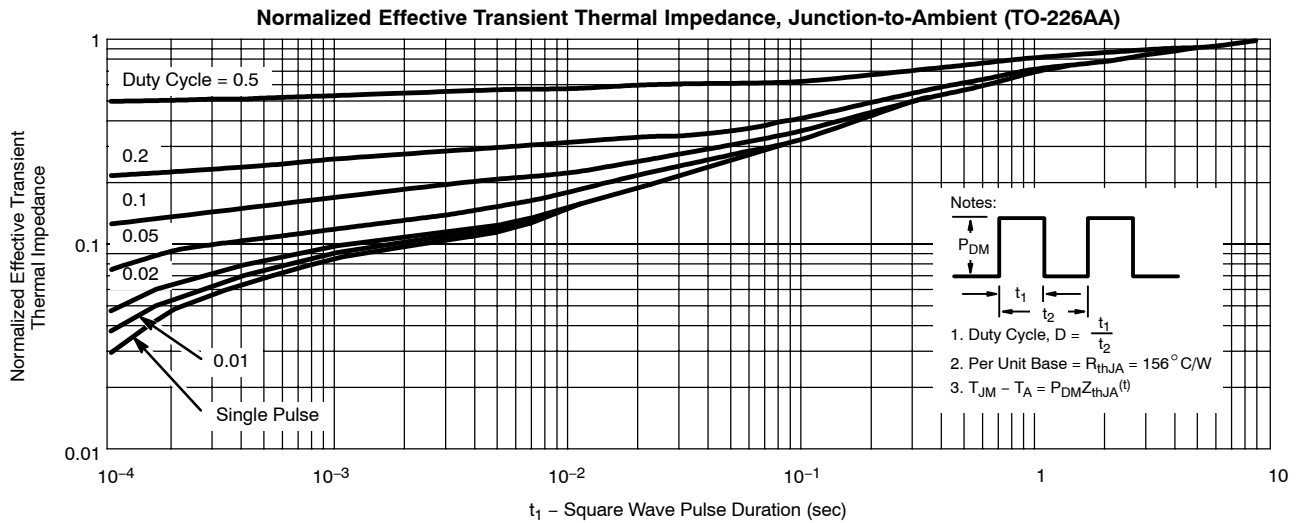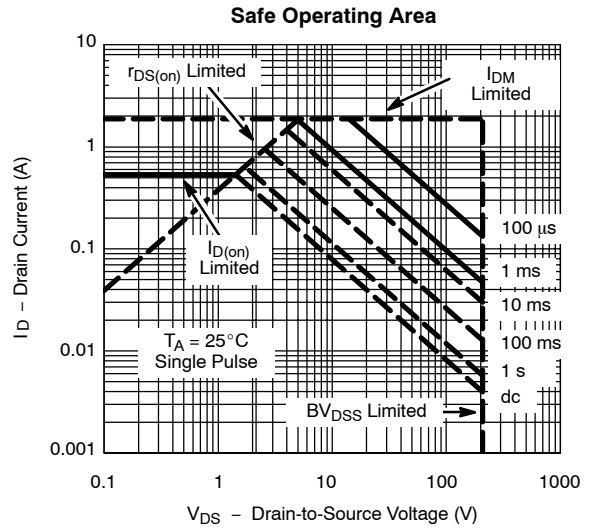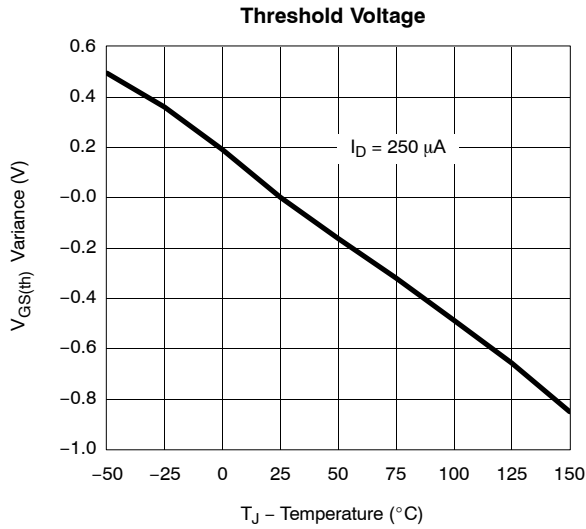



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.