


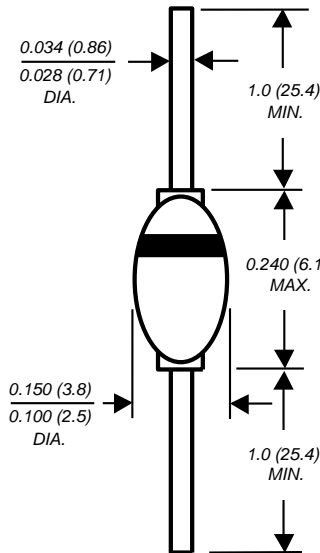

Glass Passivated Fast Switching Rectifier

Reverse Voltage 200 to 1000V
 Forward Current 1.0A

DO204AP


Dimensions in inches
 and (millimeters)

*Brazed-lead assembly
 is covered by
 Patent No. 3,930,306

Features

- High temperature metallurgically bonded construction
- Hermetically sealed package
- Cavity-free glass passivated junction
- 1.0 ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$
- Capable of meeting environmental standards of MIL-S-19500
- Fast switching for high efficiency
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375''$ (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AP Solid glass body

Terminals: Solder plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.02 oz., 0.56 g

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	1N5615	1N5617	1N5619	1N5621	1N5623	Unit
*Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
*Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V
*Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 55^\circ\text{C}$	$I_{F(AV)}$	1.0					A
*Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50					A
Typical thermal resistance (Note 1)	$R_{\theta JA}$	55					$^\circ\text{C}/\text{W}$
*Operating junction temperature range	T_J	-65 to +175					$^\circ\text{C}$
*Storage temperature range	T_{STG}	-65 to +200					$^\circ\text{C}$

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	1N5615	1N5617	1N5619	1N5621	1N5623	Unit
*Minimum reverse breakdown voltage at $50\mu\text{A}$	$V_{(BR)}$	220	440	660	880	1100	V
*Maximum instantaneous forward voltage at 1.0A	V_F	1.2					V
*Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$ $T_A = 200^\circ\text{C}$	I_R	0.5 25 1500					μA
*Maximum reverse recovery time at $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$	t_{rr}	150	150	250	300	500	ns
*Maximum junction capacitance at 12V, 1MHz	C_J	45	35	25	20	15	pF

Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted
 *JEDEC registered values

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Maximum Forward Current Derating Curve

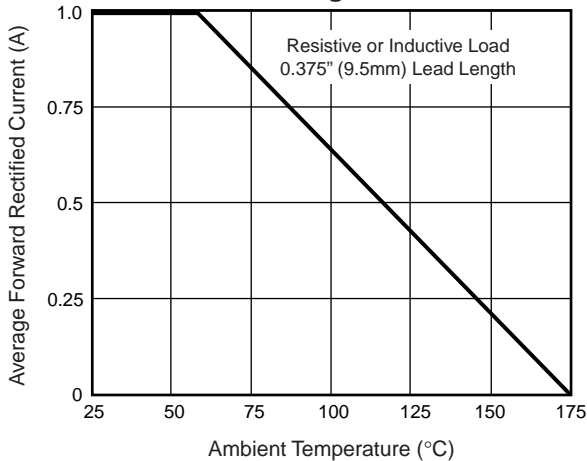


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

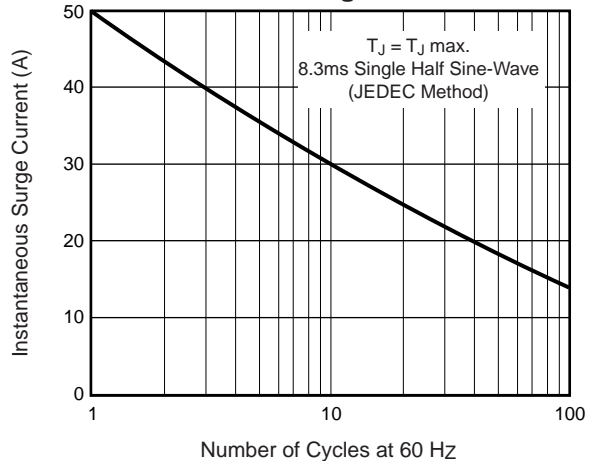


Fig. 3 – Typical Instantaneous Forward Characteristics

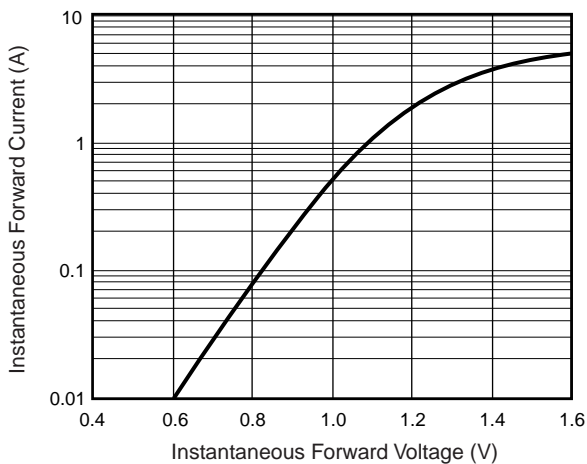


Fig. 4 – Typical Reverse Leakage Characteristics

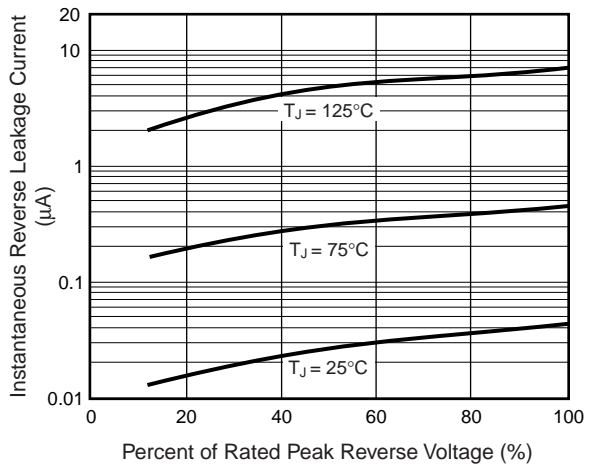


Fig. 5 – Typical Junction Capacitance

