



DESD33A332KN7A

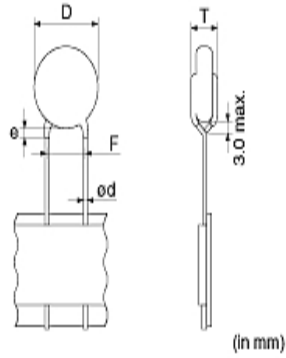

Appearance & Shape

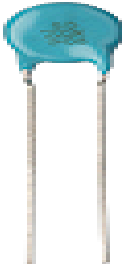

References

| Packaging | Specifications | Standard Packing Quantity |
|-----------|----------------|---------------------------|
| A | Ammo Pack | 500 |

| Mass (typ.) | |
|-------------|-------|
| 1 piece | 0.96g |

Notices

Please use alternative

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

DESD33A332KN7A



Specifications

| | |
|--|------------------------|
| L size or Outer diameter D | 14.0mm max. |
| T size | 4.5mm max. |
| Lead spacing F | 7.5±1.0mm |
| Lead diameter d | 0.6±0.05mm |
| Paint dripping e | Up to the end of crimp |
| Capacitance | 3300pF ±10% |
| Rated voltage | 1000Vdc |
| Temperature characteristics | D(JIS) |
| Capacitance change rate | +20/-30% |
| Temperature range of temperature characteristics | -25°C to 125°C |
| Operating Temperature Range | -25°C to 125°C |

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.