SMD / SMT Inductors (Coils) SLF12575T-220M4R0-PF

Applications	Commercial Grade	
Feature	Wire Wound Shield Magnetic Shield Ferrite Core Ferrite Core	- File
Series Type	SLF	
Status	Production	
Brand	TDK	

Size		
Length(L)	12.50mm ±0.30mm	
Width(W)	12.50mm ±0.30mm	
Thickness Height	7.50mm ±0.35mm	
Recommended Land Pattern (A)	2.60mm Nom.	
Recommended Land Pattern (B)	8.50mm Nom.	
Recommended Land Pattern (C)	3.20mm Nom.	


Electrical Characteristics				
Inductance	22µH ±20% at 1kHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	4A (10% Down)			
Rated Current (Temperature Rise) [Typ.]	4A (40°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	26.3mΩ			
DC Resistance [Max.]	31.6mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
Coldering Mathed	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [330mm Reel]		
Package Quantity	500pcs		
Weight	3.6g		

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

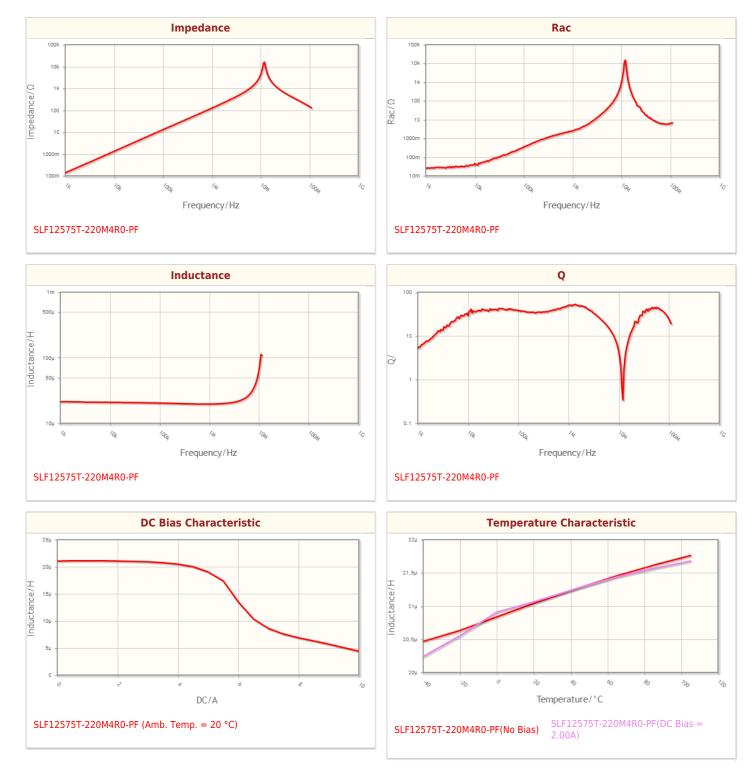

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

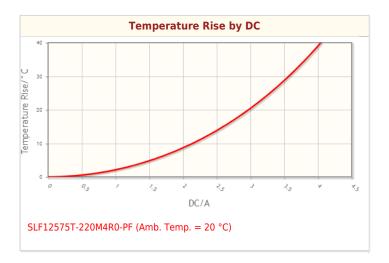

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

Associated Images

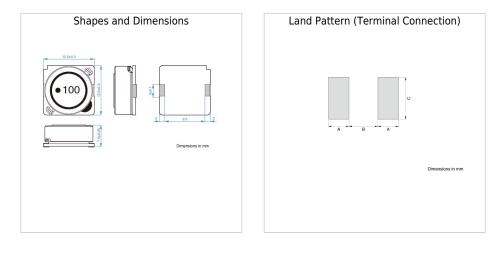

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.