SMD / SMT Inductors (Coils) NL453232T-1R2J-PF

Applications	Commercial Grade	
Feature	No Directivity No Directivity	
	Wire Wound Wire Wound	
	Ferrite Core	
Series Type	NL453232	A70J
Status	EOL announced	AI
	Recommended Alternate Part No. : <u>NLV32T-1R2J-EF</u> (Interchangeability is not	
	guaranteed.)	
	Discontinue Issue Date : May.28, 2020	•
	Last Purchase Order Date : Mar.31, 2022	
	Last Shipment Date : Sep.30, 2022	
Brand	трк	

Size		
Length(L)	4.50mm ±0.30mm	
Width(W)	3.20mm ±0.20mm	
Thickness Height	3.20mm ±0.20mm	
Recommended Land Pattern (A)	1.50mm Nom.	
Recommended Land Pattern (B)	3.00mm Nom.	
Recommended Land Pattern (C)	2.80mm Nom.	


Electrical Characteristics				
Inductance	1.2µH ±5% at 7.96MHz			
Rated Current	430mA			
DC Resistance [Typ.]				
DC Resistance [Max.]	550mΩ			
Self Resonant Frequency [Min.]	80MHz			
Self Resonant Frequency [Typ.]				
Q [Min.]	50 at 7.96MHz			
Q [Typ.]				

o	ther
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85°C
	Wave (Flow)
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	500pcs
Weight are for reference only and show exemplary products.	0.18g

+ This PDF document was created based on the data listed on the TDK Corporation website

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

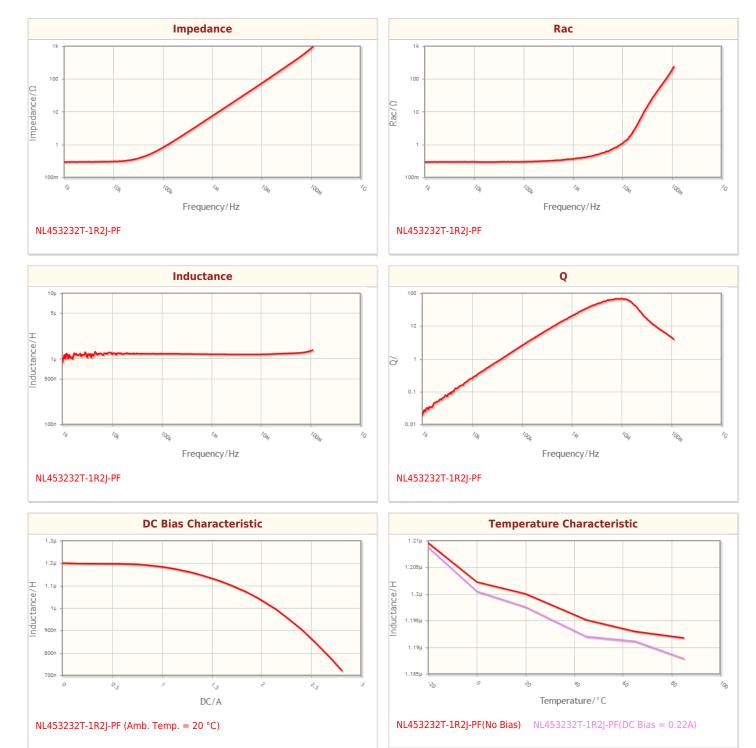


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Associated Images

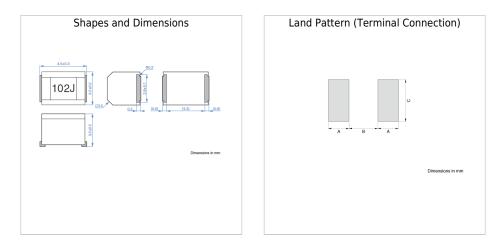

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.