SMD / SMT Inductors (Coils) NLCV32T-100K-EF

Applications	Commercial Grade
Feature	No Directivity Wire Wound Ferrite Core
Series Type	NLCV32-EF
Status	Production
Brand	ток



Size		
Length(L)	3.20mm ±0.20mm	
Width(W)	2.50mm ±0.20mm	
Thickness Height	2.20mm ±0.20mm	
Recommended Land Pattern (A)	1.20mm Nom.	
Recommended Land Pattern (B)	2.00mm Nom.	
Recommended Land Pattern (C)	2.00mm Nom.	

Electrical Characteristics		
Inductance	10µH ±10% at 2.52MHz	
Rated Current	450mA	
DC Resistance [Typ.]	360mΩ	
DC Resistance [Max.]	468mΩ	
Self Resonant Frequency [Min.]	30MHz	
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]	15 at 2.52MHz	


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.05g	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

 $! \ \mbox{All specifications} \ \mbox{are subject to change without notice}.$

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

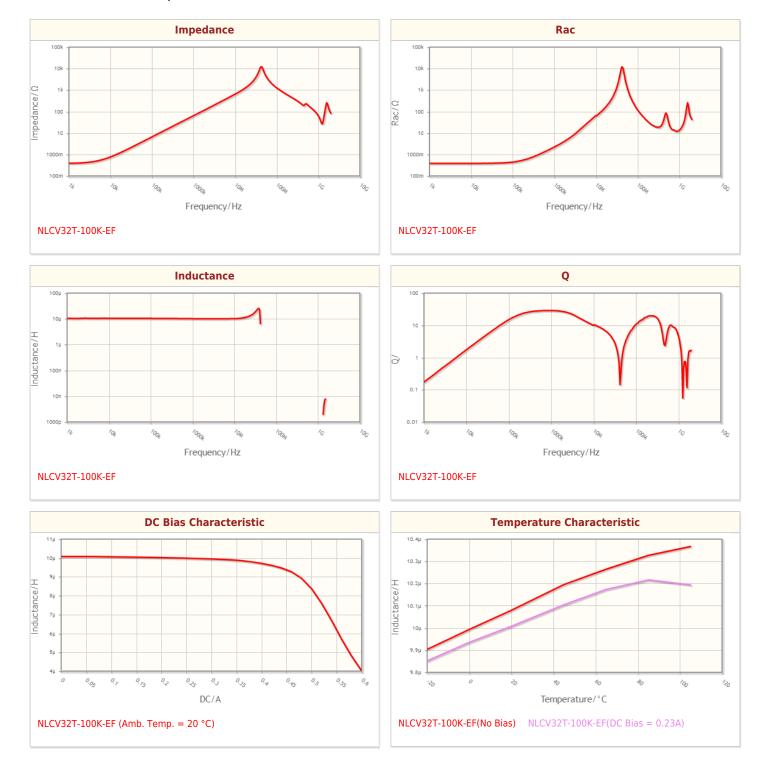


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

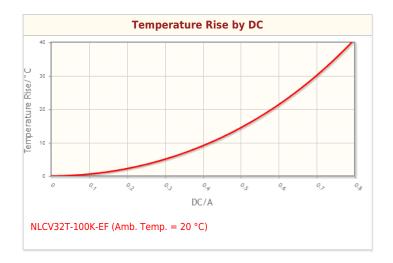


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images

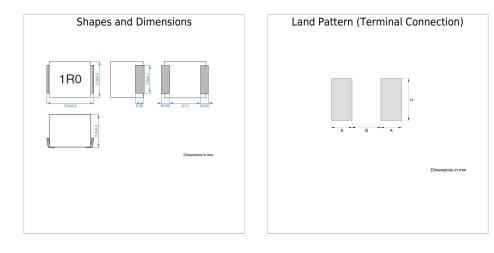

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.