SMD / SMT Inductors (Coils) MLG1005S22NJT000

Applications	Commercial Grade	
Feature	Multilayer Non-Mag Core Non-Magnetic Core (Dielectric Ceramic)	
Series Type	MLG	
Status	Production	
Brand	ток	

	Size
Length(L)	1.00mm ±0.05mm
Width(W)	0.50mm ±0.05mm
Thickness Height	0.50mm ±0.05mm
Recommended Land Pattern (A)	0.50mm Nom.
Recommended Land Pattern (B)	0.40mm Nom.
Recommended Land Pattern (C)	0.50mm Nom.

Electrical Characteristics		
Inductance	22nH ±5% at 100MHz	
Rated Current	350mA	
DC Resistance [Typ.]	460mΩ	
DC Resistance [Max.]	700mΩ	
Self Resonant Frequency [Min.]	1.7GHz	
Self Resonant Frequency [Typ.]	2.2GHz	
Q [Min.]	8 at 100MHz	
Q [Typ.]	11 at 100MHz	


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldering Mathed	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]	
Package Quantity	10000pcs	
Weight	0.001g	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

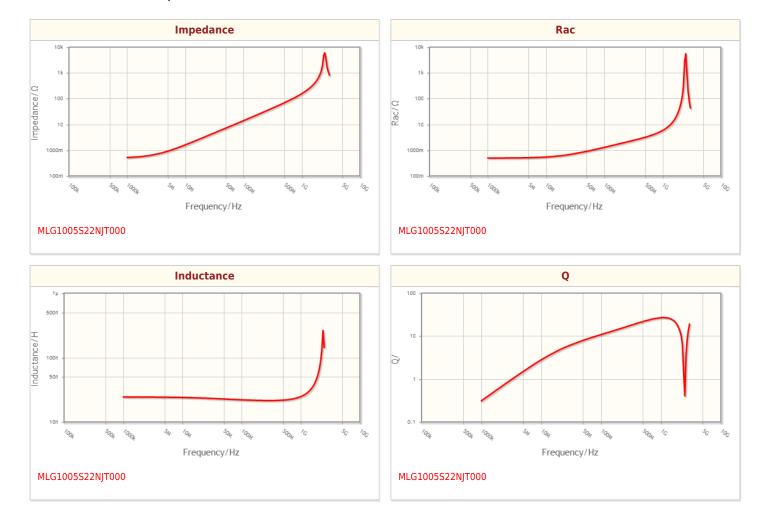


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images

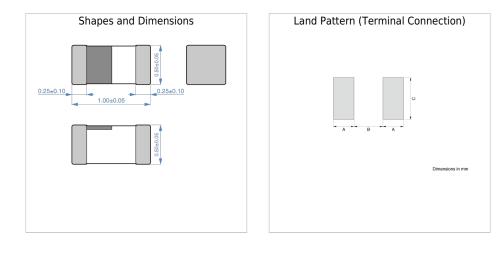

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.