

NL565050T-562J-PF

RoHS Reach

Applications	Commercial Grade	
	No Directivity No Directivity	
Feature	Wire Wound Wire Wound	
	Ferrite Core Ferrite Core	
Series Type	NL565050	
	↑ Obsolete	
Status	Recommended Alternate Part No. : None	
	Discontinue Issue Date : May.21, 2015	
	Last Purchase Order Date : Dec.22, 2016	
	Last Shipment Date : Jun.30, 2017	
Brand	TDK	



	Size	
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics			
Inductance	5.6mH ±5% at 252kHz		
Rated Current	33mA		
DC Resistance [Typ.]			
DC Resistance [Max.]	85Ω		
Self Resonant Frequency [Min.]	800kHz		
Self Resonant Frequency [Typ.]			
Q [Min.]	30 at 252kHz		
Q [Typ.]			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85°C		
	Wave (Flow)		
Soldering Method	Reflow		
	Iron Soldering		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [180mm Reel]		
Package Quantity	400pcs		
Weight	0.38g		


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.




Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

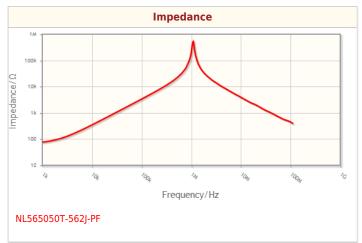


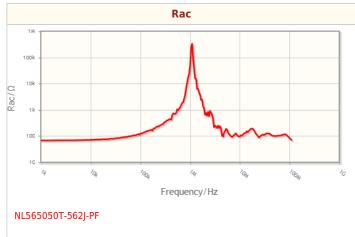

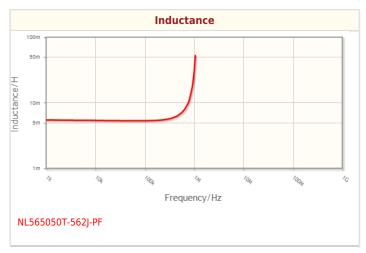



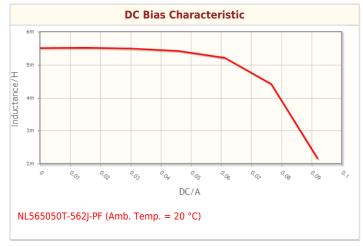

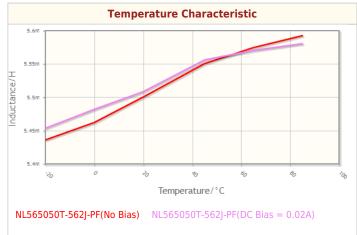


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

565050T-562I-PF RoHS Reach

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.