RoHS Reach Halogen Free Pb Free



MLF1608E100JT000

Applications	Commercial Grade
Feature	Multilayer Multilayer Shield Magnetic Shield
	Ferrite Core Ferrite Core
Series Type	MLF
Status	Production
Brand	TDK



	Size
Length(L)	1.60mm ±0.15mm
Width(W)	0.80mm ±0.15mm
Thickness Height	0.80mm ±0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.

Electrical Characteristics			
Inductance	10μH ±5% at 2MHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	10mA		
Rated Current (Temperature Rise) [Typ.]			
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	1Ω		
DC Resistance [Max.]	1.7Ω		
Self Resonant Frequency [Min.]	30MHz		
Self Resonant Frequency [Typ.]	50MHz		
Q [Min.]	30 at 2MHz		
Q [Typ.]	55 at 2MHz		


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldaring Mathad	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Weight	0.004g	


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

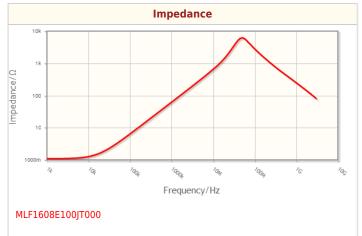

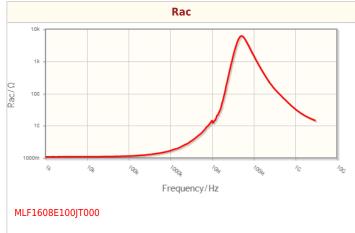

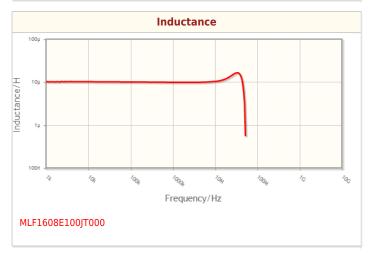

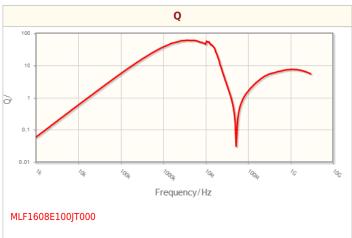

[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free



Associated Images





 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.