SMD / SMT Inductors (Coils) VLCF5028T-101MR33-2

Applications	Commercial Grade
Feature	Wire Wound Shield Magnetic Shield Ferrite Core
Series Type	VLCF
Status	Production
Brand	ток



Size		
5.00mm ±0.20mm		
5.00mm ±0.20mm		
2.80mm Max.		
2.10mm Nom.		
1.30mm Nom.		
3.00mm Nom.		
4.90mm Nom.		


Electrical Characteristics		
Inductance	100µH ±20% at 100kHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	330mA (30% Down)	
Rated Current (Temperature Rise) [Typ.]	770mA (40°C Rise)	
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	580mΩ	
DC Resistance [Max.]	670mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
Soldering Method	Reflow		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [180mm Reel]		
Package Quantity	500pcs		
Weight	0.258g		

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

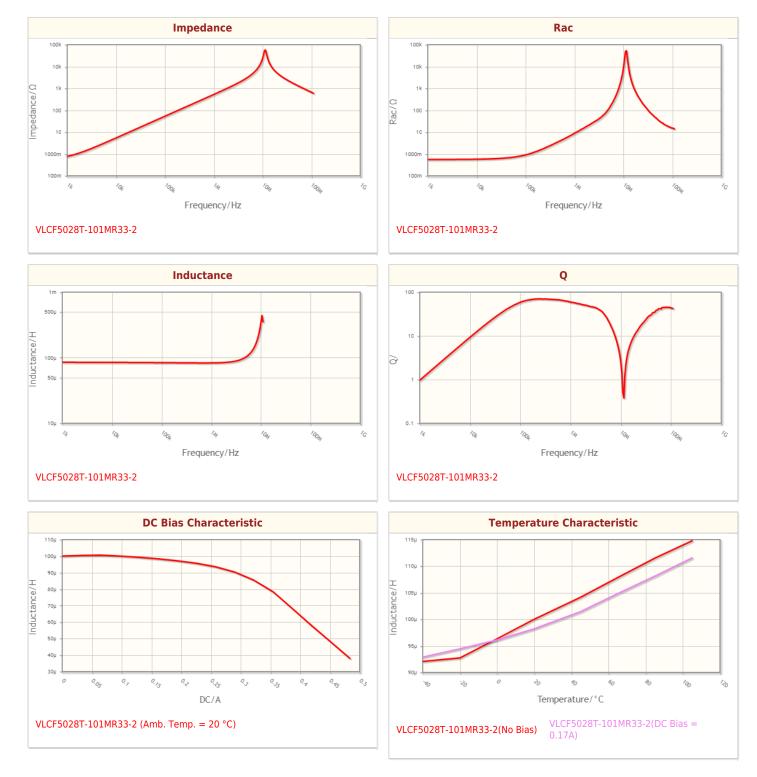


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

RoHS Reach Halogen Free Pb Free

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

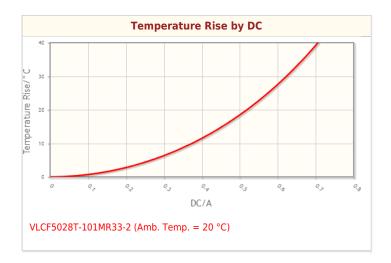


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

RoHS Reach Halogen Free Pb Free

Associated Images

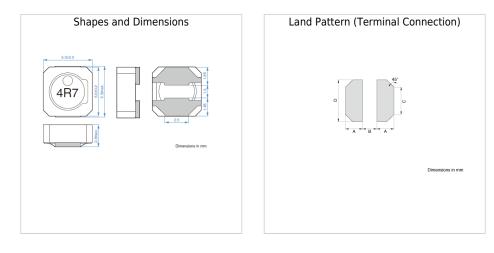

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.