

VLF302510MT-1R5N-CA RoHS Reach Halogen Free Pb Free

| Applications | Automotive Grade | | |
|---------------|---|--|--|
| | Wire Wound | | |
| Feature | Shield Magnetic Shield | | |
| | Ferrite Core Ferrite Core | | |
| Series Type | VLF-M | | |
| Status | ↑ Obsolete | | |
| | Recommended Alternate Part No. : <u>VLS5045EX-1R5N-H</u> (Interchangeability is not | | |
| | guaranteed.) | | |
| | Discontinue Issue Date : May.18, 2017 | | |
| | Last Purchase Order Date : Mar.31, 2021 | | |
| | Last Shipment Date : Sep.30, 2021 | | |
| Brand | TDK | | |



| | Size | |
|------------------------------|----------------|--|
| Length(L) | 3.00mm ±0.20mm | |
| Width(W) | 2.50mm ±0.20mm | |
| Thickness Height | 1.00mm Max. | |
| Recommended Land Pattern (A) | 0.90mm Nom. | |
| Recommended Land Pattern (B) | 0.80mm Nom. | |
| Recommended Land Pattern (C) | 1.45mm Nom. | |

| Electrical Characteristics | | | | |
|---|--------------------|--|--|--|
| Inductance | 1.5µH ±30% at 1MHz | | | |
| Rated Current (L Change) [Typ.] | 1.65A (30% Down) | | | |
| Rated Current (L Change) [Max.] | 1.49A (30% Down) | | | |
| Rated Current (Temperature Rise) [Typ.] | 1.65A (40°C Rise) | | | |
| Rated Current (Temperature Rise) [Max.] | | | | |
| DC Resistance [Typ.] | 55mΩ | | | |
| DC Resistance [Max.] | 66mΩ | | | |
| Self Resonant Frequency [Min.] | | | | |
| Self Resonant Frequency [Typ.] | | | | |
| Q [Min.] | | | | |
| Q [Typ.] | | | | |

| Other | | | |
|---|---------------------------------------|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 105°C | | |
| Soldering Method | Reflow | | |
| AEC-Q200 | NO | | |
| Packing | Embossed (Plastic)Taping [180mm Reel] | | |

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

 $^{! \ \}mbox{All specifications}$ are subject to change without notice.




2 of 5 Creation Date : October 07, 2022 (GMT)


RoHS Reach Halogen Free Pb Free


| Package Quantity | 2000pcs |
|------------------|---------|
| Weight | 0.026g |


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

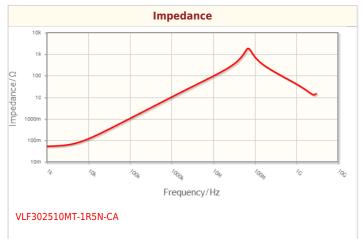


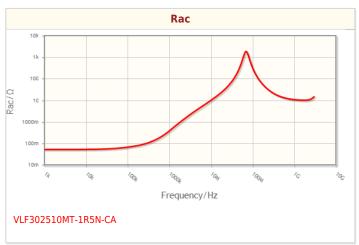

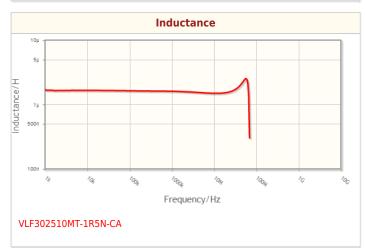

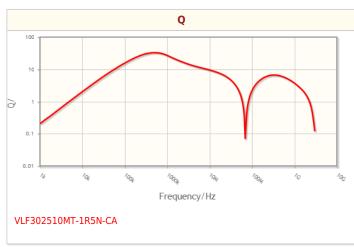

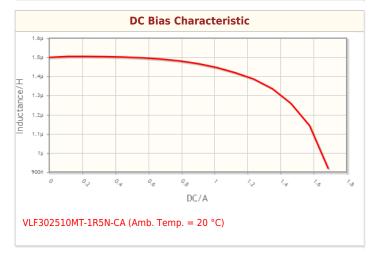

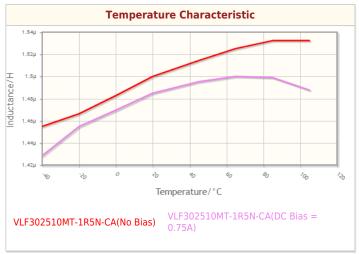


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

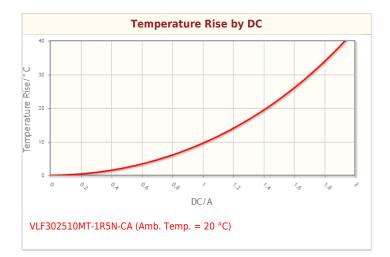


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

 $^{! \ \}mbox{All specifications}$ are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

 $^{! \ \}mbox{All specifications}$ are subject to change without notice.