RoHS Reach Halogen Free Pb Free



VLF302512MT-6R8M

| Applications | Commercial Grade | | |
|---------------|--|--|--|
| | Wire Wound | | |
| Feature | Shield Magnetic Shield | | |
| | Ferrite Core Ferrite Core | | |
| Series Type | VLF-M | | |
| Status | ↑ Obsolete | | |
| | Recommended Alternate Part No. : <u>VLS3012HBX-6R8M-N</u> (Interchangeability is not | | |
| | guaranteed.) | | |
| | Discontinue Issue Date : May.18, 2017 | | |
| | Last Purchase Order Date : Mar.31, 2021 | | |
| | Last Shipment Date : Sep.30, 2021 | | |
| Brand | TDK | | |




| Size | | |
|------------------------------|----------------|--|
| Length(L) | 3.00mm ±0.20mm | |
| Width(W) | 2.50mm ±0.20mm | |
| Thickness Height | 1.20mm Max. | |
| Recommended Land Pattern (A) | 0.90mm Nom. | |
| Recommended Land Pattern (B) | 0.80mm Nom. | |
| Recommended Land Pattern (C) | 1.45mm Nom. | |


| Electrical Characteristics | | | | |
|---|--------------------|--|--|--|
| Inductance | 6.8μH ±20% at 1MHz | | | |
| Rated Current (L Change) [Typ.] | 840mA (30% Down) | | | |
| Rated Current (L Change) [Max.] | 780mA (30% Down) | | | |
| Rated Current (Temperature Rise) [Typ.] | 1.21A (40°C Rise) | | | |
| Rated Current (Temperature Rise) [Max.] | | | | |
| DC Resistance [Typ.] | 162mΩ | | | |
| DC Resistance [Max.] | 194mΩ | | | |
| Self Resonant Frequency [Min.] | | | | |
| Self Resonant Frequency [Typ.] | | | | |
| Q [Min.] | | | | |
| Q [Typ.] | | | | |


| Other | | | |
|---|---------------------------------------|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 105°C | | |
| Soldering Method | Reflow | | |
| AEC-Q200 | NO | | |
| Packing | Embossed (Plastic)Taping [180mm Reel] | | |
| Images are for reference only and show exemplary products. Inis PDF duantity This PDF duality | 2000pcs | | |
| weight | 0.033g | | |


RoHS Reach Halogen Free Pb Free


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

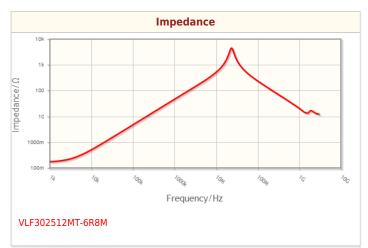


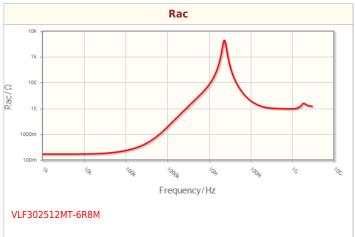

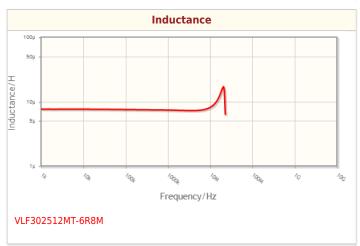

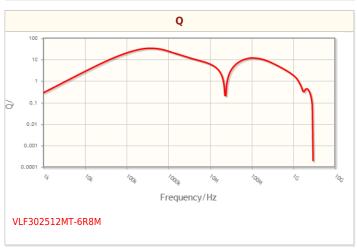

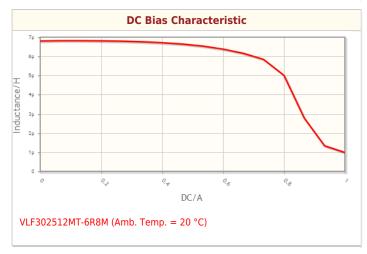

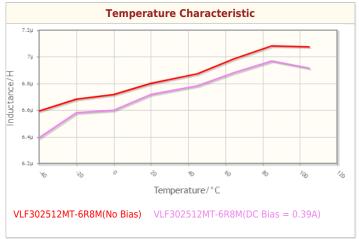

[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

VLF302512MT-6R8M

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

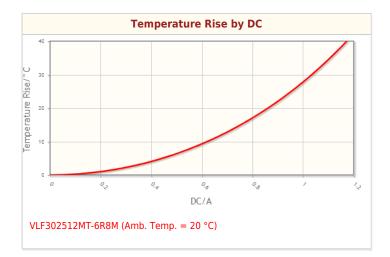


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.