

RoHS Reach Halogen Free Pb Free

Applications	Commercial Grade
Feature	Multilayer Shield Magnetic Shield
- Cuture	Ferrite Core Ferrite Core
Series Type	MLF
Status	Production
Brand	TDK



Size	
Length(L)	1.00mm ±0.05mm
Width(W)	0.50mm ±0.05mm
Thickness Height	0.50mm ±0.05mm
Recommended Land Pattern (A)	0.50mm Nom.
Recommended Land Pattern (B)	0.40mm Nom.
Recommended Land Pattern (C)	0.50mm Nom.

Electrical Characteristics		
Inductance	150nH ±5% at 25MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	180mA	
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	390mΩ	
DC Resistance [Max.]	630mΩ	
Self Resonant Frequency [Min.]	350MHz	
Self Resonant Frequency [Typ.]	650MHz	
Q [Min.]	15 at 25MHz	
Q [Typ.]	30 at 25MHz	

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldaring Mathad	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	10000pcs	
Weight	0.0012g	


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.


RoHS Reach Halogen Free Pb Free

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

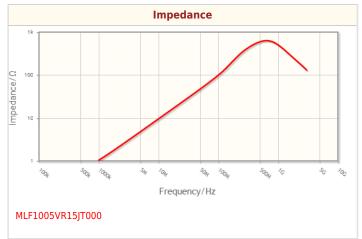

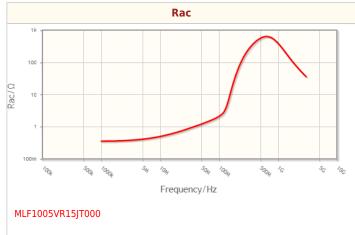

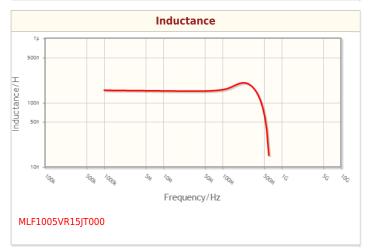

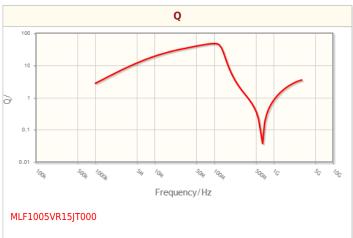


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images





 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.