RoHS Reach

NLC565050T-271K-PF

Applications	Commercial Grade		
	No Directivity No Directivity		
Feature	Wire Wound		
	Ferrite Core		
Series Type	NLC565050		
Status	⚠ Obsolete		
	Recommended Alternate Part No. : None		
	Discontinue Issue Date : May.21, 2015		
	Last Purchase Order Date : Dec.22, 2016		
	Last Shipment Date : Jun.30, 2017		
Brand	TDK		



	Size	
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics		
Inductance	270μH ±10% at 796kHz	
Rated Current	155mA	
DC Resistance [Typ.]		
DC Resistance [Max.]	4.2Ω	
Self Resonant Frequency [Min.]	3.6MHz	
Self Resonant Frequency [Typ.]		
Q [Min.]	20 at 796kHz	
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	400pcs	
Weight	0.38g	


 $^{!\ \}mbox{lmages}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.





Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

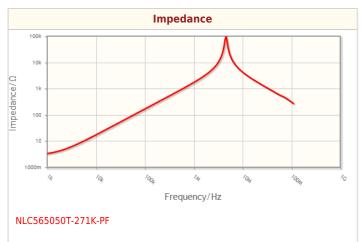


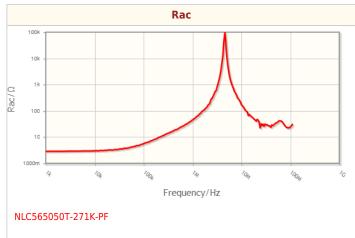

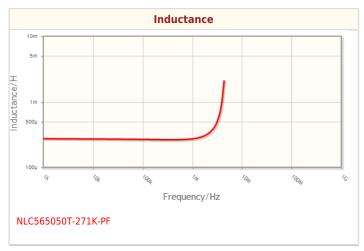

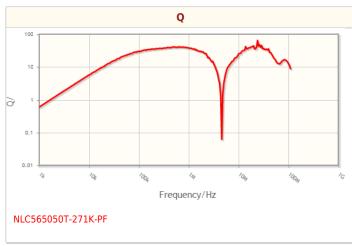

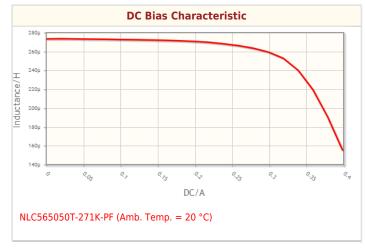

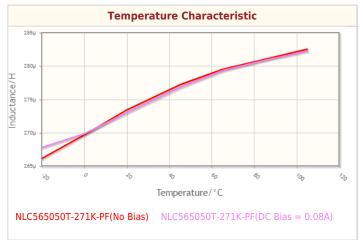

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.

SMD / SMT Inductors (Coils)

&TDK

RoHS Reach

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.