RoHS Reach Halogen Free Pb Free

Applications	Automotive Grade
Feature	AEC-Q200 AEC-Q200 Multilayer Multilayer Shield Magnetic Shield Ferrite Core Ferrite Core
Series Type	MLF
Status	Production
Brand	TDK



Size		
Length(L)	1.60mm ±0.15mm	
Width(W)	0.80mm ±0.15mm	
Thickness Height	0.80mm ±0.15mm	
Recommended Land Pattern (A)	0.60mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	0.80mm Nom.	

Electrical Characteristics		
Inductance	5.6μH ±5% at 4MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	15mA	
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	550mΩ	
DC Resistance [Max.]	1.1Ω	
Self Resonant Frequency [Min.]	45MHz	
Self Resonant Frequency [Typ.]	70MHz	
Q [Min.]	35 at 4MHz	
Q [Typ.]	60 at 4MHz	

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Caldarina Mathad	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	YES	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Weight	0.004g	


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.


RoHS Reach Halogen Free Pb Free

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

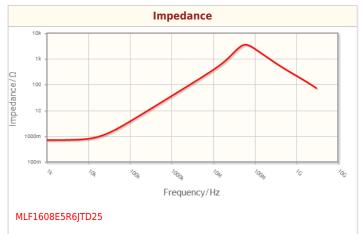

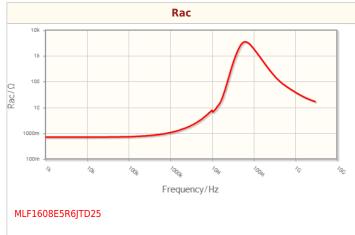

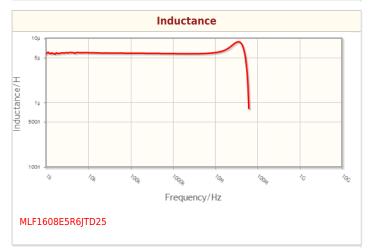

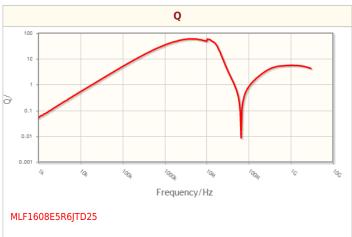



[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

Associated Images





 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.