

Applications



Commercial Grade

Feature

Wire Wound

Wire Wound

Shield

Magnetic Shield

Ferrite Core

Ferrite Core

Series | Type

VLF



Obsolete

Recommended Alternate Part No. : [CLF10040T-4R7N-D](#) (Interchangeability is not guaranteed.)

Status

Discontinue Issue Date : May.18, 2017

Last Purchase Order Date : Mar.29, 2019

Last Shipment Date : Sep.30, 2019

Brand

TDK



Size

Length(L)	10.00mm Nom.
Width(W)	9.70mm Nom.
Thickness Height	4.00mm Max.
Recommended Land Pattern (A)	1.70mm Nom.
Recommended Land Pattern (B)	7.30mm Nom.
Recommended Land Pattern (C)	3.60mm Nom.

Electrical Characteristics

Inductance	4.7μH ±30% at 100kHz
Rated Current (L Change) [Typ.]	
Rated Current (L Change) [Max.]	5.4A (30% Down)
Rated Current (Temperature Rise) [Typ.]	5.6A (40°C Rise)
Rated Current (Temperature Rise) [Max.]	
DC Resistance [Typ.]	12.7mΩ
DC Resistance [Max.]	15.3mΩ
Self Resonant Frequency [Min.]	
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	

Other







Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C
Soldering Method	Reflow
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [330mm Reel]
Package Quantity	500pcs
Weight	1.27g

Images are for reference only and show exemplary products.


This PDF document was created based on the data listed on the TDK Corporation website.

All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

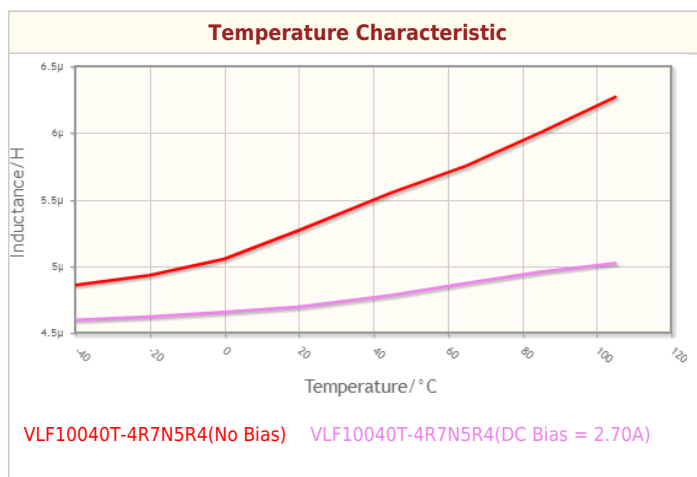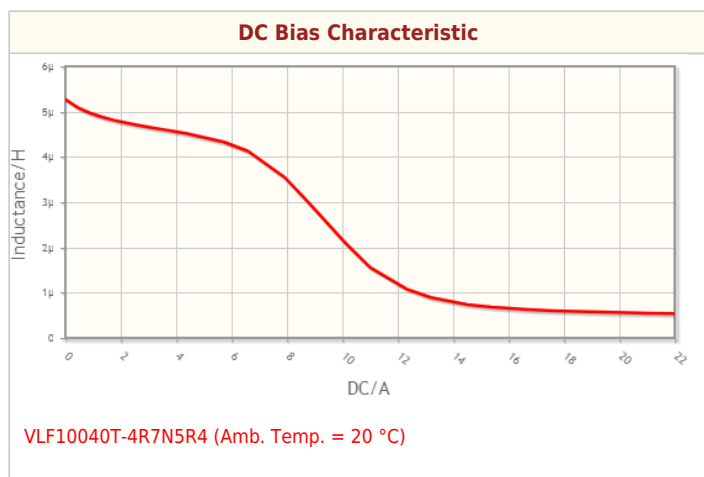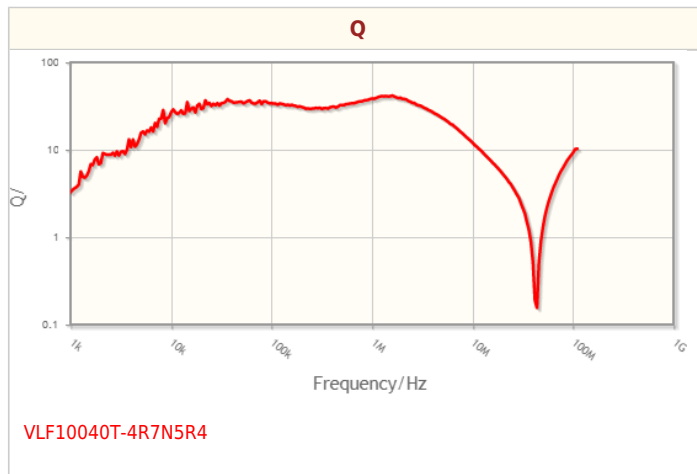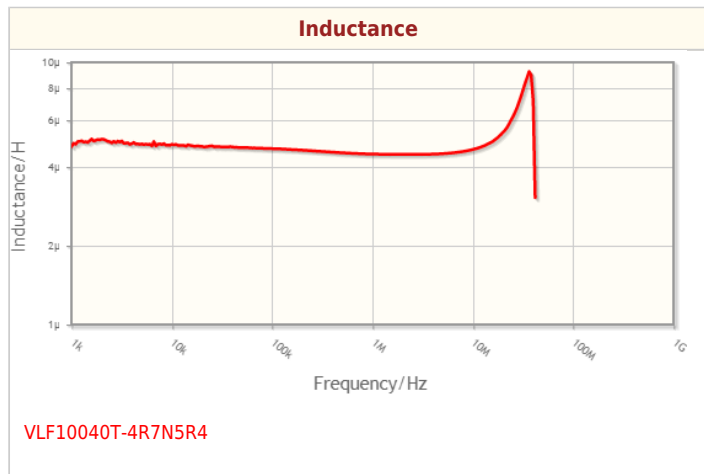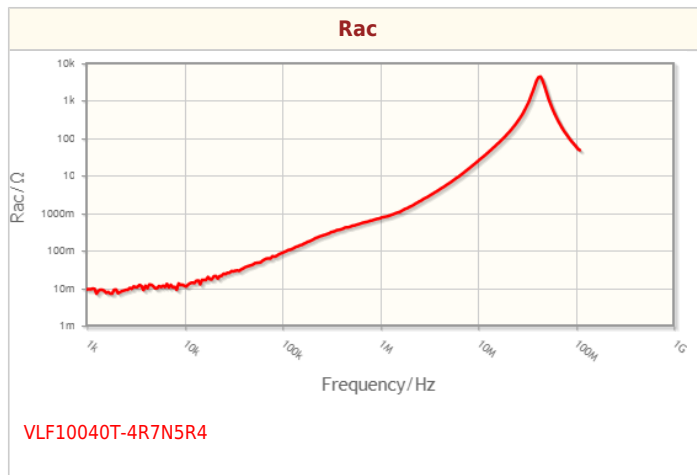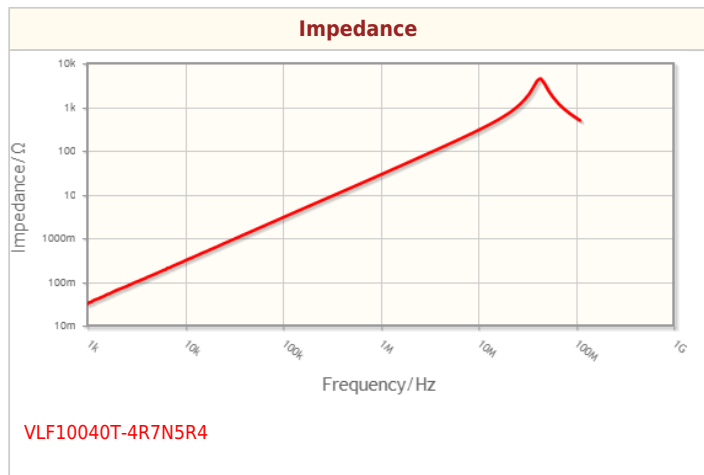

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

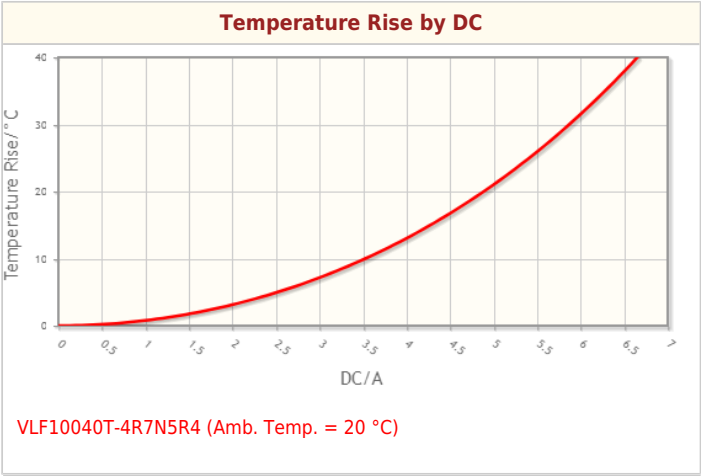

! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.

Associated Images

