SMD / SMT Inductors (Coils) NLC565050T-391K-PF

Applications	Commercial Grade	
	No Directivity No Directivity	•
Feature	Wire Wound Wire Wound	
	Ferrite Core	
Series Type	NLC565050	180
	A Obsolete	1
	Recommended Alternate Part No. : None	
Status	Discontinue Issue Date : May.21, 2015	21
	Last Purchase Order Date : Dec.22, 2016	
	Last Shipment Date : Jun.30, 2017	
Brand	ток	

Size		
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics				
Inductance	390μH ±10% at 796kHz			
Rated Current	130mA			
DC Resistance [Typ.]				
DC Resistance [Max.]	5.8Ω			
Self Resonant Frequency [Min.]	2.9MHz			
Self Resonant Frequency [Typ.]				
Q [Min.]	20 at 796kHz			
Q [Typ.]				


Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
	Wave (Flow)		
Soldering Method	Reflow		
	Iron Soldering		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [180mm Reel]		
Package Quantity	400pcs		
Weight	0.38g		

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

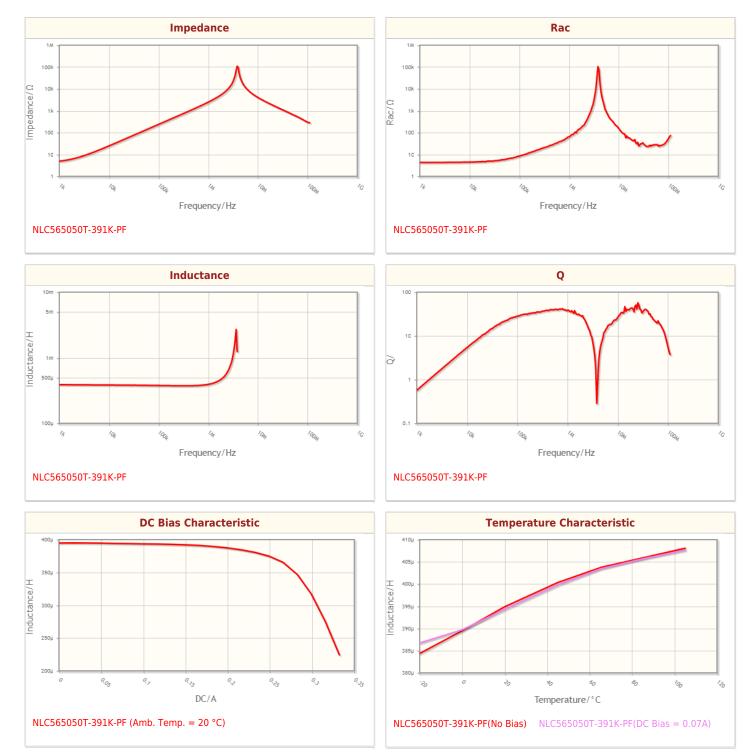


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Associated Images

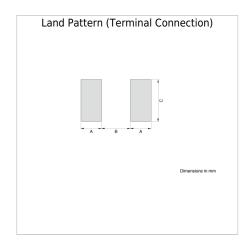

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

 $! \ \mbox{All specifications} \ \mbox{are subject to change without notice.}$