&TDK SMD / SMT Inductors (Coils) MHQ0402P0N7BT000

Applications	Commercial Grade	
	Multilayer Multilayer	
Feature	Non-Mag Core Non-Magnetic Core (Dielectric Ceramic)	
	Super High Q Super High Q	
Series Type	MHQ-P	
Status	A Obsolete	
	Recommended Alternate Part No. : <u>MHQ0402PSA0N7BT000</u> (Interchangeability is not	
	guaranteed.)	
	Discontinue Issue Date : Nov.29, 2019	
	Last Purchase Order Date : Dec.31, 2020	
	Last Shipment Date : Mar.31, 2021	
Brand	трк	

Size		
Length(L)	0.44mm ±0.02mm	
Width(W)	0.24mm ±0.02mm	
Thickness Height	0.24mm ±0.02mm	
Recommended Land Pattern (A)	0.15mm to 0.20mm	
Recommended Land Pattern (B)	0.20mm Nom.	
Recommended Land Pattern (C)	0.18mm to 0.20mm	


Electrical Characteristics			
Inductance	0.7nH ±0.1nH at 500MHz		
Rated Current	320mA		
DC Resistance [Typ.]	90mΩ		
DC Resistance [Max.]	200mΩ		
Self Resonant Frequency [Min.]	10GHz		
Self Resonant Frequency [Typ.]	18.8GHz		
Q [Min.]			
Q [Typ.]	12 at 500MHz		


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Soldering Method	Reflow	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]	
Package Quantity	20000pcs	
Weight	0.00011g	


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

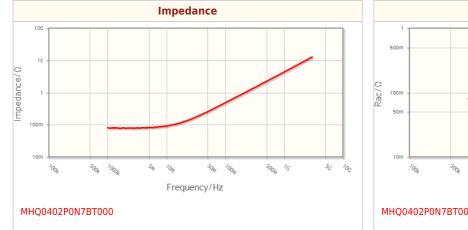

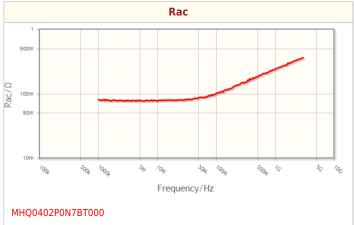

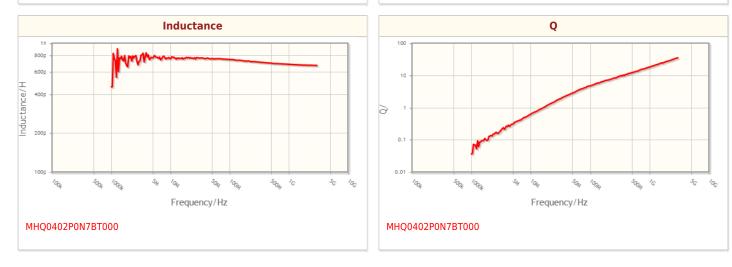


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Associated Images

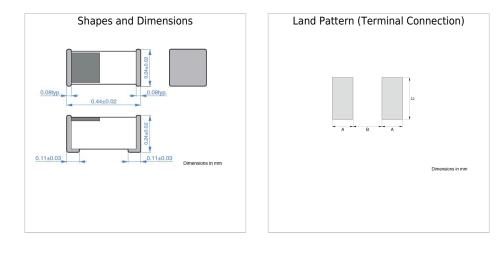

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.