

VLS3015ET-100M

| Applications  | Commercial Grade  |  |
|---------------|---|--|
| Feature       | Wire Wound Shield Magnetic Shield Ferrite Core  |  |
| Series   Type | VLS-E   |  |
| Status        | Production (Not Recommended for New Design)  Recommended Alternate Part No. : <u>VLS3015CX-100M-1</u> (Interchangeability is not guaranteed.) |  |
| Brand         | TDK   |  |



| Size                         |                |  |
|------------------------------|----------------|--|
| Length(L)                    | 3.00mm ±0.10mm |  |
| Width(W)                     | 3.00mm ±0.10mm |  |
| Thickness   Height           | 1.50mm Max.    |  |
| Recommended Land Pattern (A) | 1.00mm Nom.    |  |
| Recommended Land Pattern (B) | 1.00mm Nom.    |  |
| Recommended Land Pattern (C) | 3.00mm Nom.    |  |


|   | Floating I Champatonistics |  |  |
|---|----------------------------|--|--|
| Electrical Characteristics              |                            |  |  |
| Inductance                              | 10μH ±20% at 1MHz          |  |  |
| Rated Current (L Change) [Typ.]         | 780mA (30% Down)           |  |  |
| Rated Current (L Change) [Max.]         | 700mA (30% Down)           |  |  |
| Rated Current (Temperature Rise) [Typ.] | 940mA (40°C Rise)          |  |  |
| Rated Current (Temperature Rise) [Max.] |                            |  |  |
| DC Resistance [Typ.]                    | 240mΩ                      |  |  |
| DC Resistance [Max.]                    | 288mΩ                      |  |  |
| Self Resonant Frequency [Min.]          |                            |  |  |
| Self Resonant Frequency [Typ.]          |                            |  |  |
| Q [Min.]                                |                            |  |  |
| Q [Typ.]                                |                            |  |  |


| Other   |                                       |  |  |
|---|---------------------------------------|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 105°C                          |  |  |
| Soldering Method                                  | Reflow                                |  |  |
| AEC-Q200  | NO                                    |  |  |
| Packing   | Embossed (Plastic)Taping [180mm Reel] |  |  |
| Package Quantity                                  | 2000pcs                               |  |  |
| Weight  | 0.052g                                |  |  |


<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


<sup>!</sup> All specifications are subject to change without notice.


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

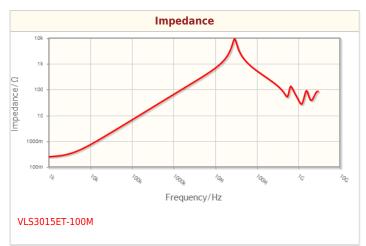


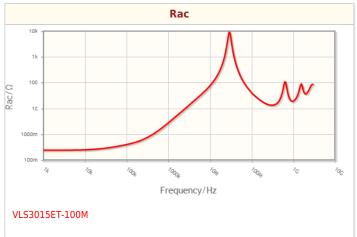

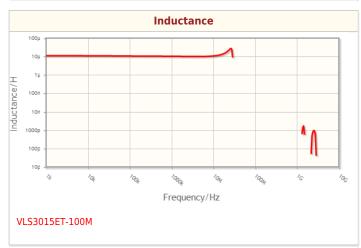

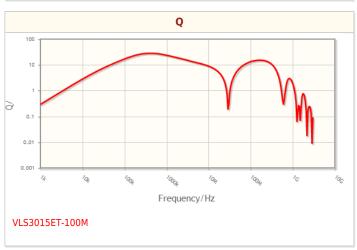

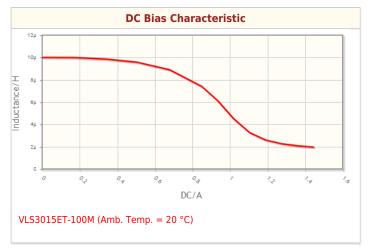

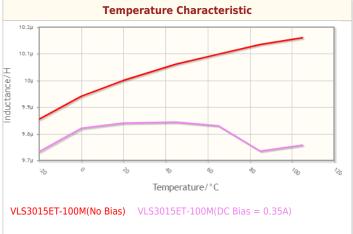


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

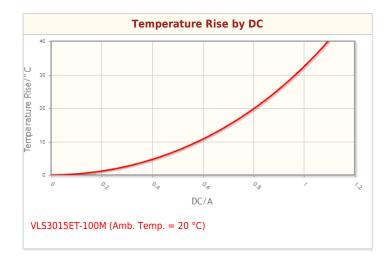


<sup>!</sup> Images are for reference only and show exemplary products.


<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.



## **Associated Images**



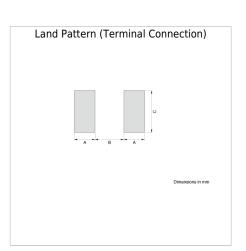

 $<sup>!\ \</sup>mbox{Images}$  are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.