
RoHS Reach Halogen Free Pb Free



MLP2016S1R0MT0S1



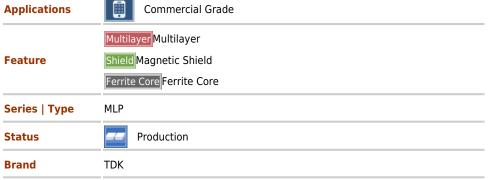

Size	
Length(L)	2.00mm ±0.20mm
Width(W)	1.60mm ±0.20mm
Thickness Height	0.85mm ±0.15mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.60mm Nom.

Electrical Characteristics		
Inductance	1μH ±20% at 2MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]		
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]	1.4A (40°C Rise)	
DC Resistance [Typ.]	90mΩ	
DC Resistance [Max.]	117mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 125°C
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	3000pcs
Weight	0.012g


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

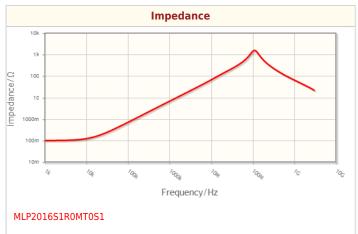

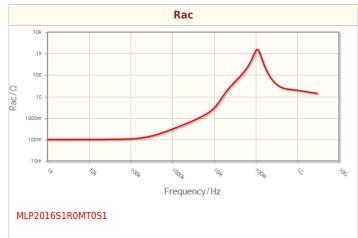

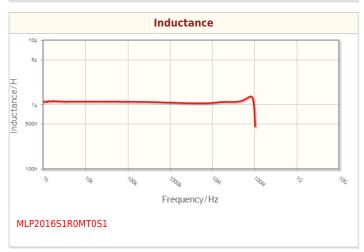

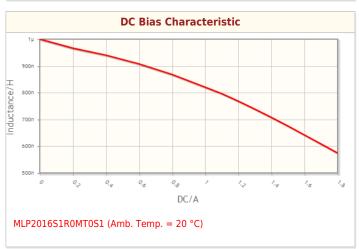

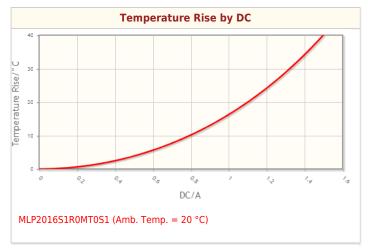


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



Associated Images





 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.