SMD / SMT Inductors (Coils) NLC453232T-220K-PF

Applications	Commercial Grade	
	No Directivity No Directivity	
Feature	Wire Wound Wire Wound	
	Ferrite Core	
Series Type	NLC453232	20
Status	▲ Obsolete	20
	Recommended Alternate Part No. : <u>NLCV32T-220K-EF</u> (Interchangeability is not	
	guaranteed.)	
	Discontinue Issue Date : May.28, 2020	•
	Last Purchase Order Date : Mar.31, 2022	
	Last Shipment Date : Sep.30, 2022	
Brand	ТДК	

Size		
Length(L)	4.50mm ±0.30mm	
Width(W)	3.20mm ±0.20mm	
Thickness Height	3.20mm ±0.20mm	
Recommended Land Pattern (A)	1.50mm Nom.	
Recommended Land Pattern (B)	3.00mm Nom.	
Recommended Land Pattern (C)	2.80mm Nom.	

Electrical Characteristics				
Inductance	22µH ±10% at 2.52MHz			
Rated Current	370mA			
DC Resistance [Typ.]				
DC Resistance [Max.]	900mΩ			
Self Resonant Frequency [Min.]	18MHz			
Self Resonant Frequency [Typ.]				
Q [Min.]	10 at 2.52MHz			
Q [Typ.]				

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	500pcs	
Weight	0.18g	


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

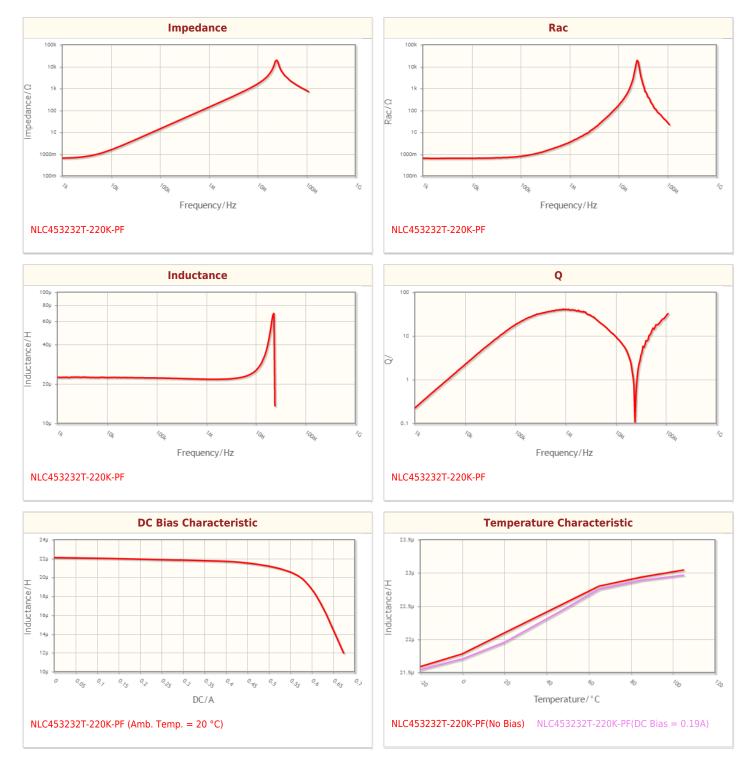


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Associated Images

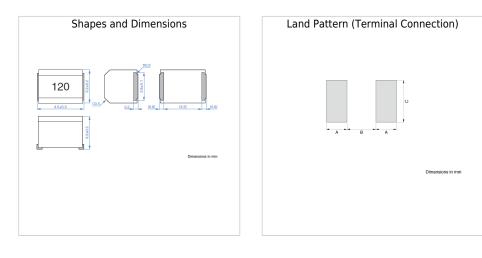

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.