

SMD / SMT Inductors (Coils)

MLK1005SR22JTD25

RoHS Reach Halogen Free Pb Free

Applications	Automotive Grade
	AEC-Q200
	No Directivity
Feature	Multilayer
	Non-Magnetic Core (Dielectric Ceramic)
	High Self Resonant Frequency
Series Type	MLK
	EOL announced
	Recommended Alternate Part No. : MLG1005SR22JTD25 (Interchangeability is not guaranteed.)
Status	Discontinue Issue Date : May.24, 2021
	Last Purchase Order Date : Mar.31, 2026
	Last Shipment Date : Jun.30, 2026
Brand	TDK



Size	
Length(L)	1.00mm ±0.10mm
Width(W)	0.50mm ±0.10mm
Thickness Height	0.50mm ±0.10mm
Recommended Land Pattern (A)	0.50mm Nom.
Recommended Land Pattern (B)	0.40mm Nom.
Recommended Land Pattern (C)	0.50mm Nom.

Electrical Characteristics	
Inductance	220nH ±5% at 100MHz
Rated Current	70mA
DC Resistance [Typ.]	4.54Ω
DC Resistance [Max.]	6.2Ω
Self Resonant Frequency [Min.]	1GHz
Self Resonant Frequency [Typ.]	1.4GHz
Q [Min.]	6 at 100MHz
Q [Typ.]	8 at 100MHz

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Reflow Iron Soldering
AEC-Q200	YES
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]
Package Quantity	10000pcs





! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Weight	0.001g
--------	--------

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

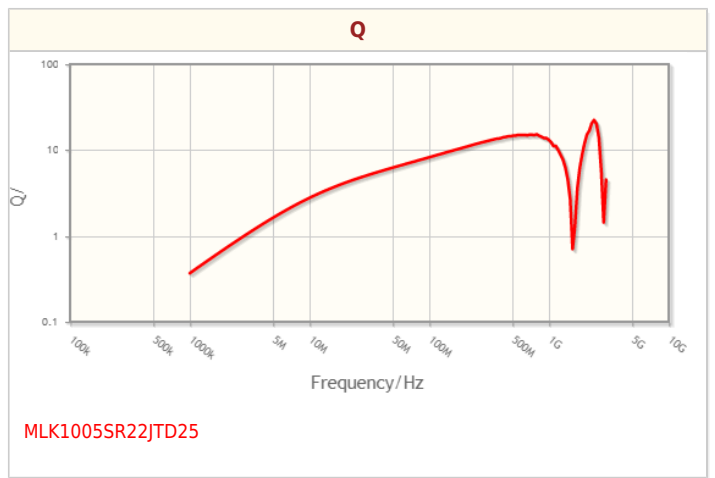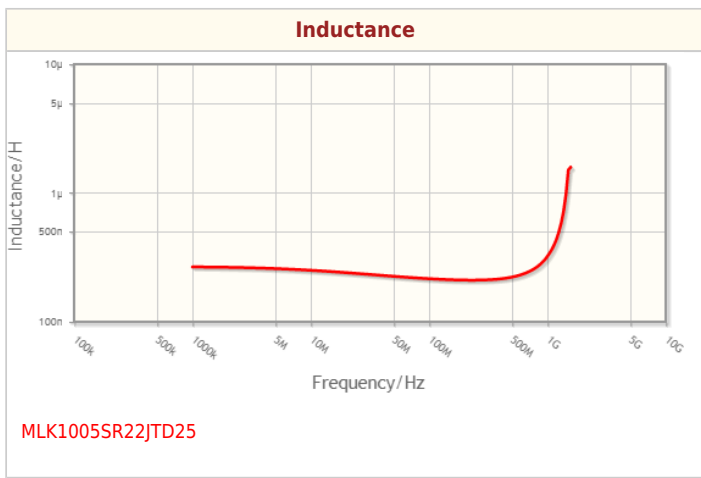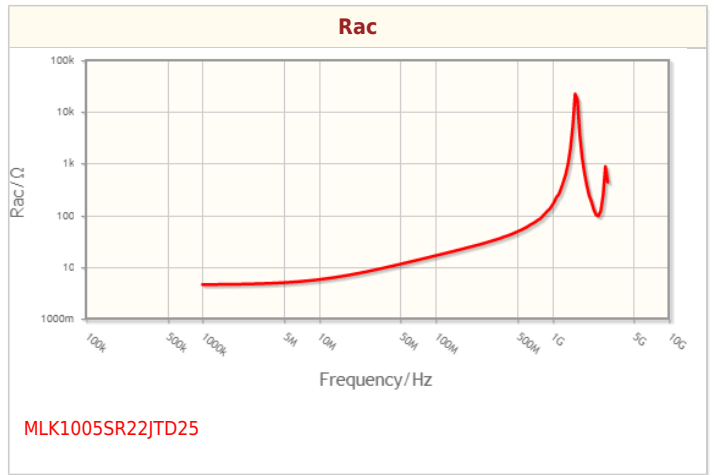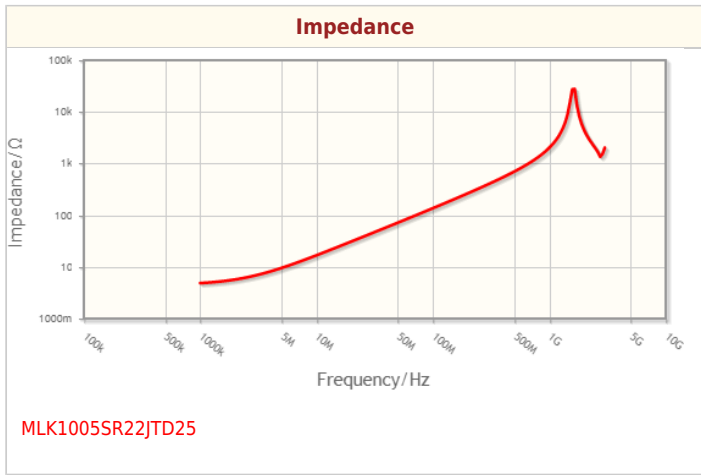

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

