SMD / SMT Inductors (Coils) MLF1608A2R2JT000

Applications	Commercial Grade	
Feature	Multilayer Shield Magnetic Shield Ferrite Core	
Series Type	MLF	
Status	Production	
Brand	тдк	

Size		
Length(L)	1.60mm ±0.15mm	
Width(W)	0.80mm ±0.15mm	
Thickness Height	0.80mm ±0.15mm	
Recommended Land Pattern (A)	0.60mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	0.80mm Nom.	

Electrical Characteristics		
Inductance	$2.2\mu\text{H}$ ±5% at 10MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	30mA	
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	450mΩ	
DC Resistance [Max.]	1Ω	
Self Resonant Frequency [Min.]	80MHz	
Self Resonant Frequency [Typ.]	120MHz	
Q [Min.]	35 at 10MHz	
Q [Typ.]	55 at 10MHz	


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldaring Mathad	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Weight	0.004g	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

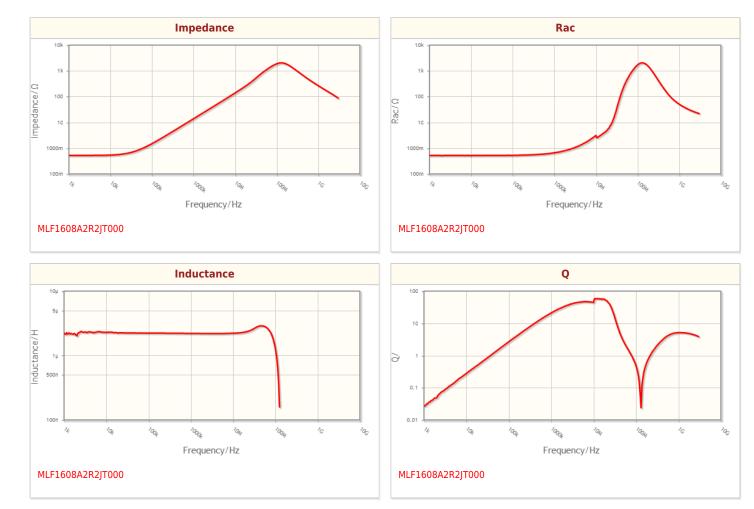


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images

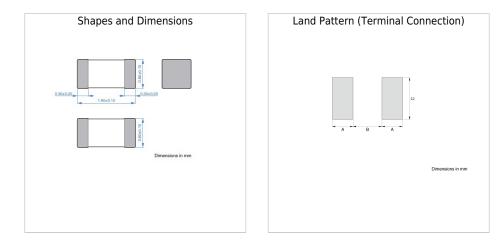

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.