


RF3624E

**314.45 MHz
SAW Filter**



- **Low-loss RF SAW Filter**
- **3 x 3 mm Surface-mount Package**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Simple external impedance matching**

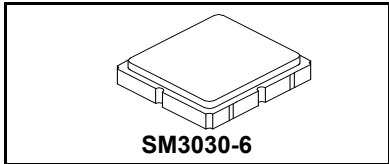

Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	+13	dBm
DC Voltage on any Non-ground Terminal	±0	V
Operating Temperature Range	-40 to +105	°C
Storage Temperature Range in Tape and Reel	-40 to +105	°C

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_C			314.45		MHz
Minimum Insertion Loss, α min	IL					dB
Incl. Loss in Matching Elements		313.92 to 314.98 MHz		1.9	2.7	
Excl. Loss In Matching Elements		313.92 to 314.98 MHz		1.0	1.6	
Pass Band (Relative to α min)		313.92 to 314.98 MHz		2.2	3.0	
		313.90 to 315.00 MHz		2.7	3.4	
Relative Attenuation (Relative to α min)						dB
10 to 180 MHz			61	66		
180 to 200 MHz			57	62		
300 to 310 MHz			26	31		
310 to 313 MHz			11	16		
315.9 to 318.8 MHz			11	16		
318.9 to 326 MHz			18	25		
326 to 328 MHz			31	36		
328 to 340 MHz			36	41		
340 to 389 MHz			41	46		
389 to 568 MHz			54	59		
568 to 1164 MHz			61	66		
1164 to 2250 MHz			51	57		
2250 to 2500 MHz			55	61		
Input: $Z_{IN} = Ls1/Cp1$				130/8.2		nH/pF
Output: $Z_{OUT} = Ls2/Cp2$				120/5.6		
Terminating Source Impedance (single)	Z_S			50		Ω
Terminating Load Impedance (single)	Z_L			50		


Case Style	SM3030-6 3.0 x 3.0 mm Nominal Footprint		
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	5J, <u>YWWS</u>		
Standard Reel Quantity	Reel Size 7 Inch	500 Pieces/Reel	
	Reel Size 13 Inch	3000 Pieces/Reel	

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

- NOTES:**
1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
 2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_C .
 3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
 4. The design, manufacturing process, and specifications of this filter are subject to change.
 5. US and international patents may apply.
 6. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Electrical Connections

Connection	Terminals
Input/Input Return	1
Input Return/Input	2
Output Return/Output	4
Output/Output Return	5
Ground	3, 6

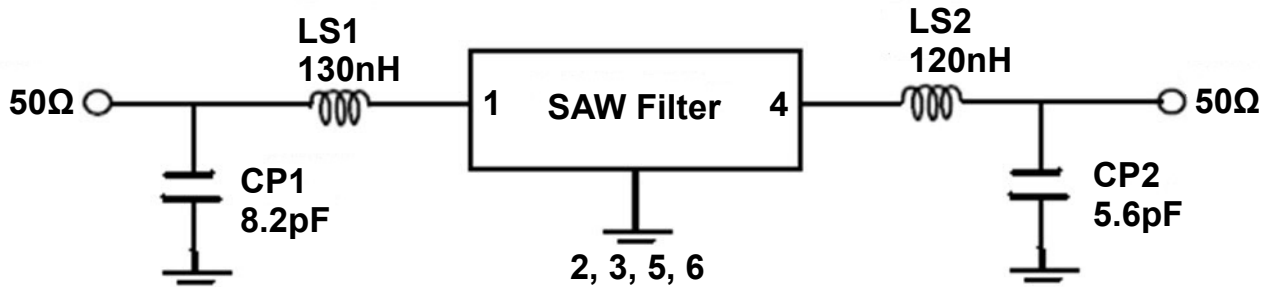

LS1 = Murata LQW18ANR13G00


LS2 = Murata LQW18ANR12G00

CP1 = Murata GRM1555C1H8R2DA01

CP2 = Murata GRM1555C1H5R6DA01


RF3624E Frequency Characteristics

S21 Response: span 200 MHz

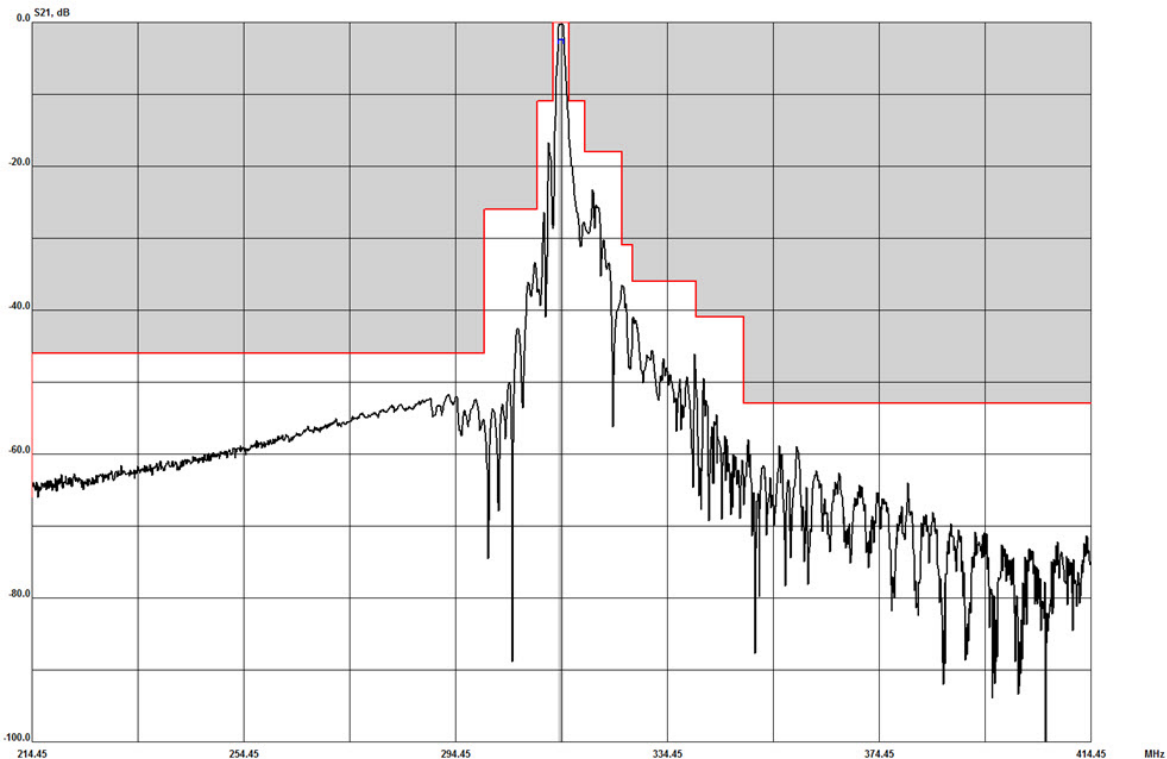


RF3624E Frequency Characteristics (continued)

S21 Response: span 2 MHz


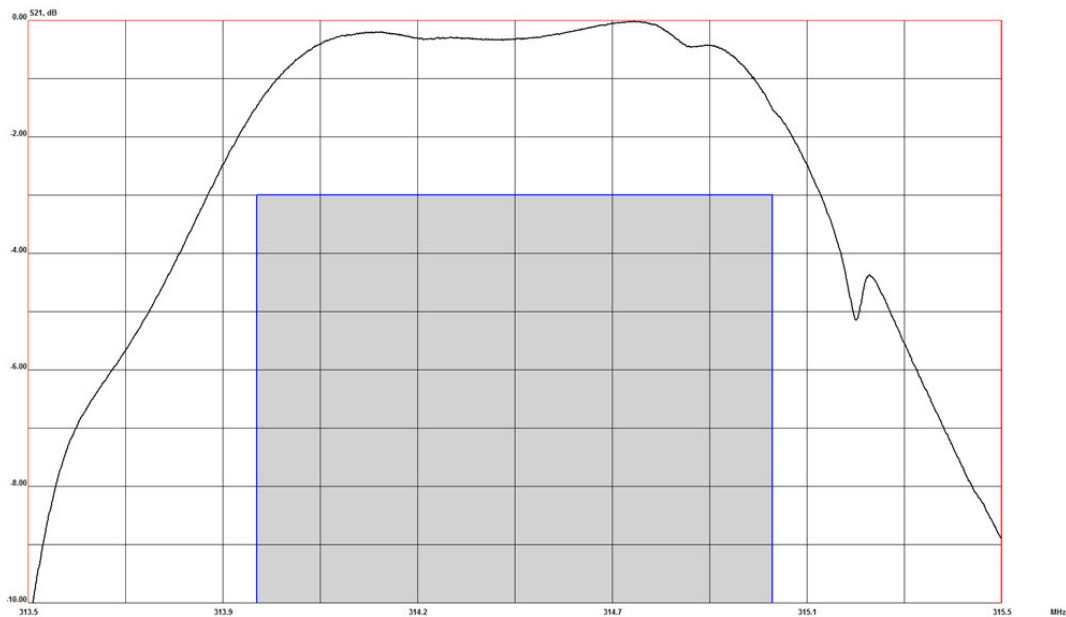


S21 Response: span 10 MHz to 2.5 GHz

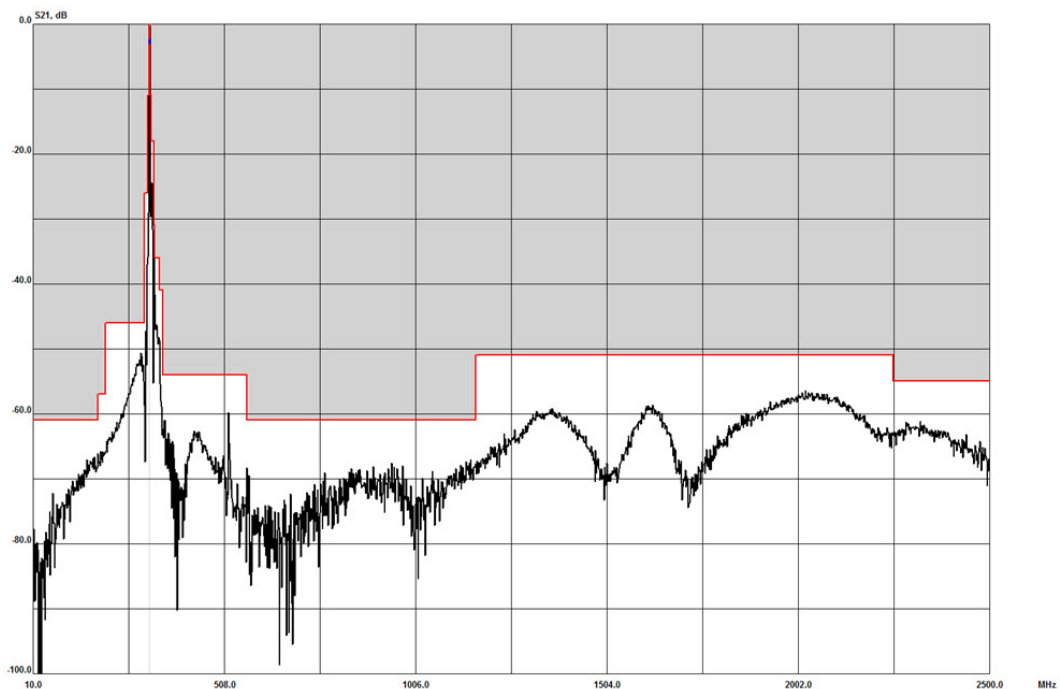

SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case 3.0 X 3.0 mm Nominal Footprint

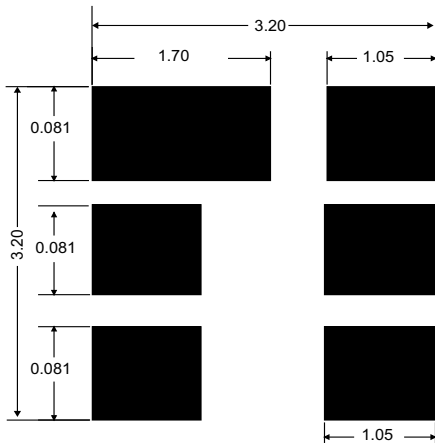

PCB Footprint (in millimeters)


Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.90	3.00	3.10	0.114	0.118	0.122
B	2.90	3.00	3.10	0.114	0.118	0.122
C	--	-	1.40	-	-	0.055
D	-	-	1.00	-	-	0.039
E	-	1.50	-	-	0.059	-
F	-	0.60	-	-	0.023	-
G	-	1.60	-	-	0.062	-
H	-	2.80	-	-	0.110	-
I	-	1.30	-	-	0.051	-
J	-	0.85	-	-	0.033	-


Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel
Lid Plating	2.0 to 3.0 μm Nickel
Body	Al_2O_3 Ceramic
Pb Free	


TOP VIEW

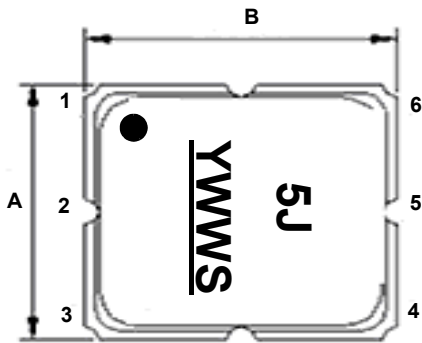

BOTTOM VIEW

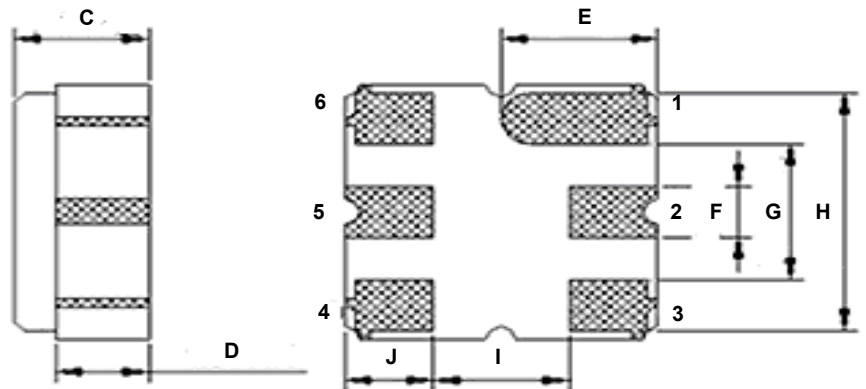

Tape and Reel Specifications

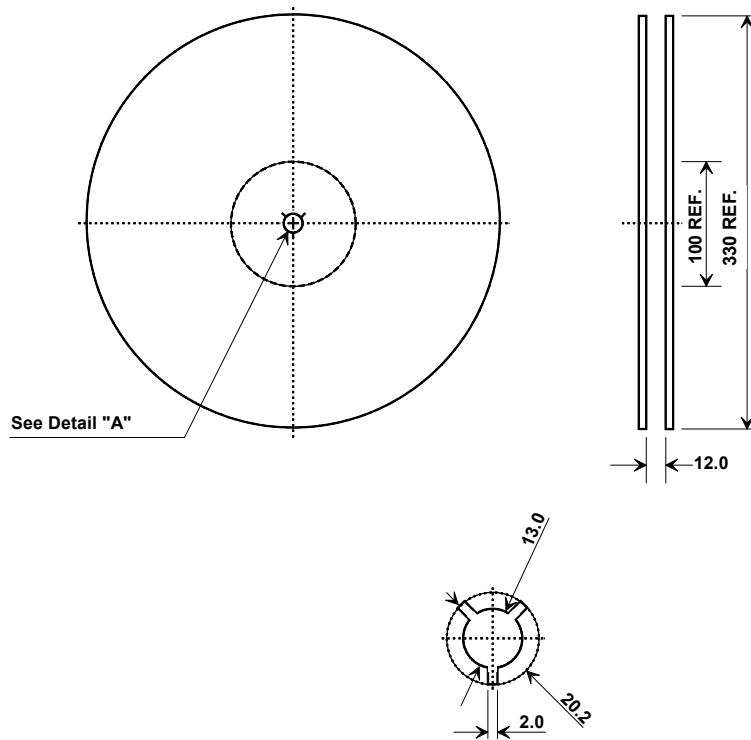

COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

