SMD / SMT Inductors (Coils) SLF7055T-4R7N3R1-3PF

Applications	Commercial Grade
	Wire Wound Wire Wound
Feature	Shield Magnetic Shield
	Ferrite Core
Series Type	SLF
Status	Production
Brand	ТДК



Size		
Length(L)	7.00mm ±0.20mm	
Width(W)	7.00mm ±0.20mm	
Thickness Height	5.50mm ±0.30mm	
Recommended Land Pattern (A)	1.50mm Nom.	
Recommended Land Pattern (B)	4.80mm Nom.	
Recommended Land Pattern (C)	2.20mm Nom.	


Electrical Characteristics			
Inductance	4.7µH ±30% at 100kHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	3.6A (10% Down)		
Rated Current (Temperature Rise) [Typ.]	3.1A (30°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	28mΩ		
DC Resistance [Max.]	36.4mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
Coldering Mathed	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [330mm Reel]		
Package Quantity	1000pcs		
Weight	0.8g		

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

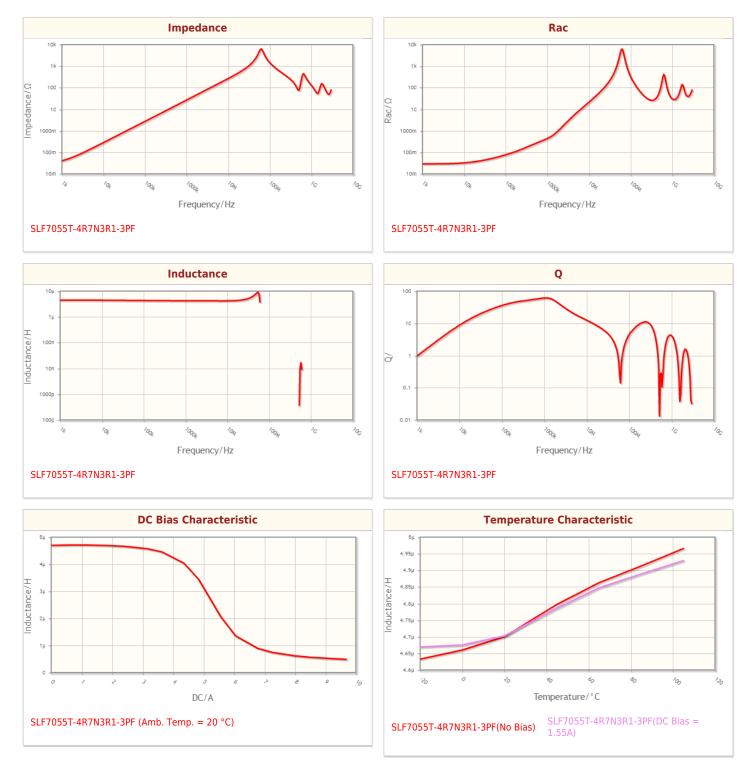

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

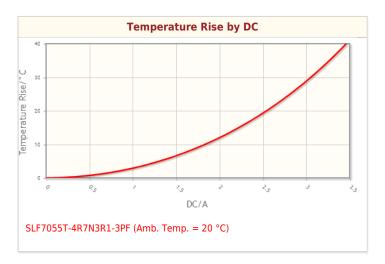

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

Associated Images

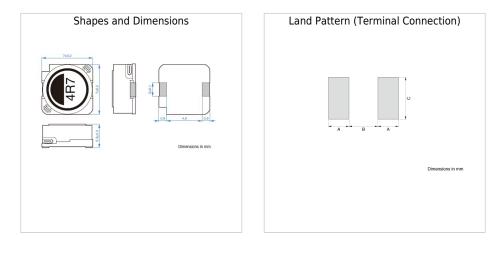

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.