RoHS Reach Halogen Free Pb Free



Applications	Commercial Grade
	Multilayer Multilayer
Feature	Shield Magnetic Shield
	Ferrite Core
Series Type	MLF
Status	Production



Size		
Length(L)	1.00mm ±0.05mm	
Width(W)	0.50mm ±0.05mm	
Thickness Height	0.50mm ±0.05mm	
Recommended Land Pattern (A)	0.50mm Nom.	
Recommended Land Pattern (B)	0.40mm Nom.	
Recommended Land Pattern (C)	0.50mm Nom.	

Electrical Characteristics		
Inductance	220nH ±5% at 25MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	160mA	
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	470mΩ	
DC Resistance [Max.]	790mΩ	
Self Resonant Frequency [Min.]	290MHz	
Self Resonant Frequency [Typ.]	450MHz	
Q [Min.]	15 at 25MHz	
Q [Typ.]	30 at 25MHz	


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldaring Mathad	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	10000pcs	
Weight	0.0012g	


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

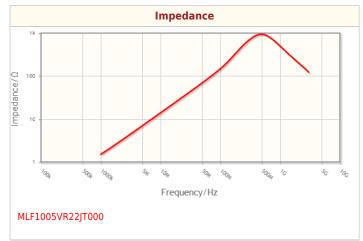

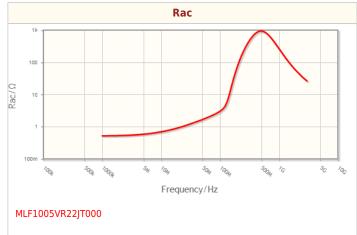

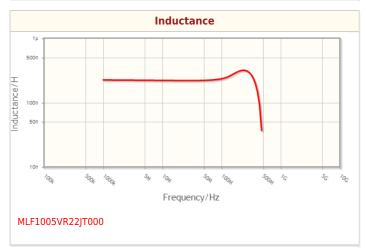

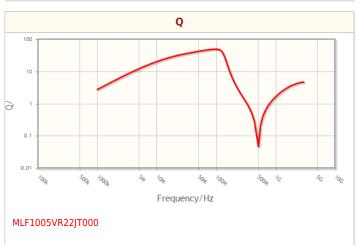



[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

Associated Images





 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.