











Applications	Commercial Grade	
Feature	No Directivity  Shield Magnetic Shield  Wire Wound Wire Wound  Ferrite Core	
Series   Type	NLFV32-EF	
Status	Production	
Brand	TDK	



Size		
Length(L)	3.20mm ±0.20mm	
Width(W)	2.50mm ±0.20mm	
Thickness   Height	2.20mm ±0.20mm	
Recommended Land Pattern (A)	1.20mm Nom.	
Recommended Land Pattern (B)	2.00mm Nom.	
Recommended Land Pattern (C)	2.00mm Nom.	

Electrical Characteristics		
Inductance	220μH ±10% at 796kHz	
Rated Current	40mA	
DC Resistance [Typ.]	5.1Ω	
DC Resistance [Max.]	6.12Ω	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.05g	

<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.














# Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

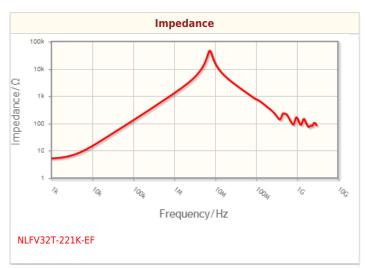


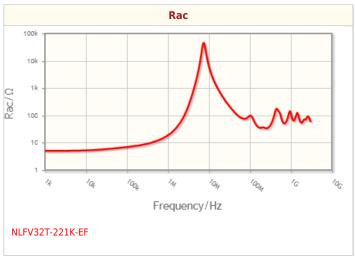



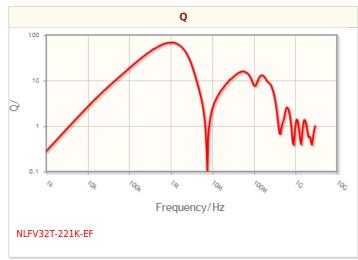

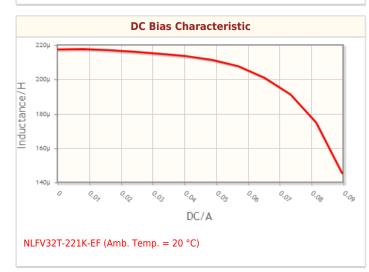

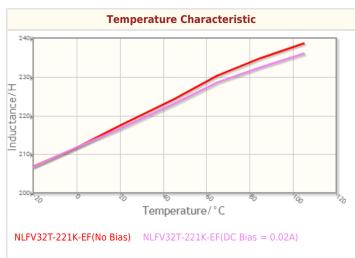

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.














### Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

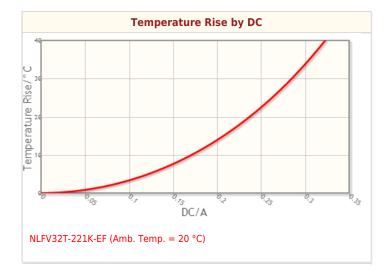

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.















## **Associated Images**





<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.