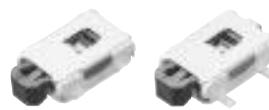


**6.1 mm×4.0 mm Side-operational SMD
Light Touch Switches**Type: **EVQPS****■ Features**

- External dimensions : 6.1 mm×4.0 mm, Height 1.8 mm
- Terminal shapes : straight, J-bent

■ Recommended Applications

- Car navigation, Car audio

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9
E	V	Q	P	S		0	2	K
Type								
6th			7th & 8th			9th		
Embossed Taping	Terminal Shape	Operating Force	02	Height	K	Push Plate Color		
Without Boss	With Boss			1.8 mm		Black		
C	D	J-bent						
L	M	Straight	1.6 N					
G	H	J-bent						
Q	R	Straight	2.2 N					

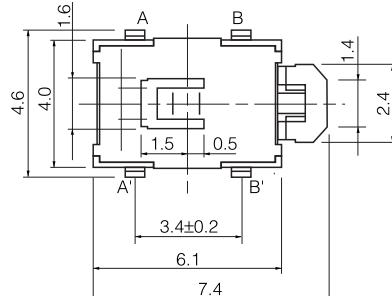
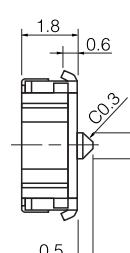
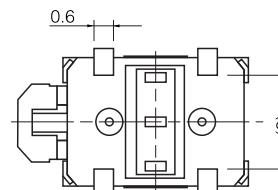
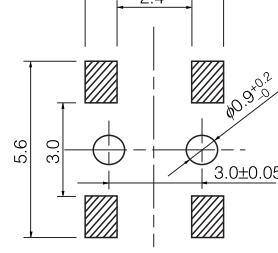

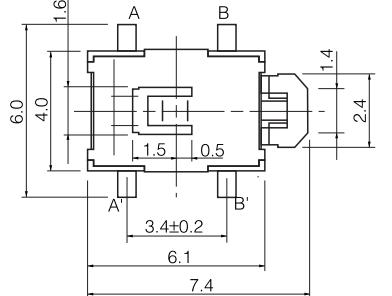
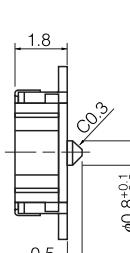
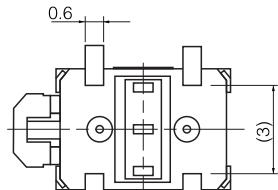
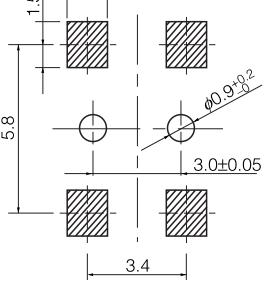
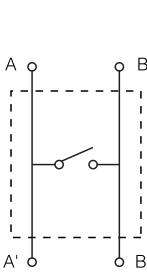
■ Specifications

Type	Snap action / Push-on type SPST		
Electrical	Rating	10 μ A 2 Vdc to 50 mA 12 Vdc (Resistive load)	
	Contact Resistance	500 m Ω max.	
	Insulation Resistance	100 M Ω min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	10 ms max. (ON, OFF)	
Mechanical	Operating Force	1.6 N ^{+0.7} _{-0.4} N	2.2 N ^{+0.8} _{-0.7} N
	Travel	0.3 mm ^{+0.1} _{-0.2} mm	
	Push Strength	30 N for 1 minute	
Endurance	Operating Life	100000 cycles min.	
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)	
Minimum Quantity/Packing Unit		4000 pcs. Embossed Taping (Reel Pack)	
Quantity/Carton		16000 pcs.	

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

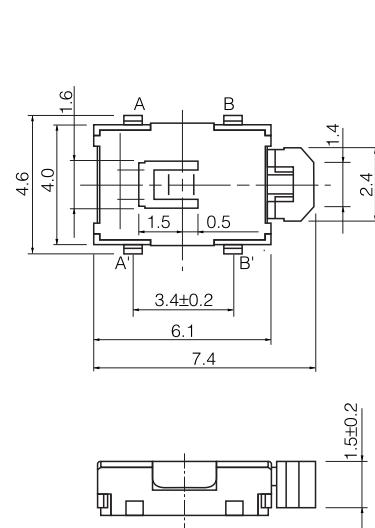
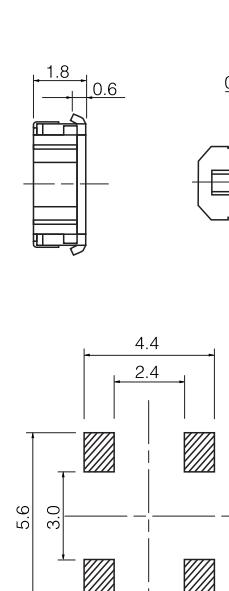
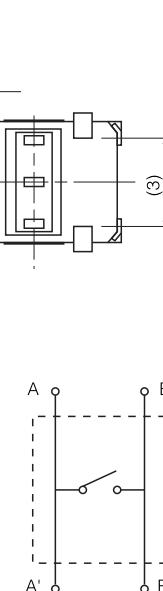
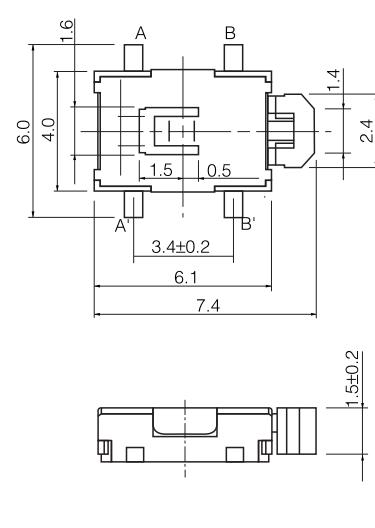
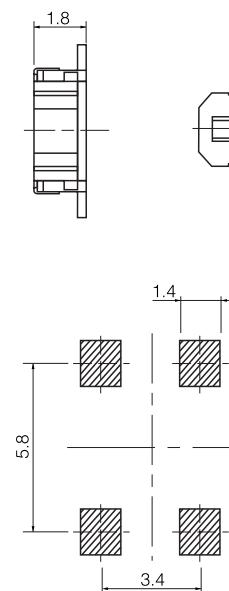
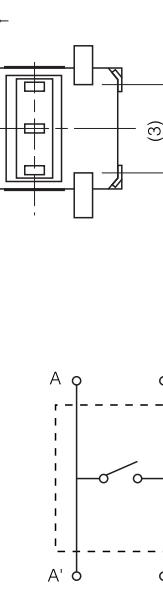
■ Dimensions in mm (not to scale)

No. 1	 <p>EVQPSD EVQPSH J-bent terminals, with Boss</p>	    	<p>PWB land pattern for reference (Tolerance:± 0.1)</p> <p>Circuit Diagram</p>	
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQPSD02K	1.6 N	1.8 mm	Black	100000 cycles
EVQPSH02K	2.2 N	1.8 mm	Black	100000 cycles
No. 2	 <p>EVQPSM EVQPSR Straight terminals, with Boss</p>	    	<p>PWB land pattern for reference (Tolerance:± 0.1)</p> <p>Circuit Diagram</p>	
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQPSM02K	1.6 N	1.8 mm	Black	100000 cycles
EVQPSR02K	2.2 N	1.8 mm	Black	100000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

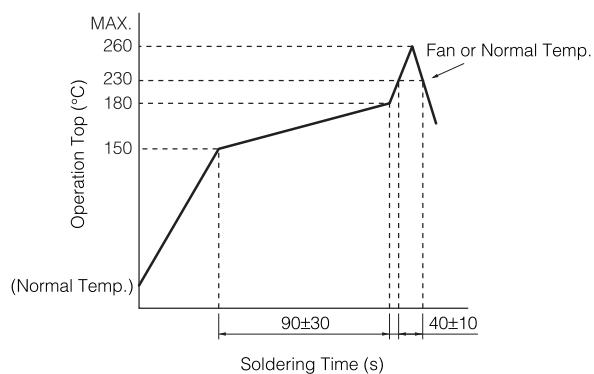
■ Dimensions in mm (not to scale)

No. 3	 <p>EVQPSC EVQPSG</p> <p>J-bent terminals, without Boss</p>	  
		<p>PWB land pattern for reference (Tolerance:± 0.1)</p> <p>Circuit Diagram</p>
Part Numbers	Operating Force	Height
EVQPSC02K	1.6 N	1.8 mm
EVQPSG02K	2.2 N	1.8 mm
No. 4	 <p>EVQPSL EVQPSQ</p> <p>Straight terminals, without Boss</p>	  
		<p>PWB land pattern for reference (Tolerance:± 0.1)</p> <p>Circuit Diagram</p>
Part Numbers	Operating Force	Height
EVQPSL02K	1.6 N	1.8 mm
EVQPSQ02K	2.2 N	1.8 mm

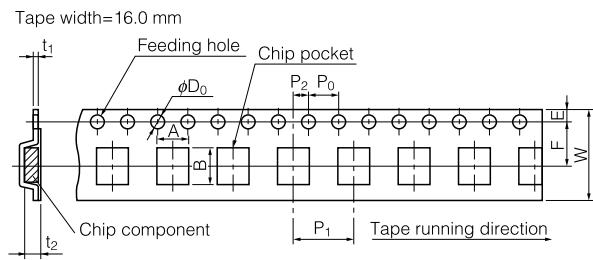
Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

■ Recommended Reflow Soldering Conditions

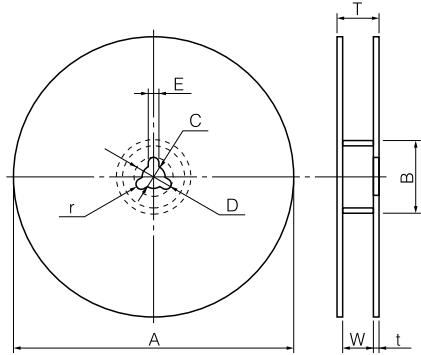


● Embossed Carrier Taping



Unit: mm												
Part No.	Height	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀ Dia.	t ₁	t ₂
EVQPS	1.8	6.8±0.2	8.0±0.2	16.0±0.3	7.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₋₀	0.30±0.05	2.7±0.2

● Standard Reel Dimensions in mm (not to scale)



Item	A	B	C	D	E
Rate (mm)	φ370.0±2.0	φ50.0 min.	φ13.0±0.5	φ21.0±1.0	2.0±0.5
Item	W	T	t	r	
Rate (mm)	18.0±1.5	—	1.0 to 3.0	1.0±0.5	