RoHS Reach Halogen Free Pb Free



MHQ0603P1N6BT000

Applications	Commercial Grade	
Feature	Multilayer Non-Mag Core Non-Magnetic Core (Dielectric Ceramic) Super High Q Super High Q	
Series Type	MHQ-P	
Status	Production	
Brand	TDK	



	Size
Length(L)	0.65mm ±0.05mm
Width(W)	0.35mm ±0.05mm
Thickness Height	0.35mm ±0.05mm
Recommended Land Pattern (A)	0.25mm Nom.
Recommended Land Pattern (B)	0.30mm Nom.
Recommended Land Pattern (C)	0.30mm Nom.

Electrical Characteristics		
Inductance	1.6nH ±0.1nH at 500MHz	
Rated Current	800mA	
DC Resistance [Typ.]	60mΩ	
DC Resistance [Max.]	100mΩ	
Self Resonant Frequency [Min.]	10GHz	
Self Resonant Frequency [Typ.]	17.5GHz	
Q [Min.]	16 at 500MHz	
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Soldering Method	Reflow	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]	
Package Quantity	15000pcs	
Weight	0.0002g	


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


 $^{! \ \}mbox{All specifications}$ are subject to change without notice.


RoHS Reach Halogen Free Pb Free

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

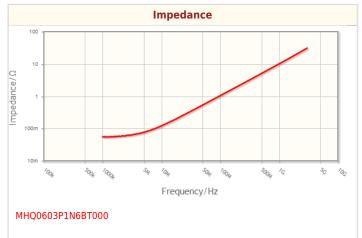

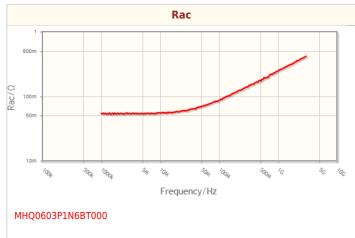

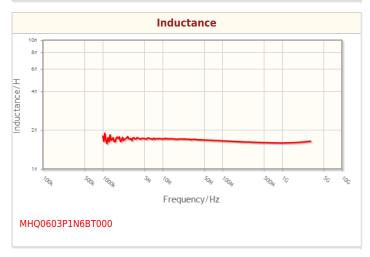

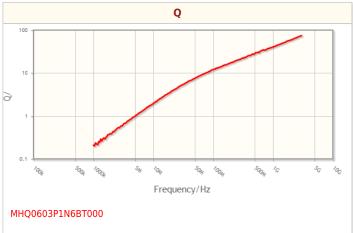


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

Associated Images





[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

 $^{! \ \}mbox{All specifications}$ are subject to change without notice.