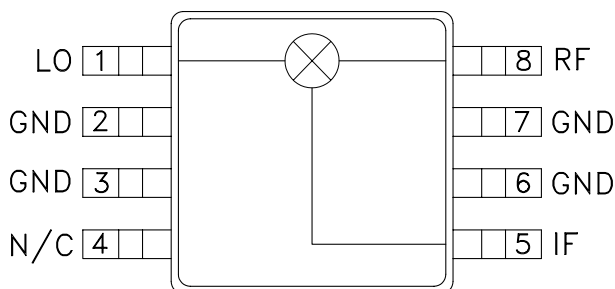


Typical Applications

The HMC218MS8 / HMC218MS8E is ideal for:

- Basestations, Repeaters & Access Points
- WiMAX, WiBro & Fixed Wireless
- Portables & Subscribers
- PLMR, Public Safety & Telematics

Functional Diagram



Features

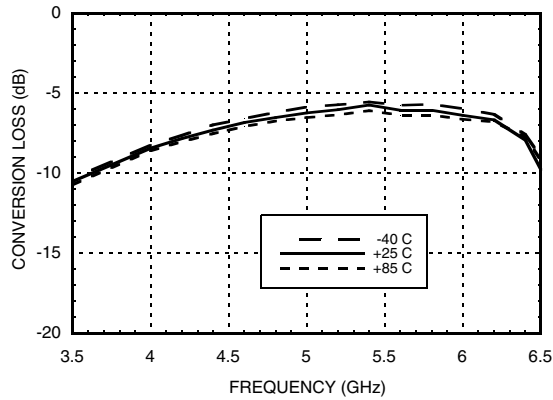
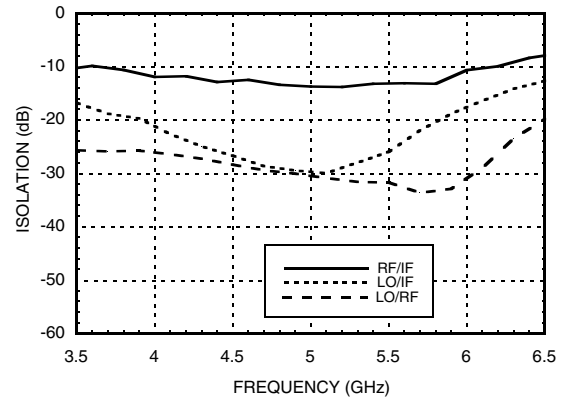
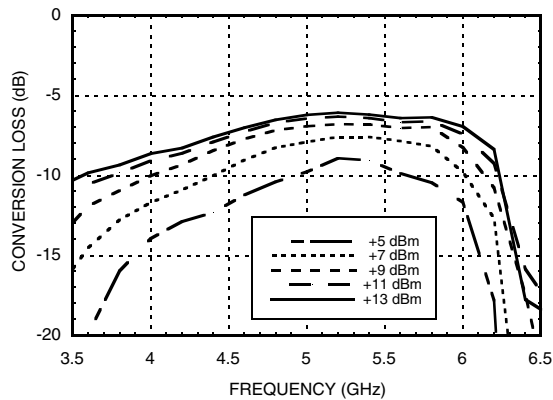
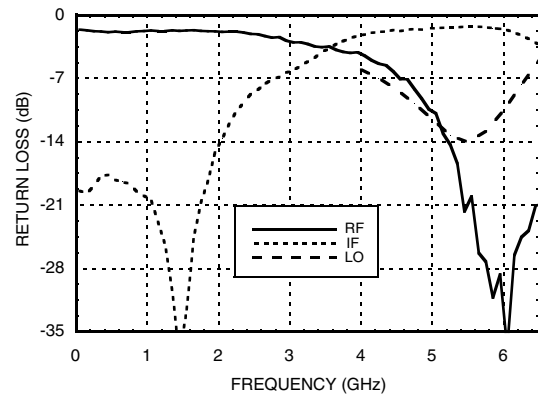
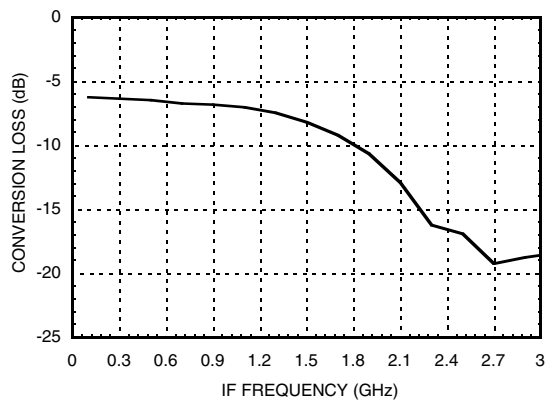
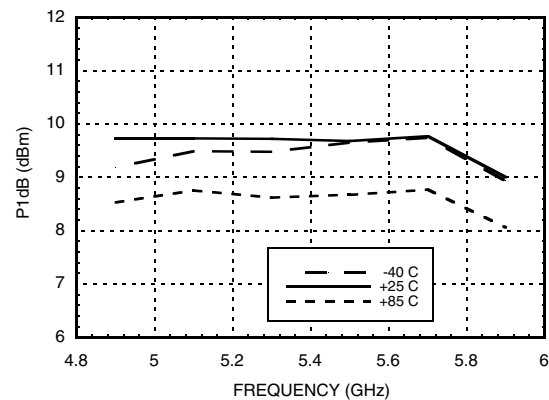
- Passive Double-Balanced Topology
- Input IP3: +18 dBm
- Low Conversion Loss: 6.5 dB
- LO / RF Isolation: 30 dB
- LO / IF Isolation: 25 dB
- Upconverter & Downconverter Applications

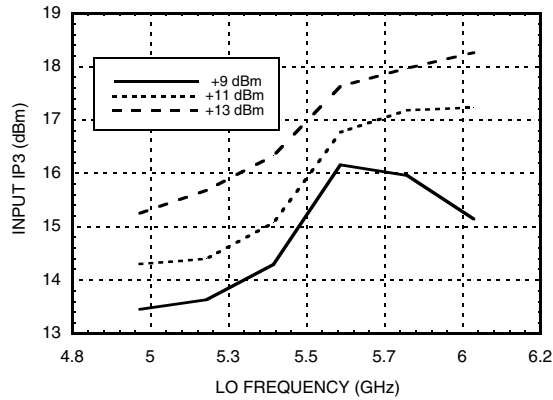
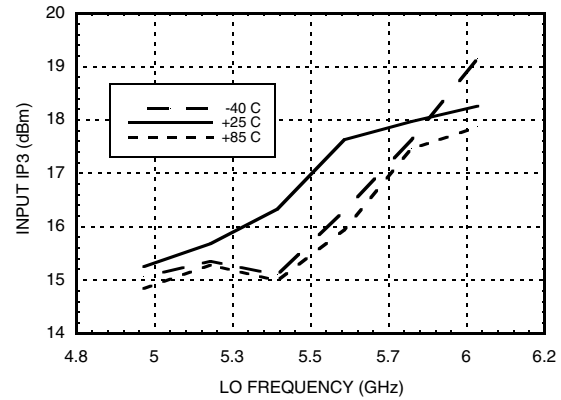
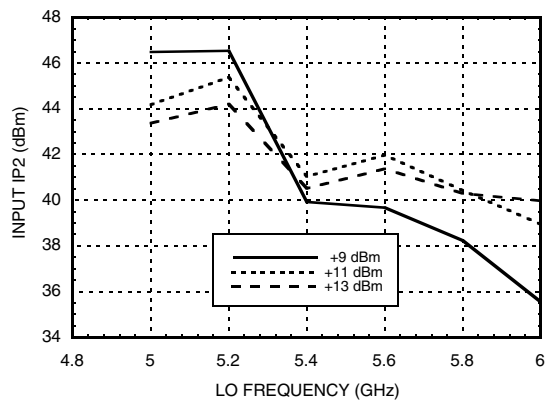
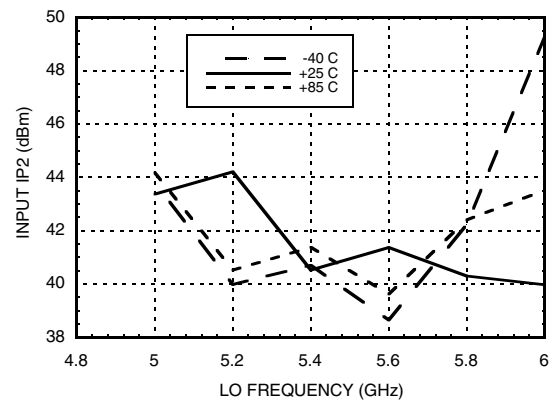
General Description

The HMC218MS8 & HMC218MS8E are ultra miniature double-balanced mixers in 8 lead plastic surface mount packages (MSOP). This passive MMIC mixer is constructed of GaAs Schottky diodes and novel planar transformer baluns on the chip. The device can be used as an upconverter, downconverter, bi-phase modulator / demodulator, or phase comparator. The low conversion loss, high isolation and wide IF bandwidth make this mixer ideal for a variety of Rx and Tx frequency plans.

Electrical Specifications, $T_A = +25^\circ \text{C}$, As a Function of LO Drive

Parameter	LO = +13 dBm IF = 100 MHz			LO = +10 dBm IF = 100 MHz			LO = +7 dBm IF = 100 MHz			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range, RF & LO	4.5 - 6.0			4.5 - 6.0			4.7 - 5.9			GHz
Frequency Range, IF	DC - 1.6			DC - 1.6			DC - 1.5			GHz
Conversion Loss		6.5	8.5		8	9.5		8	9.5	dB
Noise Figure (SSB)		6.5	8.5		8	9.5		8	9.5	dB
LO to RF Isolation	25	30		25	30		23	28		dB
LO to IF Isolation	15	25		14	25		12	23		dB
IP3 (Input)	5.2 GHz	12	16	11	14		9	12		dBm
	5.8 GHz	15	18	13	17		10	13		
1 dB Gain Compression (Input)	7	10		5	9		4	7		dBm


GAAS MMIC SMT
DOUBLE-BALANCED MIXER, 4.5 - 6 GHz
Conversion Loss vs.
Temperature @ LO = +13 dBm

Isolation @ LO = +13 dBm

Conversion Loss vs. LO Drive

Return Loss @ LO = +13 dBm

IF Bandwidth @ LO = +13 dBm

P1dB vs.
Temperature LO = +13 dBm


Input IP3 vs. LO Drive

Input IP3 vs. Temperature @ LO = +13 dBm

Input IP2 vs. LO Drive

Input IP2 vs. Temperature @ LO = +13 dBm



GAAS MMIC SMT
DOUBLE-BALANCED MIXER, 4.5 - 6 GHz
MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	0	15	23	36
1	10	0	34	27	59
2	67	61	56	59	68
3	97	82	81	60	77
4	>105	>105	>105	>105	96

RF = 5.15 GHz @ -10 dBm
 LO = 5.25 GHz @ +13 dBm
 All values in dBc relative to the IF

Harmonics of LO

LO Freq. (GHz)	nLO Spur at RF Port			
	1	2	3	4
5.0	31	30	57	68
5.2	31	32	59	69
5.4	32	35	62	73
5.6	32	35	64	76
5.8	33	35	65	76
6.0	33	32	64	68

LO = +13 dBm
 Values in dBc below input LO level measured at the RF port.

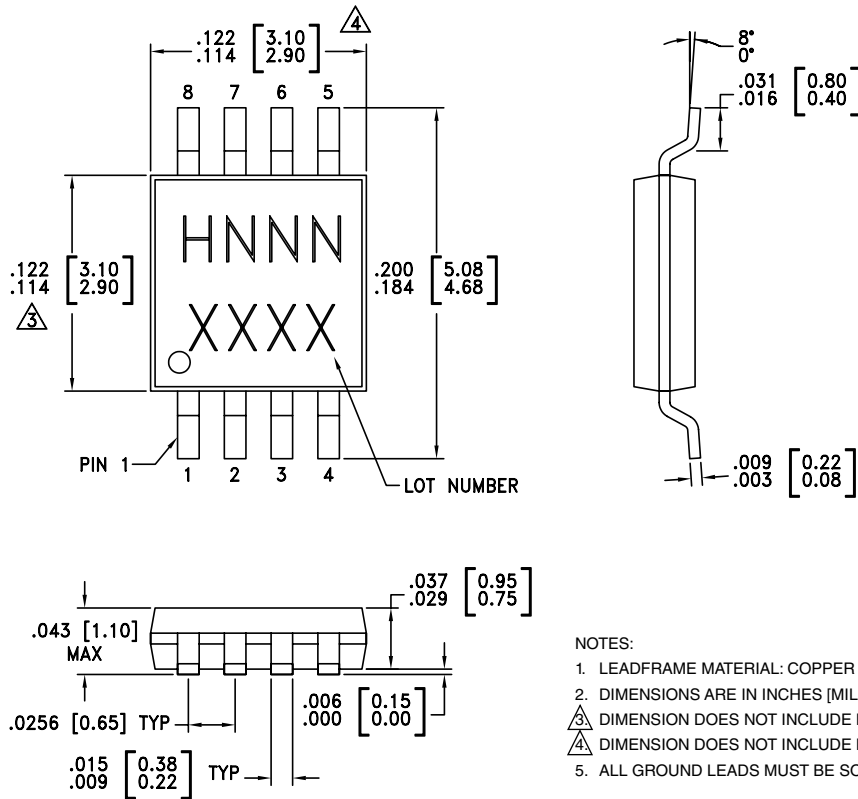
Absolute Maximum Ratings

RF / IF Input	+13 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing



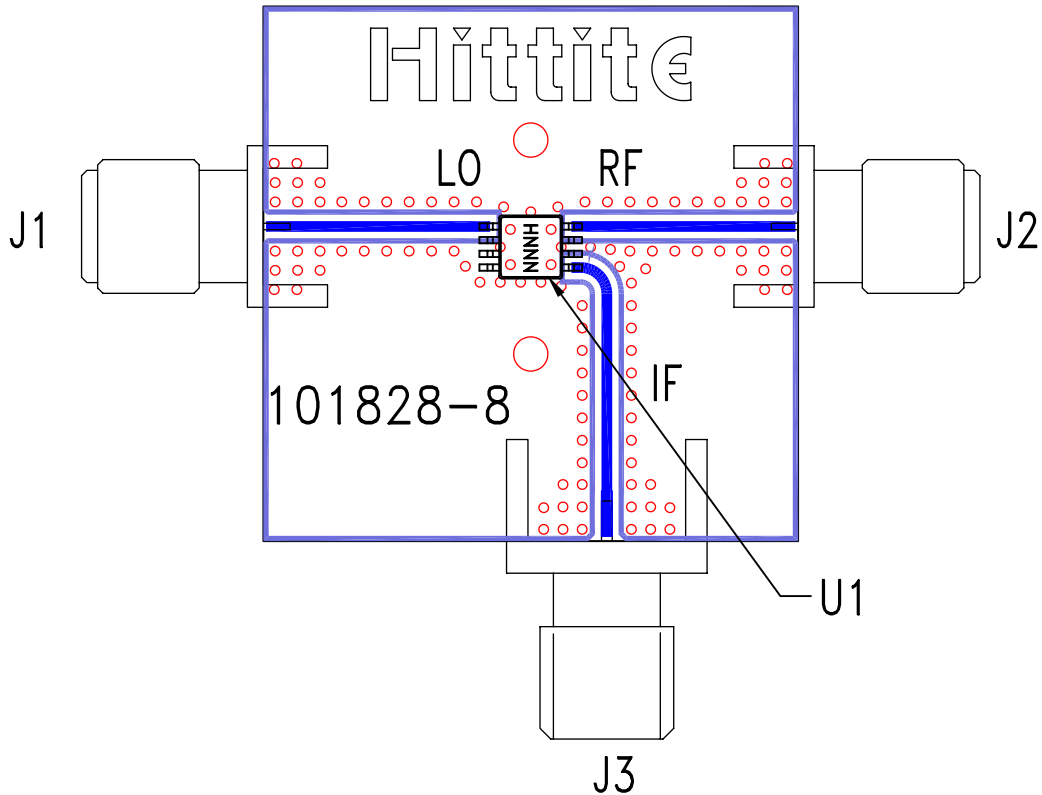
- NOTES:
1. LEADFRAME MATERIAL: COPPER ALLOY
 2. DIMENSIONS ARE IN INCHES [MILLIMETERS].
 - △ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
 - ▲ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
 5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC218MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	H218 XXXX
HMC218MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H218 XXXX

[1] Max peak reflow temperature of 235 °C
 [2] Max peak reflow temperature of 260 °C
 [3] 4-Digit lot number XXXX

Evaluation Circuit Board



List of Materials for Evaluation PCB 101830 [1]

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC218MS8 / HMC218MS8E Mixer
PCB [2]	101828 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.