# SMD / SMT Inductors (Coils)

SMD / SMT Inductors (Coi SPM4015T-4R7M

RoHS Reach Halogen Free Pb Free

| Applications  | Commercial Grade  |   |  |
|---------------|---|---|--|
| Feature       | Wire Wound  |   |  |
|               | Shield Magnetic Shield  |   |  |
|               | Metal Core Metal Core   |   |  |
| Series   Type | SPM   |   |  |
| Status        | A EOL announced   | ø |  |
|               | Recommended Alternate Part No. : <u>SPM4015T-4R7M-LR</u> (Interchangeability is not |   |  |
|               | guaranteed.)  | 0 |  |
|               | Discontinue Issue Date : Jun.3, 2022  |   |  |
|               | Last Purchase Order Date : Sep.30, 2023   |   |  |
|               | Last Shipment Date : Mar.31, 2024   |   |  |
| Brand         | TDK   |   |  |

| Size                         |                |  |
|------------------------------|----------------|--|
| Length(L)                    | 4.40mm ±0.20mm |  |
| Width(W)                     | 4.10mm ±0.20mm |  |
| Thickness   Height           | 1.50mm Max.    |  |
| Recommended Land Pattern (A) | 1.65mm Nom.    |  |
| Recommended Land Pattern (B) | 1.65mm Nom.    |  |
| Recommended Land Pattern (C) | 2.30mm Nom.    |  |

| Electrical Characteristics              |                      |  |  |  |
|---|----------------------|--|--|--|
| Inductance                              | 4.7µH ±20% at 100kHz |  |  |  |
| Rated Current (L Change) [Typ.]         | 3.3A (30% Down)      |  |  |  |
| Rated Current (L Change) [Max.]         | 2.5A (30% Down)      |  |  |  |
| Rated Current (Temperature Rise) [Typ.] | 1.8A (40°C Rise)     |  |  |  |
| Rated Current (Temperature Rise) [Max.] |                      |  |  |  |
| DC Resistance [Typ.]                    | 187.7mΩ              |  |  |  |
| DC Resistance [Max.]                    | 215.9mΩ              |  |  |  |
| Self Resonant Frequency [Min.]          |                      |  |  |  |
| Self Resonant Frequency [Typ.]          |                      |  |  |  |
| Q [Min.]                                |                      |  |  |  |
|   |                      |  |  |  |

Q [Typ.]

| Other   |  |  |  |  |
|---|--|--|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 125°C   |  |  |  |
| Coldoring Mathed                                  | Reflow   |  |  |  |
| Soldering Method                                  | Iron Soldering   |  |  |  |
| AEC-Q200  | NO   |  |  |  |
| Packing   | Embossed (Plastic)Taping [180mm Reel, Tape width 12mm] |  |  |  |

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


# **<b>&TDK** SMD / SMT Inductors (Coils) SPM4015T-4R7M


RoHS Reach Halogen Free Pb Free


| Package Quantity | 1000pcs |
|------------------|---------|
| Weight           | 0.1224g |


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

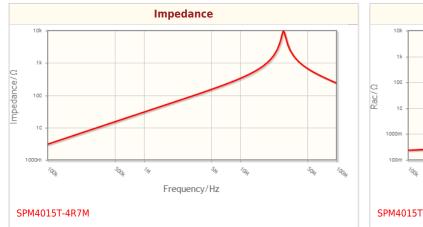


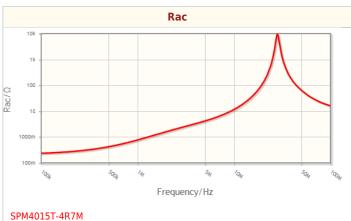


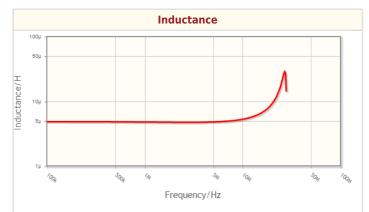

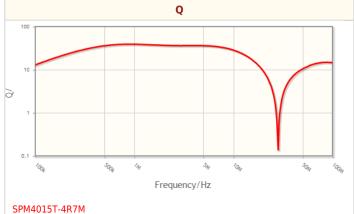

#### SPM4015T-4R7M

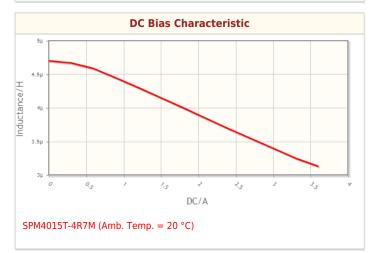




! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

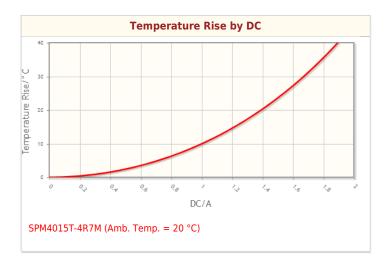


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

RoHS Reach Halogen Free Pb Free

## Associated Images

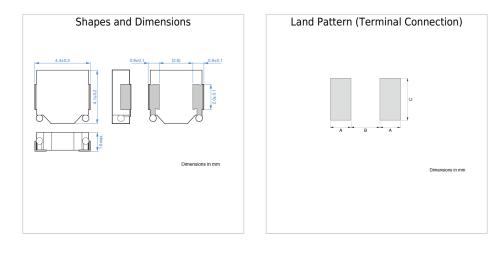

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.