RoHS Reach Halogen Free Pb Free



| Applications  | Commercial Grade   |  |  |
|---------------|--|--|--|
|               | Wire Wound Wire Wound  |  |  |
| Feature       | Shield Magnetic Shield   |  |  |
|               | Ferrite Core   |  |  |
| Series   Type | VLF-M  |  |  |
| Status        | ↑ Obsolete   |  |  |
|               | Recommended Alternate Part No. : <u>VLS3012HBX-220M-N</u> (Interchangeability is not |  |  |
|               | guaranteed.)   |  |  |
|               | Discontinue Issue Date : May.18, 2017  |  |  |
|               | Last Purchase Order Date : Mar.31, 2021  |  |  |
|               | Last Shipment Date : Sep.30, 2021  |  |  |
| Brand         | TDK  |  |  |





| Size                         |                |  |
|------------------------------|----------------|--|
| Length(L)                    | 3.00mm ±0.20mm |  |
| Width(W)                     | 2.50mm ±0.20mm |  |
| Thickness   Height           | 1.20mm Max.    |  |
| Recommended Land Pattern (A) | 0.90mm Nom.    |  |
| Recommended Land Pattern (B) | 0.80mm Nom.    |  |
| Recommended Land Pattern (C) | 1.45mm Nom.    |  |


| Electrical Characteristics              |                                |  |  |  |
|---|--------------------------------|--|--|--|
| Inductance                              | $22\mu H$ $\pm 20\%$ at $1MHz$ |  |  |  |
| Rated Current (L Change) [Typ.]         | 470mA (30% Down)               |  |  |  |
| Rated Current (L Change) [Max.]         | 430mA (30% Down)               |  |  |  |
| Rated Current (Temperature Rise) [Typ.] | 640mA (40°C Rise)              |  |  |  |
| Rated Current (Temperature Rise) [Max.] |                                |  |  |  |
| DC Resistance [Typ.]                    | 583mΩ                          |  |  |  |
| DC Resistance [Max.]                    | 700mΩ                          |  |  |  |
| Self Resonant Frequency [Min.]          |                                |  |  |  |
| Self Resonant Frequency [Typ.]          |                                |  |  |  |
| Q [Min.]                                |                                |  |  |  |
| Q [Typ.]                                |                                |  |  |  |


| Ot  | her                                   |
|---|---------------------------------------|
| Operating Temp. Range (Including Self-Temp. Rise)                                       | -40 to 105°C                          |
| Soldering Method  | Reflow                                |
| AEC-Q200  | NO                                    |
| Packing   | Embossed (Plastic)Taping [180mm Reel] |
| ! This PDF document was created based on the data listed on the TDK Corporation website | 2000pcs                               |
| Weight weight   | 0.033g                                |


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

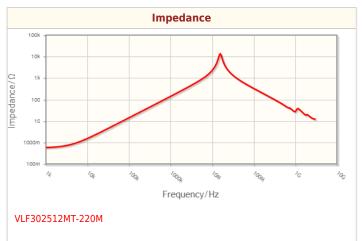


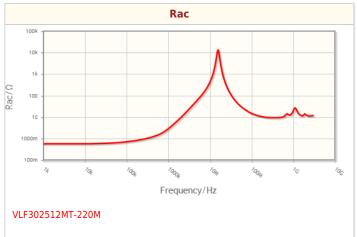

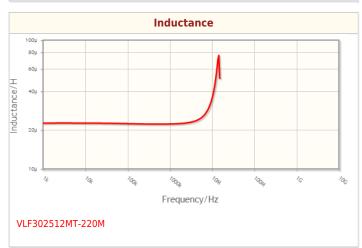

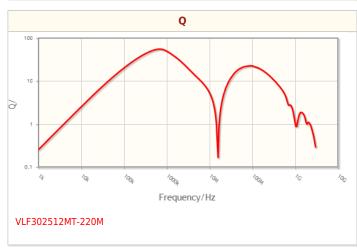

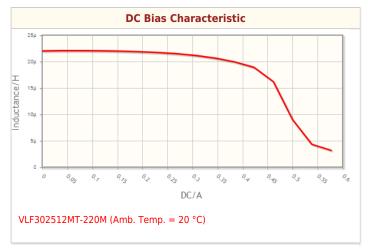

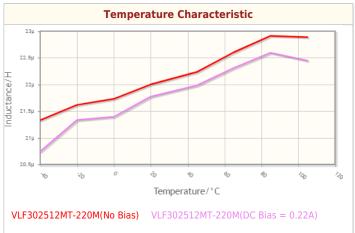


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

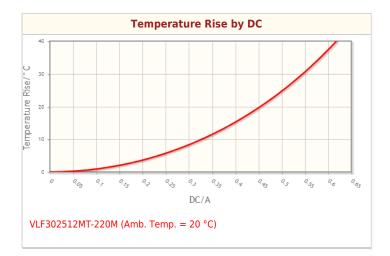


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

## **Associated Images**



 $<sup>!\ \</sup>mbox{Images}$  are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.