## **<b>&TDK** SMD / SMT Inductors (Coils) SLF12565T-102MR45-H

Applications	Automotive Grade	
Feature	AEC-Q200 AEC-Q200 Wire Wound Shield Magnetic Shield Ferrite Core Ferrite Core	
Series   Type	SLF-H	
Status	Production	
Brand	TDK	

	Size
Length(L)	12.50mm ±0.30mm
Width(W)	12.50mm ±0.30mm
Thickness   Height	6.50mm ±0.35mm
Recommended Land Pattern (A)	2.60mm Nom.
Recommended Land Pattern (B)	8.50mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.


Electrical Characteristics				
Inductance	1mH ±20% at 1kHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	450mA (10% Down)			
Rated Current (Temperature Rise) [Typ.]	500mA (40°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	1.68Ω			
DC Resistance [Max.]	2.016Ω			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 125°C	
Coldering Method	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	YES	
Packing	Embossed (Plastic)Taping [330mm Reel, Tape width 24mm]	
Package Quantity	500pcs	
Weight	2.9g	

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

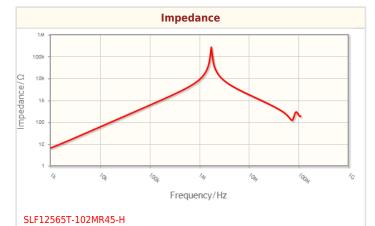

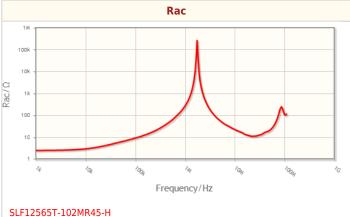



Inductance

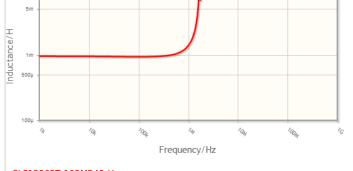

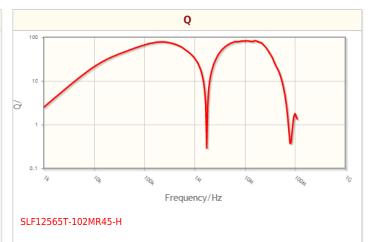

SLF12565T-102MR45-H

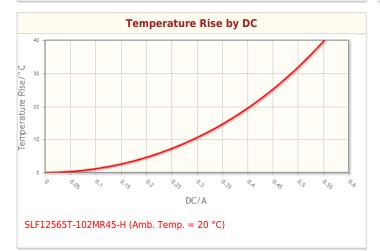




! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

## Associated Images

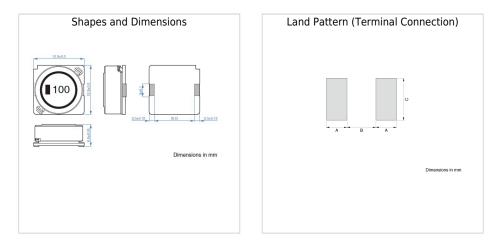

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.