


Applications	Commercial Grade
Feature	<div>Multilayer</div> <div>Magnetic Shield</div> <div>Ferrite Core</div>
Series Type	MLF
Status	<div>Obsolete</div> <p>Recommended Alternate Part No. : MLF1005G1R8KT000 (Interchangeability is not guaranteed.)</p> <p>Discontinue Issue Date : Aug.5, 2019</p> <p>Last Purchase Order Date : Mar.31, 2021</p> <p>Last Shipment Date : Sep.30, 2021</p>
Brand	TDK



Size	
Length(L)	1.00mm ±0.05mm
Width(W)	0.50mm ±0.05mm
Thickness Height	0.50mm ±0.05mm
Recommended Land Pattern (A)	0.50mm Nom.
Recommended Land Pattern (B)	0.40mm Nom.
Recommended Land Pattern (C)	0.50mm Nom.





Electrical Characteristics	
Inductance	1.8μH ±10% at 10MHz
Rated Current (L Change) [Typ.]	
Rated Current (L Change) [Max.]	20mA
Rated Current (Temperature Rise) [Typ.]	
Rated Current (Temperature Rise) [Max.]	
DC Resistance [Typ.]	
DC Resistance [Max.]	1.05Ω
Self Resonant Frequency [Min.]	90MHz
Self Resonant Frequency [Typ.]	
Q [Min.]	25 at 10MHz
Q [Typ.]	

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85°C
Soldering Method	Reflow Iron Soldering
AEC-Q200	NO
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000pcs

Weight	0.0012g
--------	---------

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

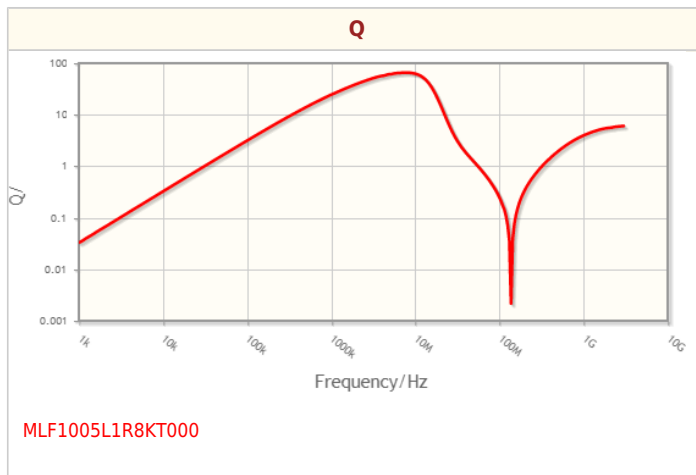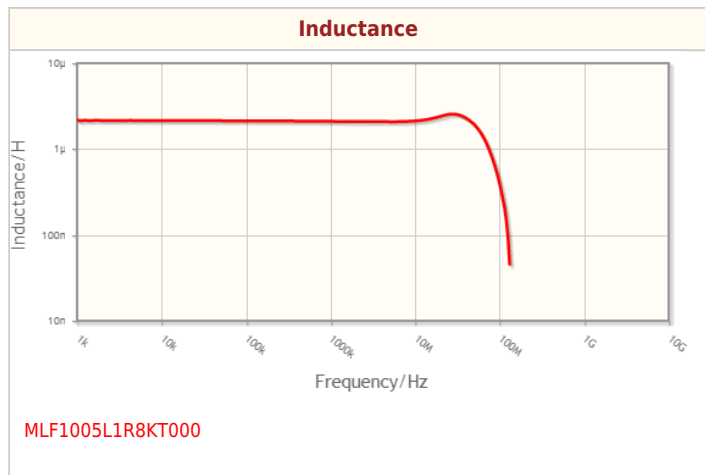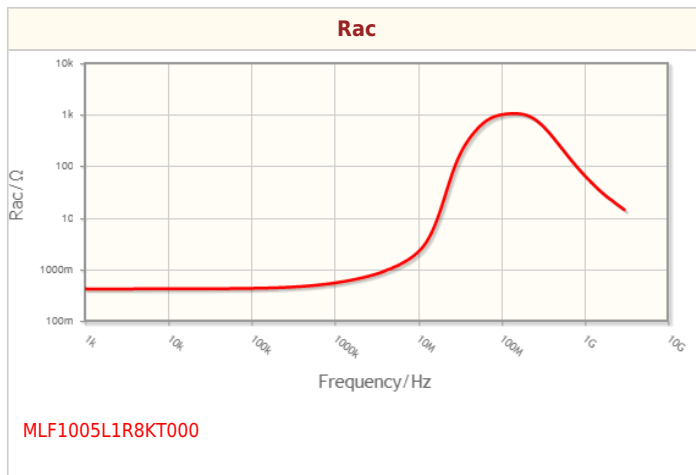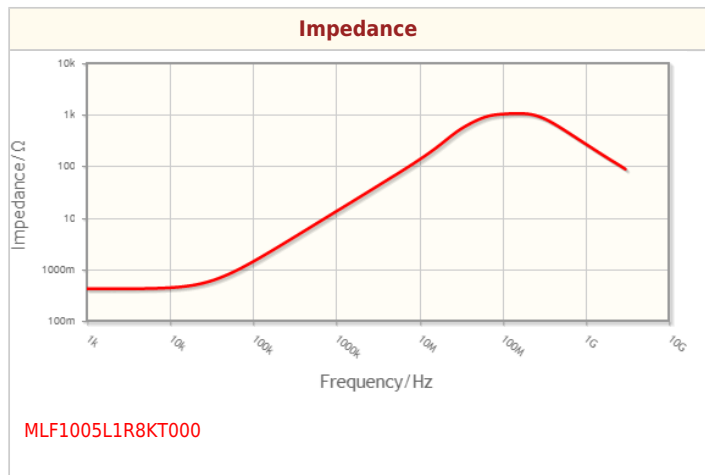

Associated Images

