Application Guides | Technical Support | Tech Library



Chip Beads

Size Length(L)

Width(W)

Thickness(T)

Recommended Land Pattern (A)

Recommended Land Pattern (B)

Recommended Land Pattern (C)

Search by Part No. Product Top Page

Search by Characteristics

1.60mm ±0.15mm

0.80mm ±0.15mm

0.60mm ±0.15mm

0.60mm Nom.

0.80mm Nom

0.80mm Nom

Catalog

Cross Reference

Catalog

Tech Note

Environment


Contact

Technical Support Tool





MMZ1608R121CTAH0

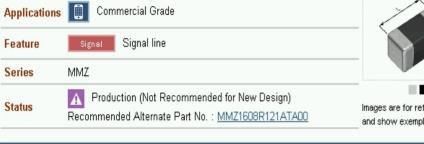




Images are for reference only and show exemplary products

PDF file of this page	<u> </u>
Contact	
Documents	
Product Lineup	
Sample Kits	
Technical Support Tools	
S-parameter	

SPICE Netlist (Simple)


🔼 Equivalent Circuit Model




Rated Current 250mΩ DC Resistance (Max.)

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125℃
Soldering Method	Reflow Iron Soldering
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs
Weight	0.003a

Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

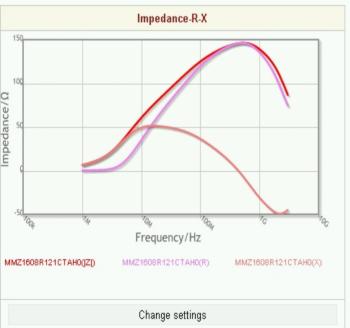



Products » Search by Part No. » Search by Characteristics » Distributor Inventory Check » Noise Suppressing / Magnet Sheets » Anechoic Chambers and Radio Wave Absorbers » Inductors (Coils) » EMC Components » Power Supplies » RF / SAW Components and Modules » Magnets » Voltage / Current / Temperature Protection Devices » Flash Storages » Sensors and Sensor Systems » Wireless Charging » Ceramic Switching / Heating, Piezo Components and » FA Systems » Transparent Conductive Film » Transformers » Micro Modules (Substrates with Built-in ICs, Products Utilizing with SESUB) » Solar Cells » Ferrites and Accessories

Application Guides Technical Support Tech Library Environment Contact News Home About TDK TDK Worldwide