


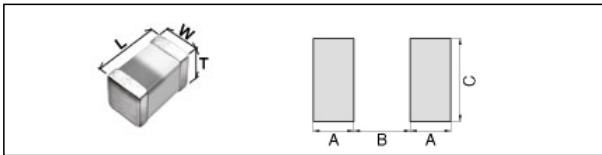


# MLG0603SR11JT000

Applications	 Commercial Grade
Feature	 Multilayer
	 Non-Magnetic Core (Dielectric Ceramic)
Series	MLG Series / MLG0603S Type
Status	PROD



Size	
Length(L)	0.60mm +/-0.03mm
Width(W)	0.30mm +/-0.03mm
Thickness(T)	0.30mm +/-0.03mm
Recommended Land Pattern (A)	0.25mm Nom.
Recommended Land Pattern (B)	0.30mm Nom.
Recommended Land Pattern (C)	0.30mm Nom.


Electrical Characteristics	
Inductance	110nH +/-5% at 100MHz
Rated Current (Temperature Rise) [Max.]	50mA (20degC Rise)
Self-Resonant Frequency [Min.]	770MHz
Self-Resonant Frequency [Typ.]	940MHz
Q [Min.]	5 at 100MHz
Q [Typ.]	7 at 100MHz
DC Resistance [Nom.]	5.24Ω
DC Resistance [Max.]	6.5Ω

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	15000Pcs Min.
Weight	0.0002g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# MLG0603SR11JT000


**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

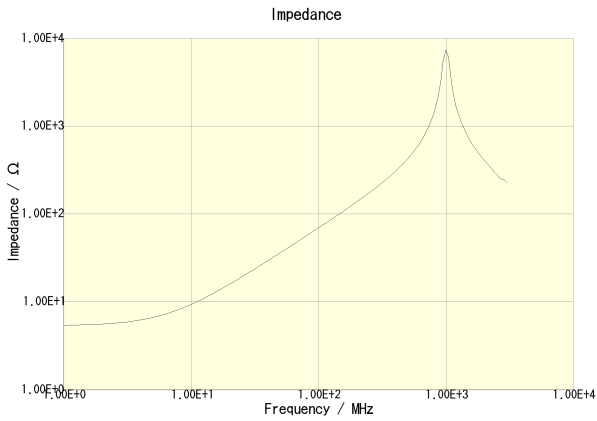


**MLG0603SR11JT000**

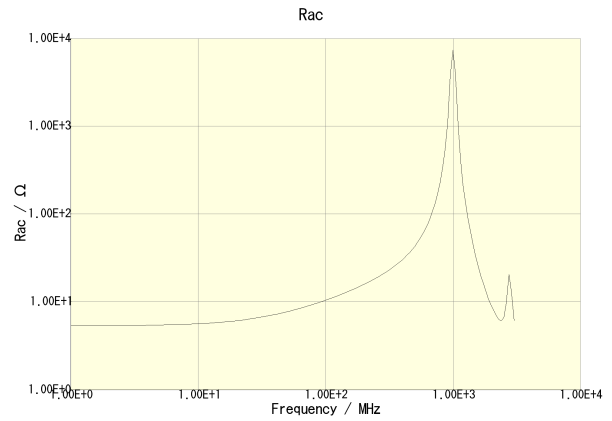

**MLG0603SR11JT000**

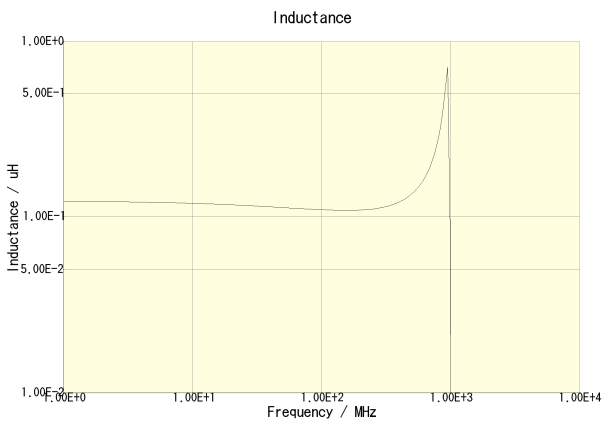

**MLG0603SR11JT000**


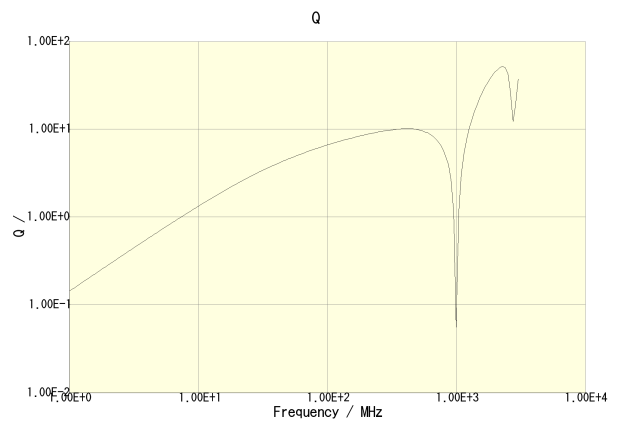


**MLG0603SR11JT000**


- This PDF document was created based on the data listed on the TDK Corporation website.
- All specifications are subject to change without notice.

# MLG0603SR11JT000

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

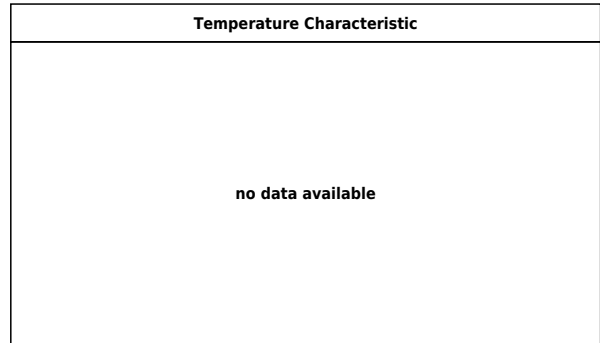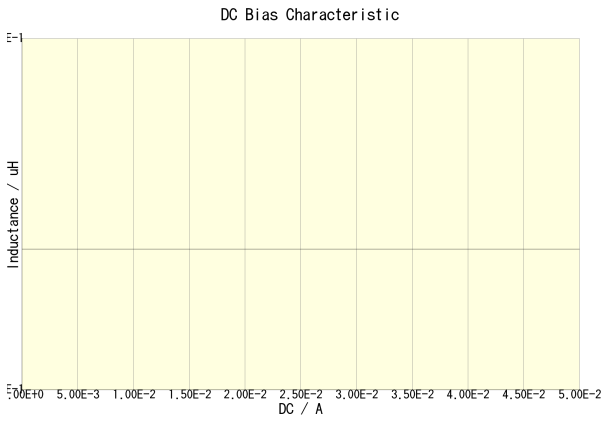

MLG0603SR11JT000(Amb. Temp. = 20degc)

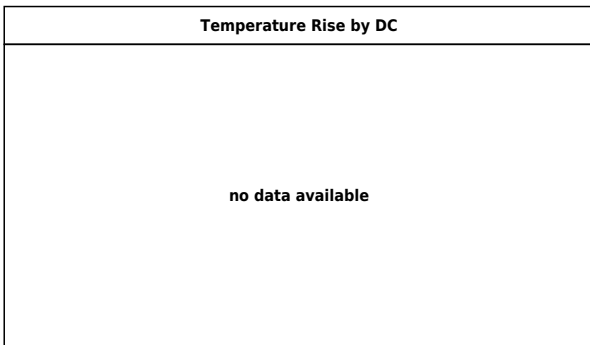

•This PDF document was created based on the data listed on the TDK Corporation website.  
•All specifications are subject to change without notice.