

<b>Applications</b>	Commercial Grade
<b>Feature</b>	No Directivity Wire Wound Ferrite Core
<b>Series   Type</b>	NLCV32-EF
<b>Status</b>	Production
<b>Brand</b>	TDK









Size	
Length(L)	3.20mm ±0.20mm
Width(W)	2.50mm ±0.20mm
Thickness   Height	2.20mm ±0.20mm
Recommended Land Pattern (A)	1.20mm Nom.
Recommended Land Pattern (B)	2.00mm Nom.
Recommended Land Pattern (C)	2.00mm Nom.

Electrical Characteristics	
Inductance	68µH ±10% at 2.52MHz
Rated Current	140mA
DC Resistance [Typ.]	2.8Ω
DC Resistance [Max.]	3.64Ω
Self Resonant Frequency [Min.]	12MHz
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	15 at 2.52MHz

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C
Soldering Method	Wave (Flow) Reflow Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs
Weight	0.05g


! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

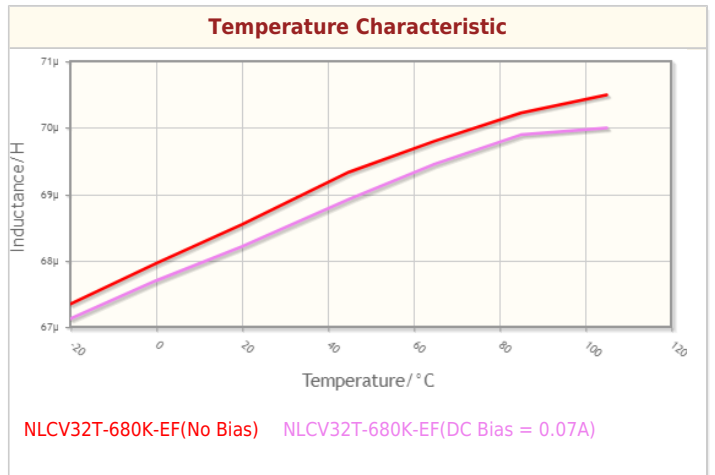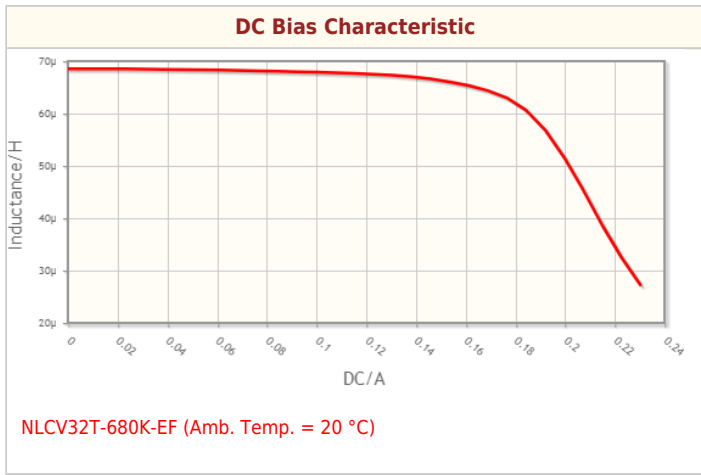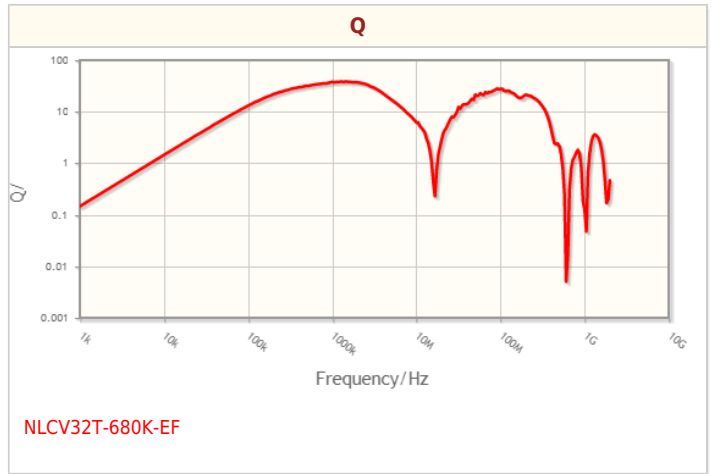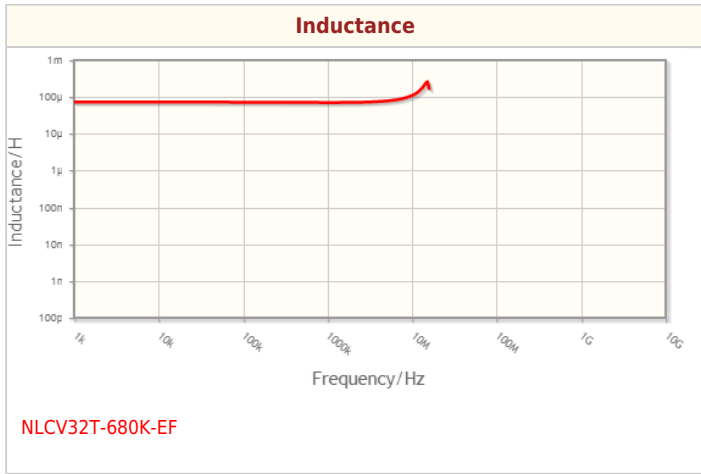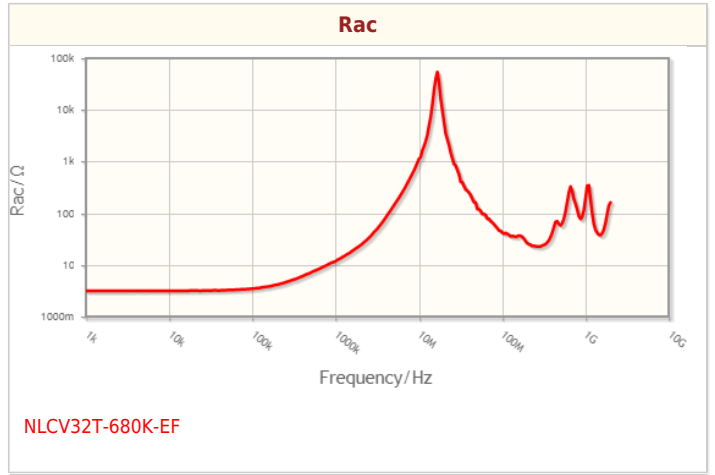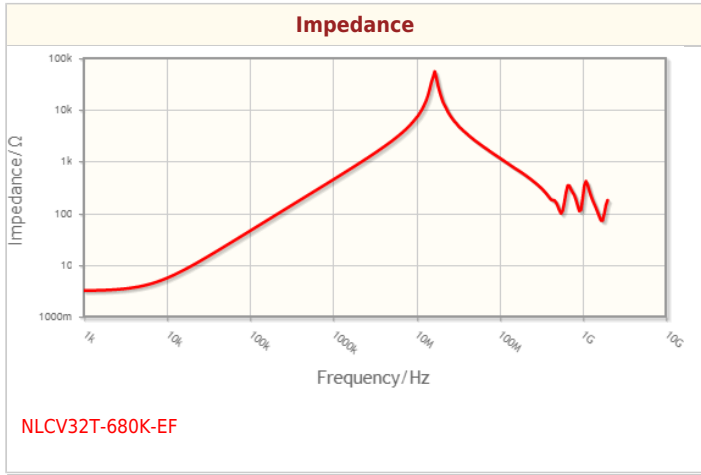

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

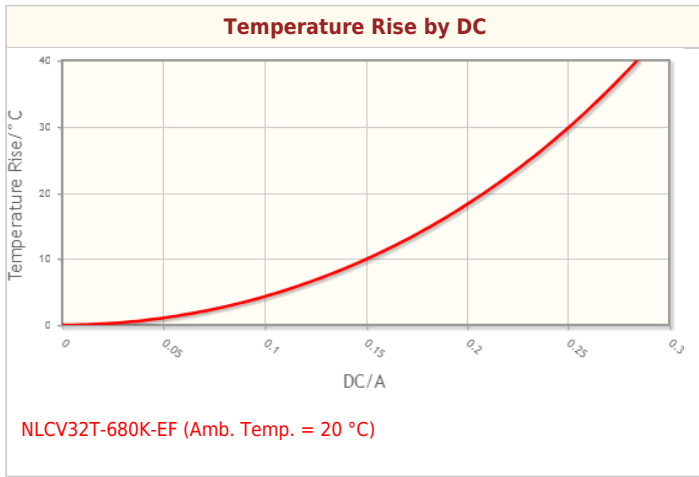

## Associated Images

