

NLC565050T-2R2K-PF

RoHS Reach

Applications	Commercial Grade	
	No Directivity No Directivity	
Feature	Wire Wound	
	Ferrite Core Ferrite Core	
Series Type	NLC565050	
Status	↑ Obsolete	
	Recommended Alternate Part No. : None	
	Discontinue Issue Date : May.21, 2015	
	Last Purchase Order Date : Dec.22, 2016	
	Last Shipment Date : Jun.30, 2017	
Brand	TDK	



	Size	
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics		
Inductance	2.2μH ±10% at 7.96MHz	
Rated Current	1.3A	
DC Resistance [Typ.]		
DC Resistance [Max.]	60mΩ	
Self Resonant Frequency [Min.]	42MHz	
Self Resonant Frequency [Typ.]		
Q [Min.]	10 at 7.96MHz	
Q [Typ.]		

	Other
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C
	Wave (Flow)
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	400pcs
Weight	0.38g

 $^{!\ \}mbox{lmages}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.





Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)




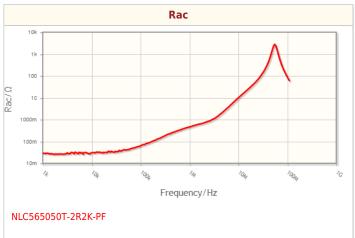

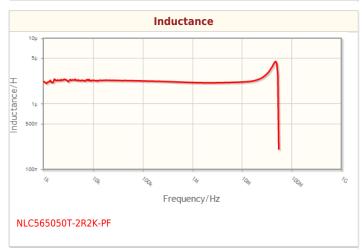

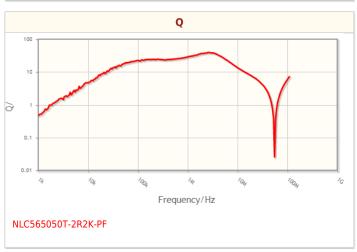

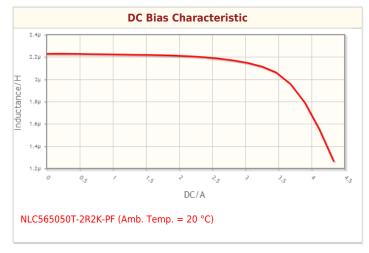


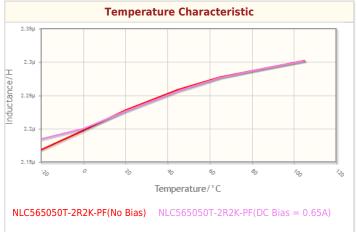

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.




&TDK

NLC565050T-2R2K-PF

RoHS Reach

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.