Chip Beads

MPZ2012S601AT000

RoHS REACH SVHC-Free Halogen Free Lead Free

Applications	Commercial Grade
Feature	Power Power line
Series	MPZ
Status	Production



Images are for reference only and show example products.

Buy Now
PDF file of this page
Contact

Documents
Catalog
RoHS Certificate
SVHC / REACH Certificate
Product Lineup
Selection Guide
Sample Kits

Technical Support Tools
S-parameter
SPICE Netlist (Simple)
SPICE Netlist (Precision)
Equivalent Circuit Model

Size

Length(L)	2.00mm ±0.20mm
Width(W)	1.25mm ±0.20mm
Thickness(T)	0.85mm ±0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics

Impedance at 100MHz	600Ω ±25%
Rated Current	2A
DC Resistance (Max.)	100mΩ

Other

Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Reflow Iron Soldering
AEC-Q200	NO
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]
Package Quantity	4000pcs
Weight	0.008g

Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

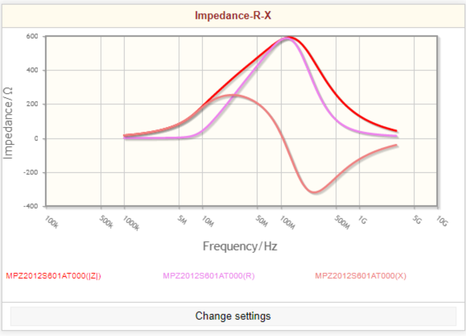

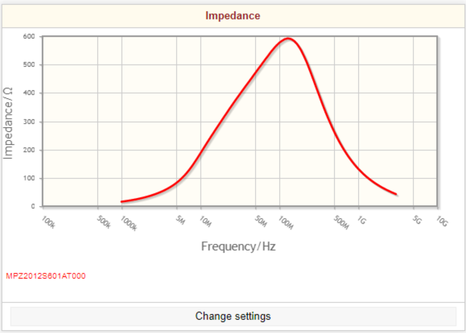

Copyright(c) 2021 TDK Corporation. All rights reserved.
TDK logo is a trademark or registered trademark of TDK Corporation.
Downloaded from Arrow.com.