
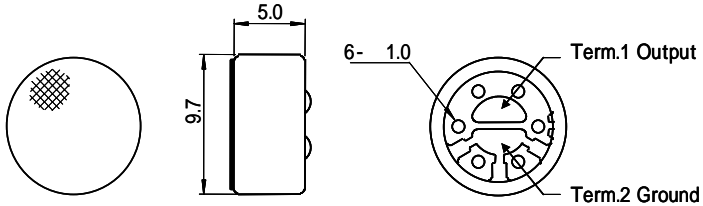
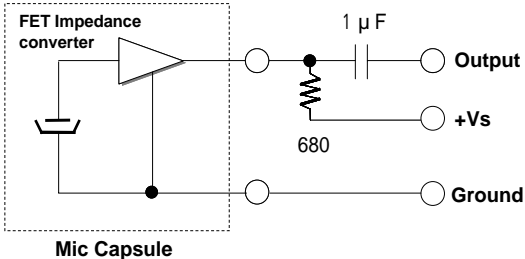
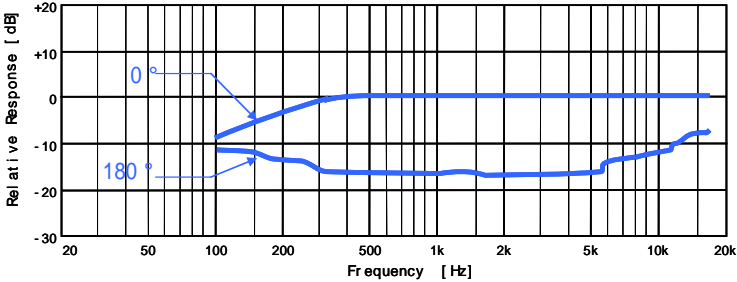


Unidirectional Back Electret Condenser Microphone Cartridge

WM-55A103

Unidirectional microphone for general use
Suited to Hi-Fi sound and playback systems

<p>Appearance</p> 	<p>Dimensional Drawing Unit : mm</p> 				
<p>Schematic Diagram</p> 	<p>Typical Frequency Response Curve</p> 				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Sensitivity (0dB=1V/Pa, 1kHz)</td> <td style="width: 30%;"><u>Sensitivity</u> -47+/- -4dB</td> <td style="width: 30%;"><u>Model No.</u> WM-55A103</td> <td style="width: 10%; text-align: center; border: 1px solid black; border-radius: 10px; padding: 5px;"> Vs=1.5V RL=680 </td> </tr> </table>		Sensitivity (0dB=1V/Pa, 1kHz)	<u>Sensitivity</u> -47+/- -4dB	<u>Model No.</u> WM-55A103	Vs=1.5V RL=680
Sensitivity (0dB=1V/Pa, 1kHz)	<u>Sensitivity</u> -47+/- -4dB	<u>Model No.</u> WM-55A103	Vs=1.5V RL=680		

Specifications

Dimensions	9.7 x 5.0 mm
Impedance	Less than 680
Frequency	Unidirectional (Cardioid)
Max operation voltage	100-12,000Hz
Standard operation voltage	10V
Current consumption	1.5V
Sensitivity reduction	Max 0.5mA
S/N ratio	Within -3dB at 1V
	More than 60dB

Specifications are subject to change without notice.