


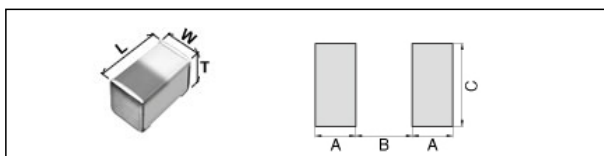


MHQ0603P1N1ST000

Applications		Commercial Grade
Feature		Multilayer
		Non-Magnetic Core (Dielectric Ceramic)
Series	MHQ-P Series / MHQ0603P Type	
Status	Production	




Size	
Length(L)	0.65mm +/-0.05mm
Width(W)	0.35mm +/-0.05mm
Thickness(T)	0.35mm +/-0.05mm
Recommended Land Pattern (A)	0.25mm Nom.
Recommended Land Pattern (B)	0.30mm Nom.
Recommended Land Pattern (C)	0.30mm Nom.

Electrical Characteristics	
Inductance	1.1nH +/-0.3nH at 500MHz
Rated Current (Temperature Rise) [Max.]	1A (20degC Rise)
Self-Resonant Frequency [Min.]	10GHz
Self-Resonant Frequency [Typ.]	19.3GHz
Q [Min.]	
Q [Typ.]	
DC Resistance [Nom.]	30mΩ
DC Resistance [Max.]	70mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	15000Pcs Min.
Weight	0.0002g

MHQ0603P1N1ST000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

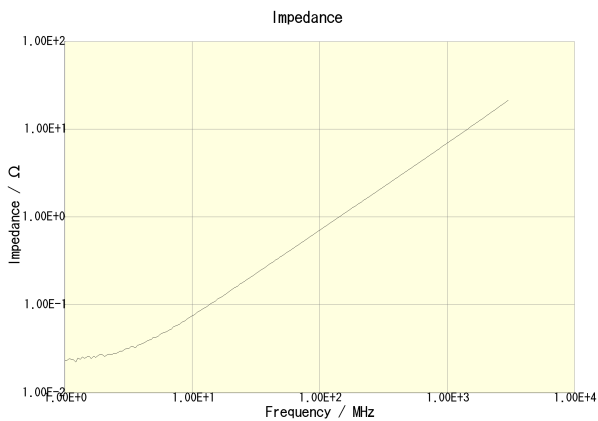


MHQ0603P1N1ST000

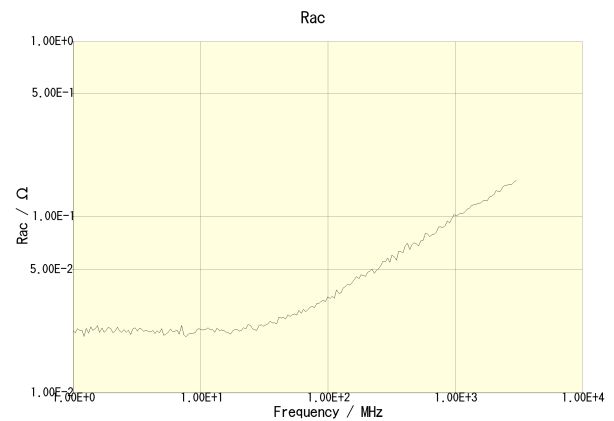

MHQ0603P1N1ST000

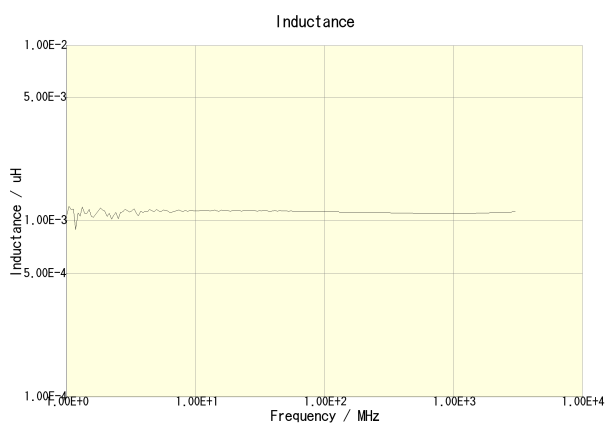



MHQ0603P1N1ST000

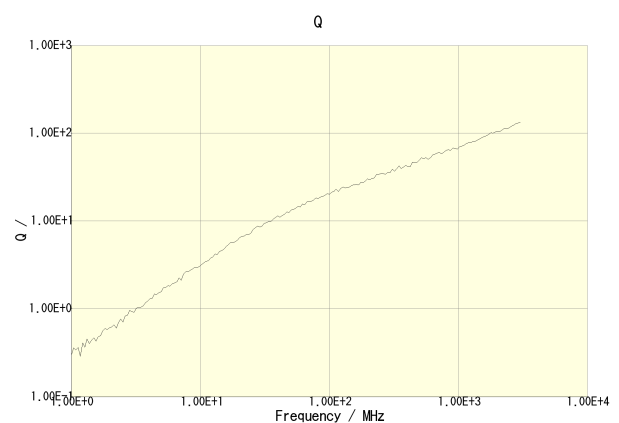


MHQ0603P1N1ST000

MHQ0603P1N1ST000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

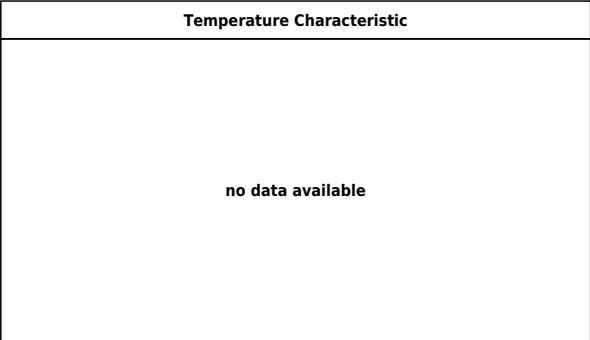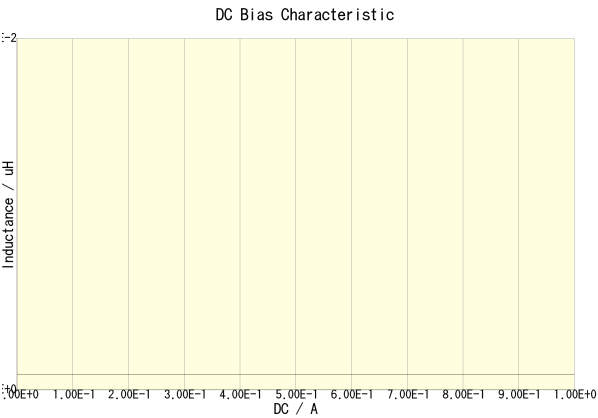

MHQ0603P1N1ST000(Amb. Temp. = 20degc)

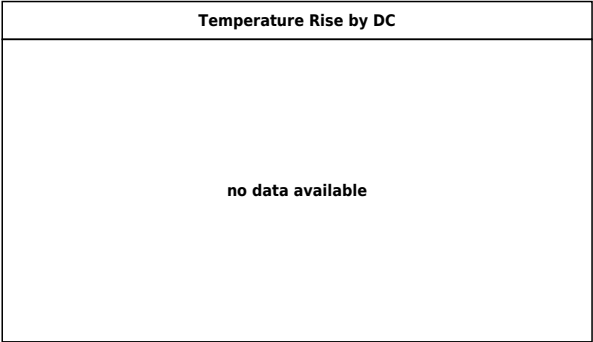

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.