

# CKCM25JB1E103M060AA

TDK Item Description : CKCM25JB1E103MT\*\*\*\*




## Application & Main Feature

Commercial Grade ( 2 in 1 Array )

## Series

CKCM25

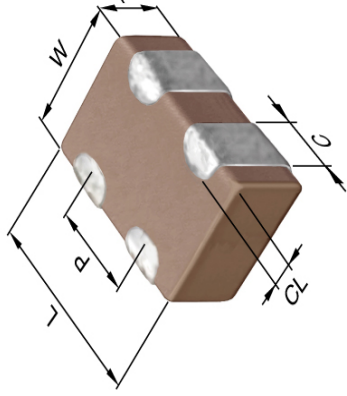

## Dimensions

|   |        |           |
|---|--------|-----------|
| L | 1.37mm | +/-0.15mm |
| W | 1.00mm | +/-0.15mm |
| T | 0.60mm | +/-0.1mm  |
| C | 0.36mm | Nom.      |
| P | 0.64mm | Nom.      |

## Temperature Characteristic

JB (-25 to 85 degC +/-10%)

## Rated Voltage

1E (25Vdc)

## Capacitance

10nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


## DC Bias Characteristic

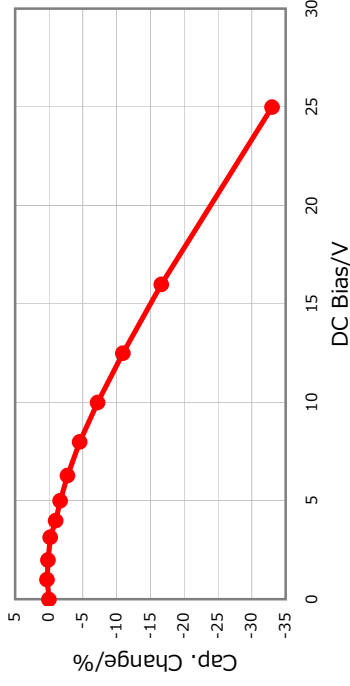


## |Z|, ESR vs. Freq. Characteristics

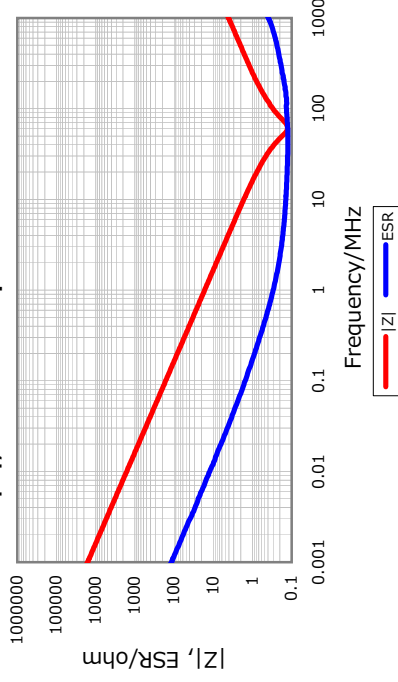


## Cap. vs. Freq. Characteristic

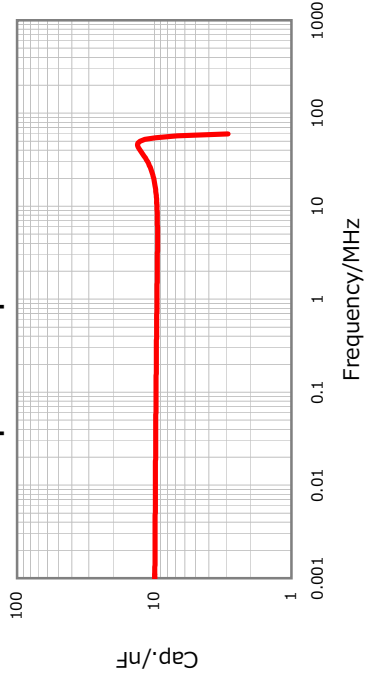

## Temperature Characteristics

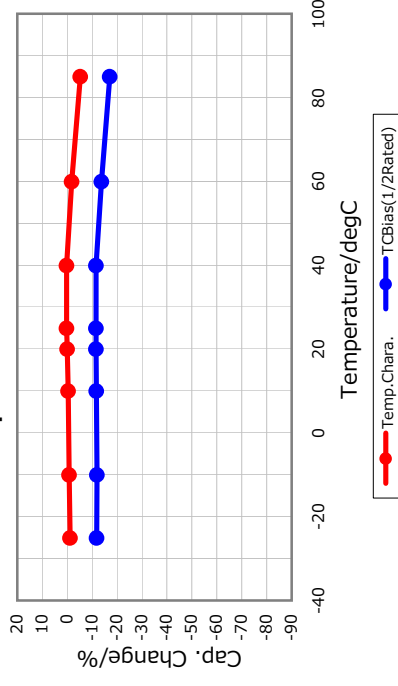

## Ripple Temperature Rise Characteristics

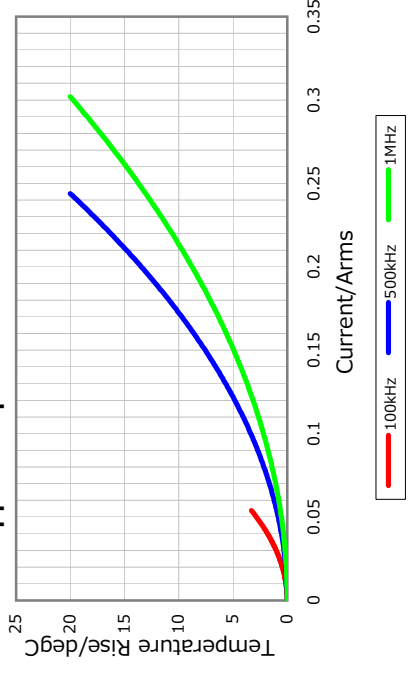

All specifications are subject to change without notice.

January 4, 2016