


CKCM25X5R1A473M060AA



TDK item description CKCM25X5R1A473MT****

Applications	Commercial Grade
Feature	2 in 1 Array
Series	CKCM25
Status	Obsolete Discontinue Issue Date : Apr.28, 2018 Last Purchase Order Date : Oct.31, 2018 Last Shipment Date : Mar.31, 2019



Size	
Length(L)	1.37mm ±0.15mm
Width(W)	1.00mm ±0.15mm
Thickness(T)	0.60mm ±0.10mm
Terminal Width(C)	0.36mm Nom.
Terminal Spacing(P)	0.64mm Nom.
Recommended Land Pattern (PA)	0.45mm to 0.55mm
Recommended Land Pattern (PB)	0.45mm to 0.55mm
Recommended Land Pattern (PC)	0.31mm to 0.41mm
Recommended Land Pattern (PP)	0.59mm to 0.69mm

Electrical Characteristics	
Capacitance	47nF ±20%
Rated Voltage	10VDC
Temperature Characteristic	X5R(±15%)
Dissipation Factor (Max.)	5%
Insulation Resistance (Min.)	2127MΩ







Other	
Soldering Method	Reflow
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs

! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.

CKCM25X5R1A473M060AA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

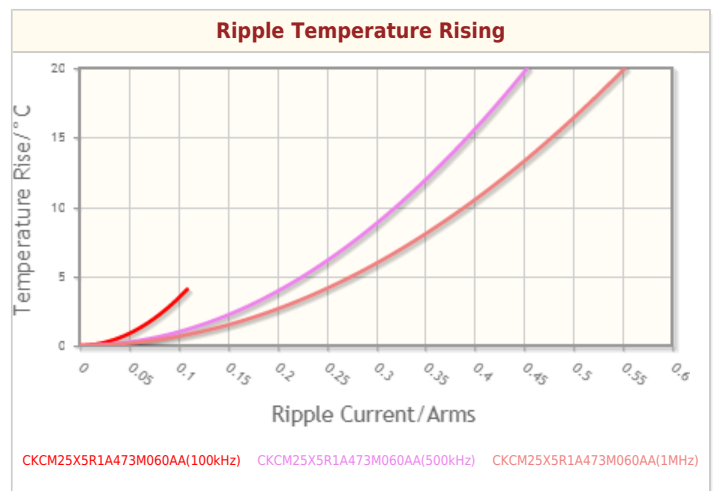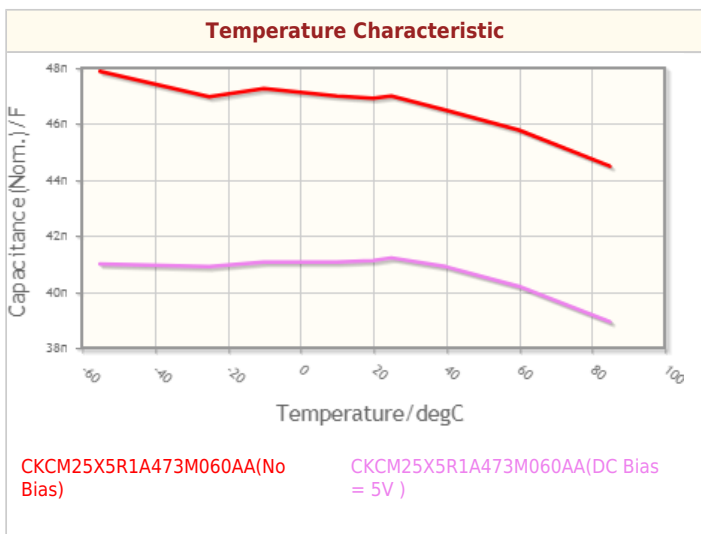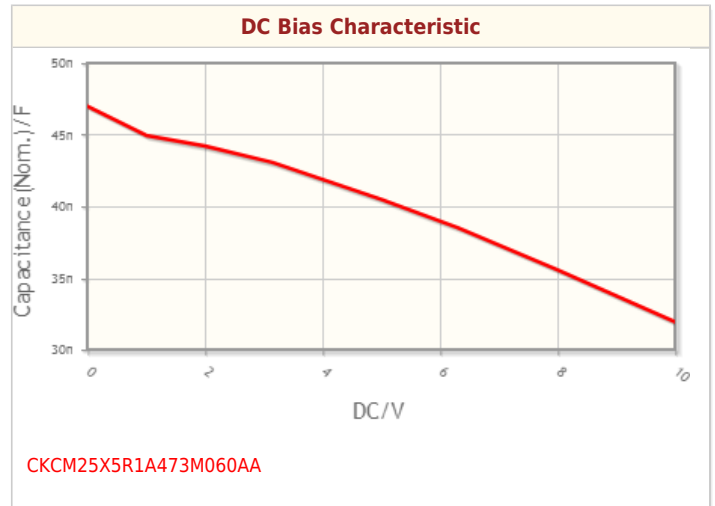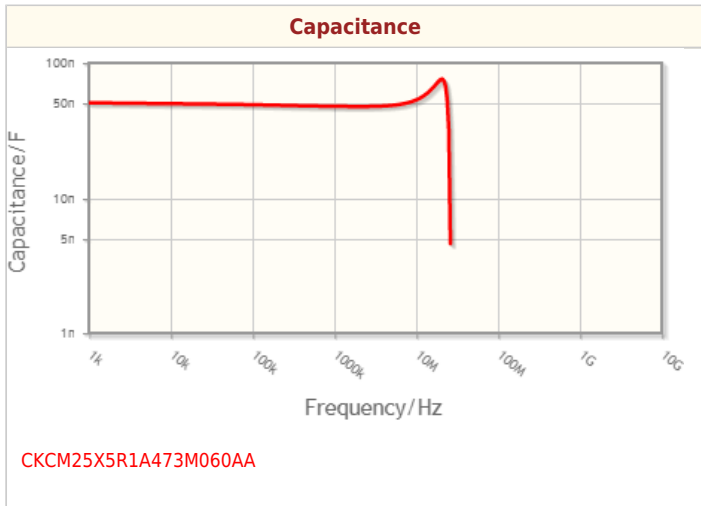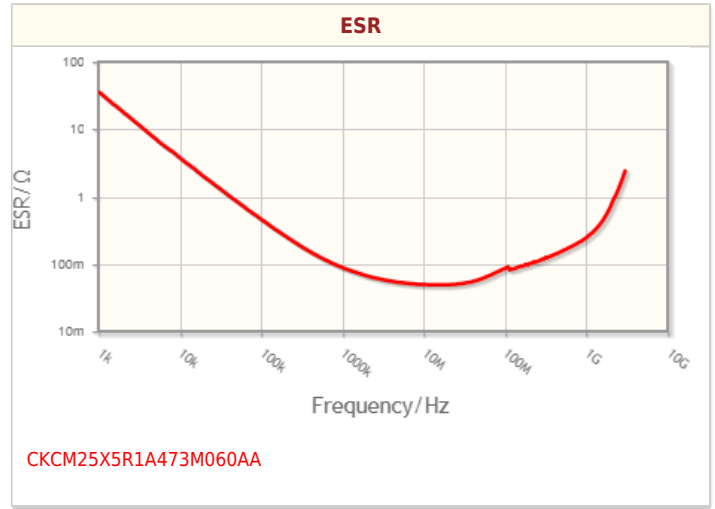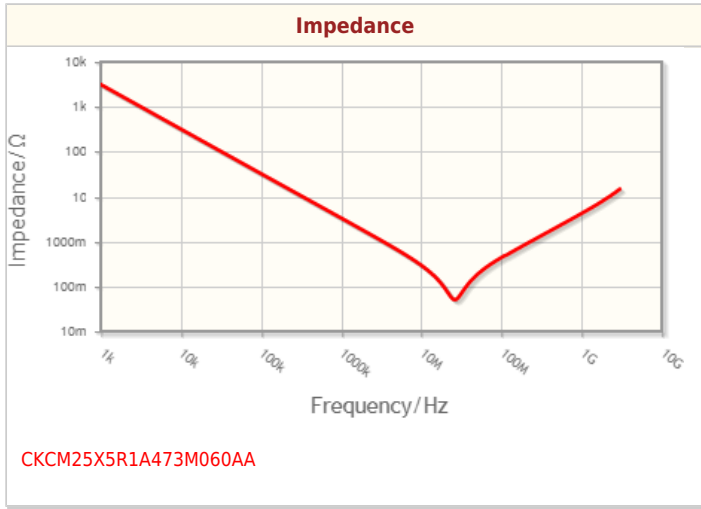


! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

CKCM25X5R1A473M060AA



Associated Images

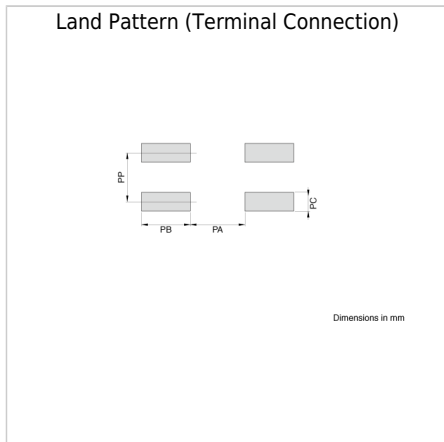

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.