

FEATURES

OP1dB: 18 dBm (typical at 7 GHz to 12 GHz)

P_{SAT}: 22 dBm (typical at 7 GHz to 12 GHz)

Gain: 12 dB (typical at 7 GHz to 12 GHz)

OIP3: 30 dBm typical

Phase noise: -172 dBc/Hz at 10 kHz offset

Supply voltage: 5 V at 74 mA

6-lead, 2 mm × 2 mm LFCSP

APPLICATIONS

Military and space

Test instrumentation

Communications

GENERAL DESCRIPTION

The ADL8150 is a self biased gallium arsenide (GaAs), monolithic microwave integrated circuit (MMIC), heterojunction bipolar transistor (HBT), low phase noise amplifier that operates from 6 GHz to 14 GHz. The amplifier provides 12 dB of typical signal gain, 18 dBm output power at 1 dB gain compression (OP1dB), and a typical output third-order intercept (OIP3) of 30 dBm. The amplifier requires 74 mA from a 5 V collector

FUNCTIONAL BLOCK DIAGRAM




Figure 1.

supply voltage. The ADL8150 also features inputs and outputs (I/Os) that are internally matched to 50 Ω , and facilitates integration into multichip modules (MCMs).

Note that throughout this data sheet, multifunction pins, such as RF_{OUT}/V_{CC}, are referred to either by the entire pin name or by a single function of the pin, for example, RF_{OUT}, when only that function is relevant.

Rev. 0

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.

Tel: 781.329.4700

[Technical Support](#)

©2020 Analog Devices, Inc. All rights reserved.

www.analog.com

TABLE OF CONTENTS

Features	1	Electrostatic Discharge (ESD) Ratings	5
Applications	1	ESD Caution.....	5
Functional Block Diagram	1	Pin Configuration and Function Descriptions.....	6
General Description	1	Interface Schematics	6
Revision History	2	Typical Performance Characteristics	7
Specifications.....	3	Theory of Operation	13
Frequency Range: 6 GHz to 7 GHz.....	3	Applications Information.....	14
Frequency Range: 7 GHz to 12 GHz.....	3	Biasing Procedures.....	14
Frequency Range: 12 GHz to 14 GHz.....	4	Outline Dimensions	15
Absolute Maximum Ratings.....	5	Ordering Guide	15
Thermal Resistance	5		

REVISION HISTORY

10/2020—Revision 0: Initial Version

SPECIFICATIONS

FREQUENCY RANGE: 6 GHz TO 7 GHz

Collector bias voltage (V_{CC}) = 5 V, supply current (I_{CQ}) = 74 mA and T_A = 25°C, unless otherwise noted.

Table 1.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE	6		7	GHz	
GAIN	8	10.5		dB	
Gain Flatness		±1.0		dB	
Gain Variation over Temperature		0.033		dB/°C	
NOISE FIGURE		4.8		dB	
PHASE NOISE		–172		dBc/Hz	Measurement taken at 10 kHz offset from carrier
RETURN LOSS					
Input		2		dB	
Output		14		dB	
OUTPUT					
OP1dB	15.5	17.5		dBm	
Saturated Output Power (P_{SAT})		20.5		dBm	
OIP3		30		dBm	Measurement taken at output power (P_{OUT}) per tone = 6 dBm
Output Second-Order Intercept (OIP2)		32		dBm	Measurement taken at P_{OUT} per tone = 6 dBm
SUPPLY					
I_{CQ}		74		mA	Self biased
V_{CC}	3	5	6	V	

FREQUENCY RANGE: 7 GHz TO 12 GHz

V_{CC} = 5 V, I_{CQ} = 74 mA and T_A = 25°C, unless otherwise noted.

Table 2.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE	7		12	GHz	
GAIN	10	12		dB	
Gain Flatness		±0.5		dB	
Gain Variation over Temperature		0.024		dB/°C	
NOISE FIGURE		3.6		dB	
PHASE NOISE		–172		dBc/Hz	Measurement taken at 10 kHz offset from carrier
RETURN LOSS					
Input		7.5		dB	
Output		8		dB	
OUTPUT					
OP1dB	16	18		dBm	
P_{SAT}		22		dBm	
OIP3		30		dBm	Measurement taken at P_{OUT} per tone = 6 dBm
OIP2		44.5		dBm	Measurement taken at P_{OUT} per tone = 6 dBm
SUPPLY					
I_{CQ}		74		mA	Self biased
V_{CC}	3	5	6	V	

FREQUENCY RANGE: 12 GHz TO 14 GHz

$V_{CC} = 5\text{ V}$, $I_{CQ} = 74\text{ mA}$ and $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 3.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE	12		14	GHz	
GAIN	8	10.5		dB	
Gain Flatness		± 0.9		dB	
Gain Variation over Temperature		0.034		dB/ $^\circ\text{C}$	
NOISE FIGURE		3.8		dB	
PHASE NOISE		-172		dBc/Hz	Measurement taken at 10 kHz offset from carrier
RETURN LOSS					
Input		5		dB	
Output		8		dB	
OUTPUT					
OP1dB	15.5	17.5		dBm	
P_{SAT}		21.5		dBm	
OIP3		30		dBm	Measurement taken at P_{OUT} per tone = 6 dBm
OIP2		60			Measurement taken at P_{OUT} per tone = 6 dBm
SUPPLY					
I_{CQ}		74		mA	Self biased
V_{CC}	3	5	6	V	

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Collector Bias Voltage (V_{CC})	6.5 V
Radio Frequency Input (RF_{IN}) Power	25 dBm
Continuous Power Dissipation (P_{DISS}), $T_A = 85^\circ\text{C}$ (Derate 15.9 mW/ $^\circ\text{C}$ Above 85°C)	0.843 W
Temperature	
Storage Range	-65°C to $+150^\circ\text{C}$
Operating Range	-40°C to $+85^\circ\text{C}$
Peak Reflow (Moisture Sensitivity Level (MSL)) ¹	260°C
Junction Temperature to Maintain 1,000,000 Hours Mean Time to Failure (MTTF)	138°C
Nominal Junction Temperature ($T_A = 85^\circ\text{C}$, $V_{CC} = 5\text{ V}$, $I_{CQ} = 74\text{ mA}$)	108.3°C

¹ See the Ordering Guide for more information.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Careful attention to PCB thermal design is required.

θ_{JC} is the junction to case thermal resistance.

Table 5. Thermal Resistance

Package Type	θ_{JC}	Unit
CP-6-12	62.9	$^\circ\text{C}/\text{W}$

ELECTROSTATIC DISCHARGE (ESD) RATINGS

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

Human body model (HBM) per ANSI/ESDA/JEDEC JS-001.

ESD Ratings for ADL8150

Table 6. ADL8150, 6-Lead LFCSP

ESD Model	Withstand Threshold (V)	Class
HBM	± 1000	1C

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




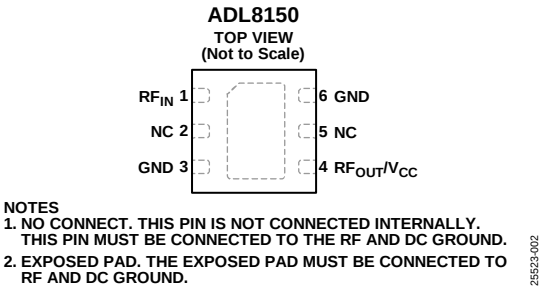


Figure 2. Pin Configuration

Table 7. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	RF _{IN}	RF Input. This pin is ac-coupled and matched to 50 Ω. See Figure 5 for the interface schematic.
2, 5	NC	No Connect. This pin is not connected internally. This pin must be connected to the RF and dc ground.
3, 6	GND	Ground. This pin must be connected to the RF and dc ground. See Figure 3 for the interface schematic.
4	RF _{OUT} /V _{CC}	RF Output/Collector Bias for Amplifier. This pin is dc-coupled and matched to 50 Ω. See Figure 4 for the interface schematic.
	EPAD	Exposed Pad. The exposed pad must be connected to RF and dc ground.

INTERFACE SCHEMATICS



TYPICAL PERFORMANCE CHARACTERISTICS

I_{CQ} is the collector current without RF signal applied, and I_{CC} is the collector current with RF signal applied.

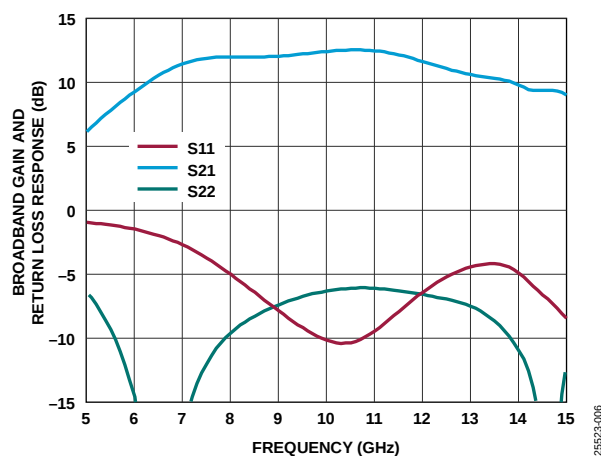


Figure 6. Broadband Gain and Return Loss Response vs. Frequency

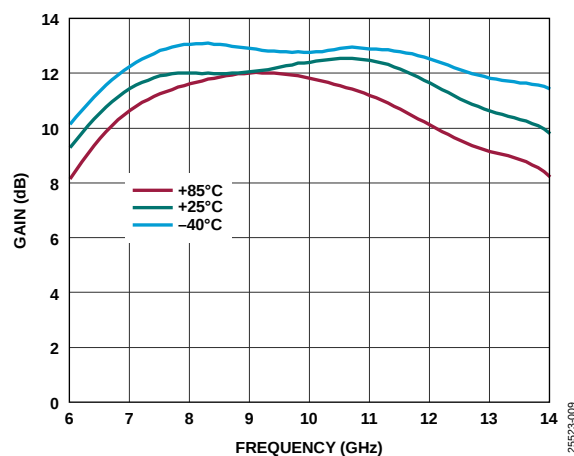


Figure 9. Gain vs. Frequency for Various Temperatures

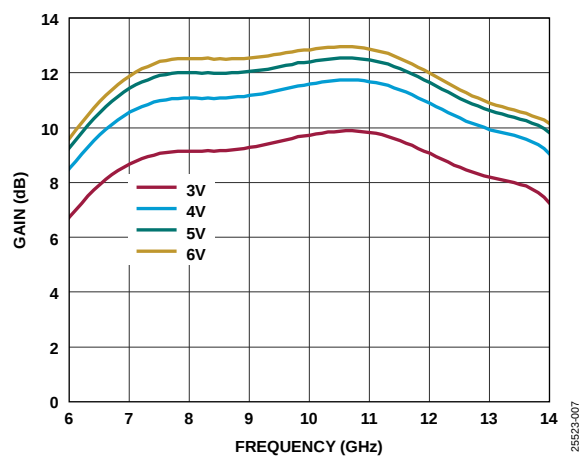


Figure 7. Gain vs. Frequency for Various Supply Voltages

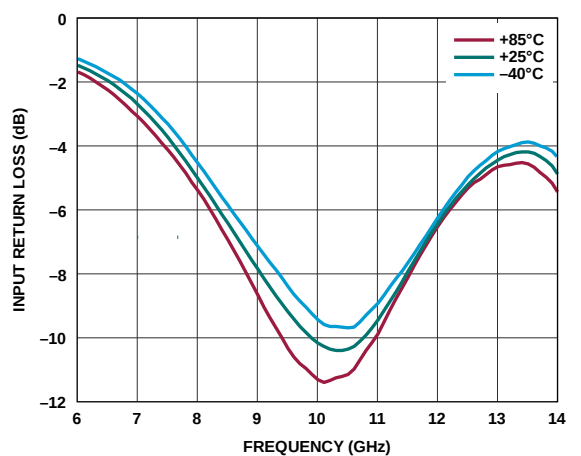


Figure 10. Input Return Loss vs. Frequency for Various Temperatures

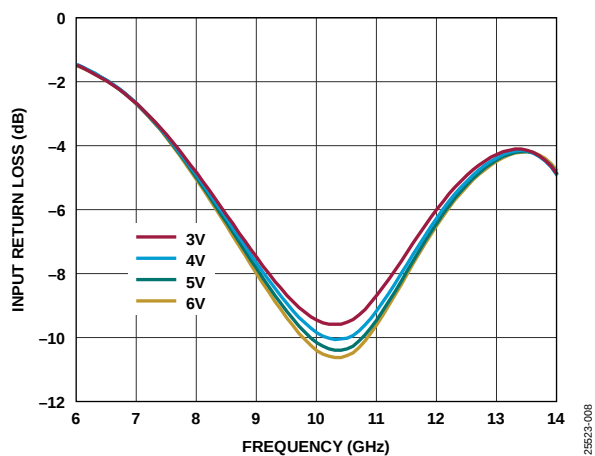


Figure 8. Input Return Loss vs. Frequency for Various Supply Voltages

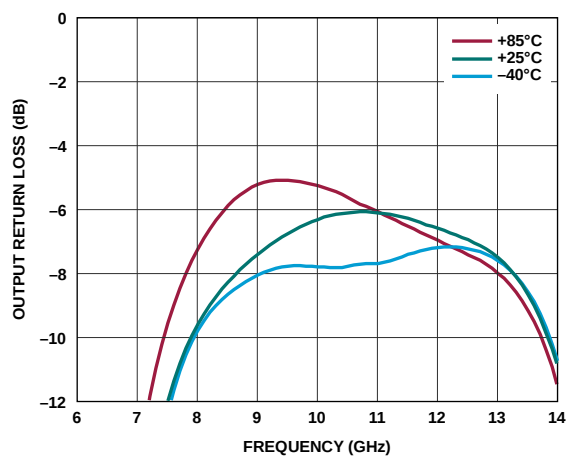


Figure 11. Output Return Loss vs. Frequency for Various Temperatures

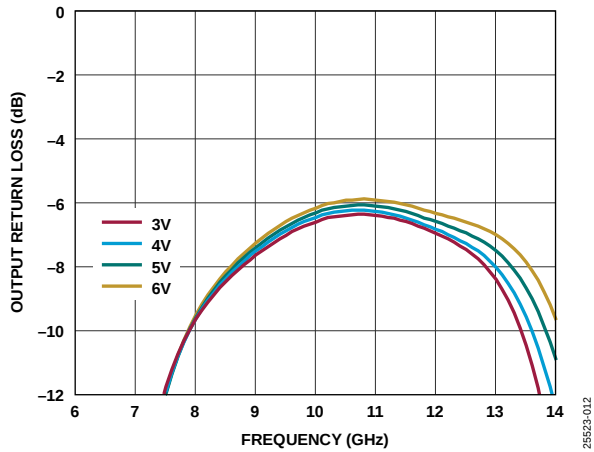


Figure 12. Output Return Loss vs. Frequency for Various Supply Voltages

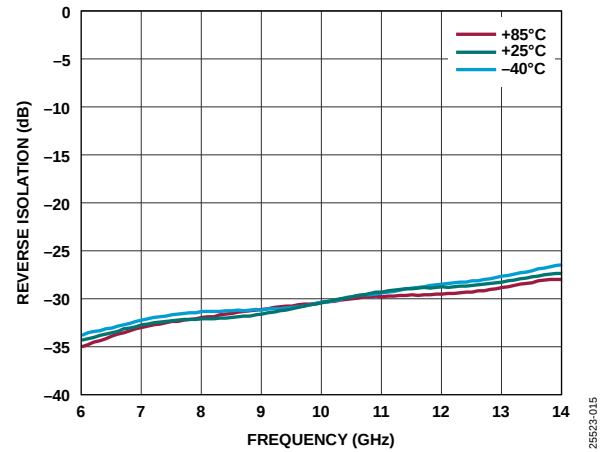


Figure 15. Reverse Isolation vs. Frequency for Various Temperatures

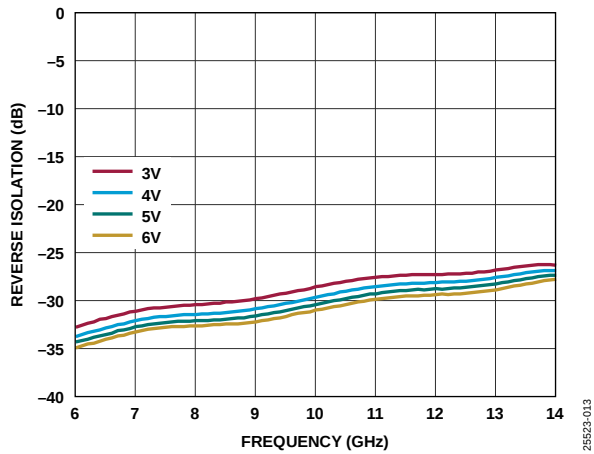


Figure 13. Reverse Isolation vs. Frequency for Various Supply Voltages

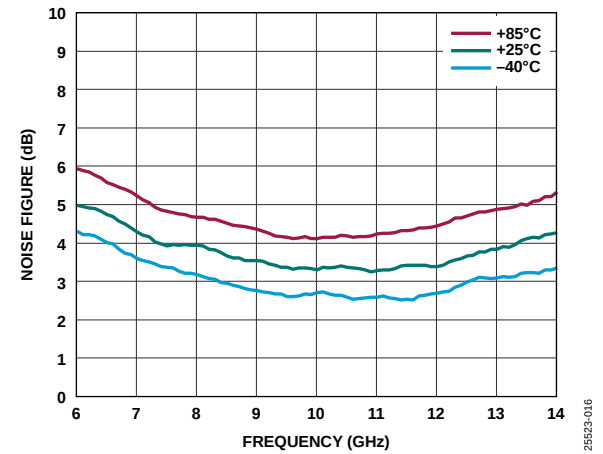


Figure 16. Noise Figure vs. Frequency for Various Temperatures

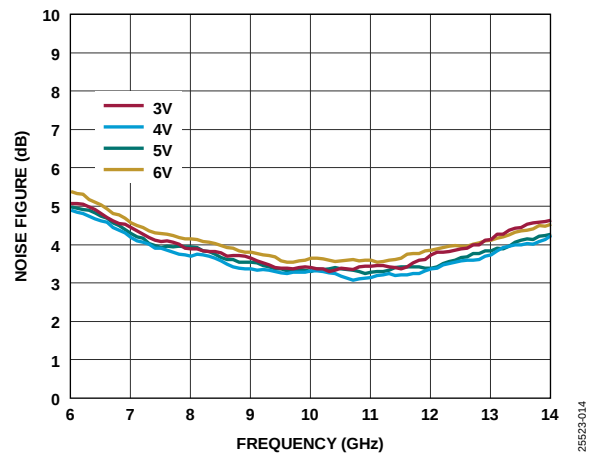


Figure 14. Noise Figure vs. Frequency for Various Supply Voltages

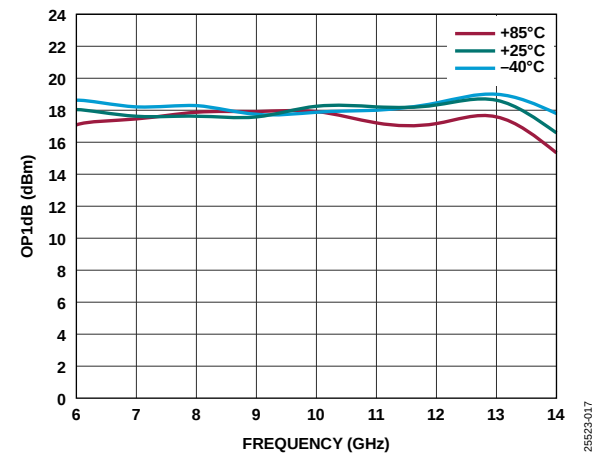


Figure 17. OP1dB vs. Frequency for Various Temperatures

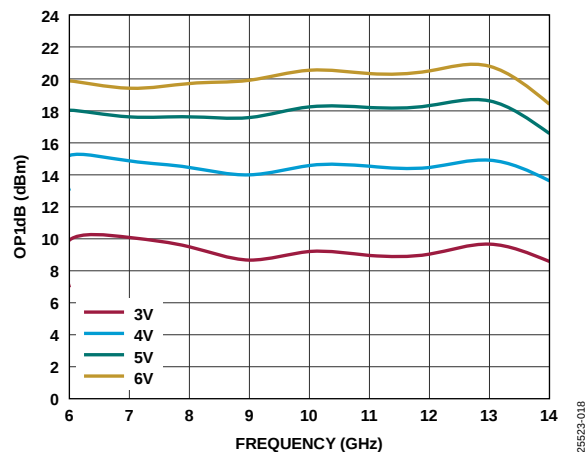
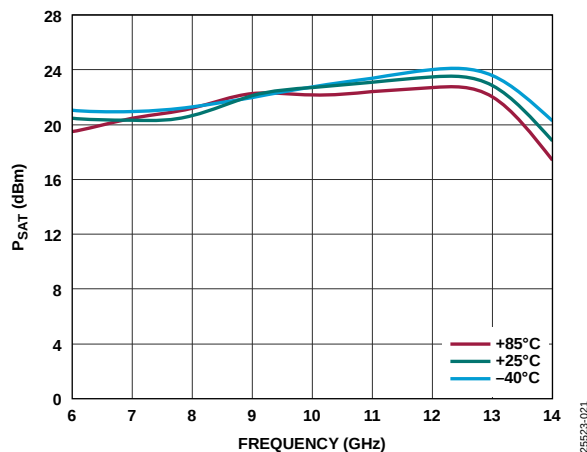
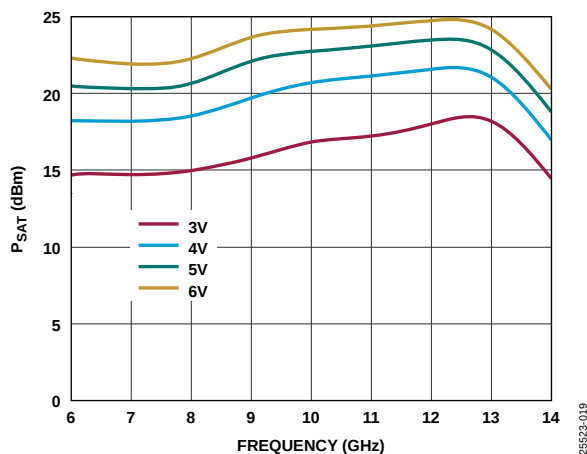
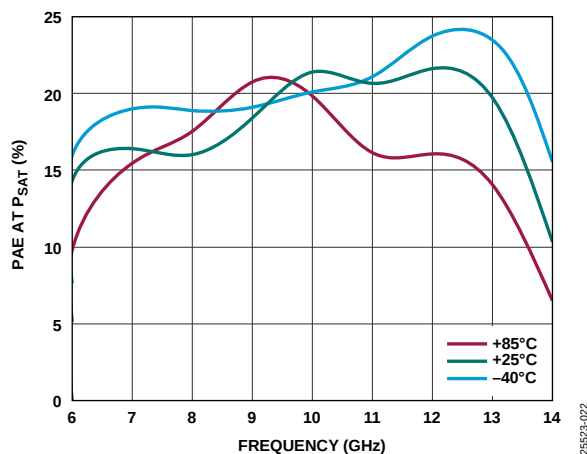
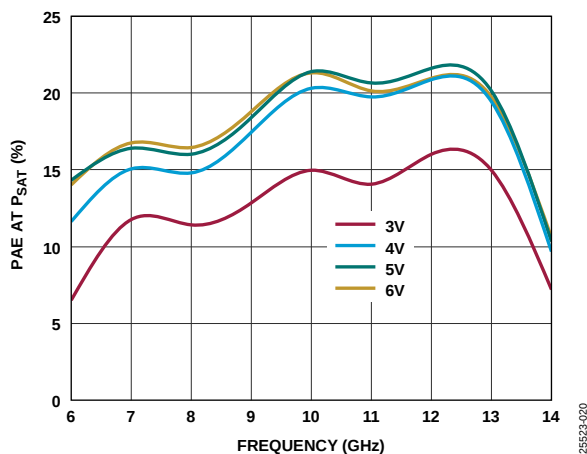
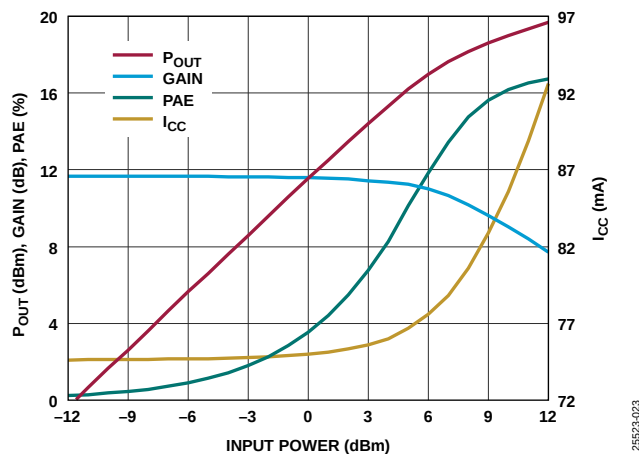
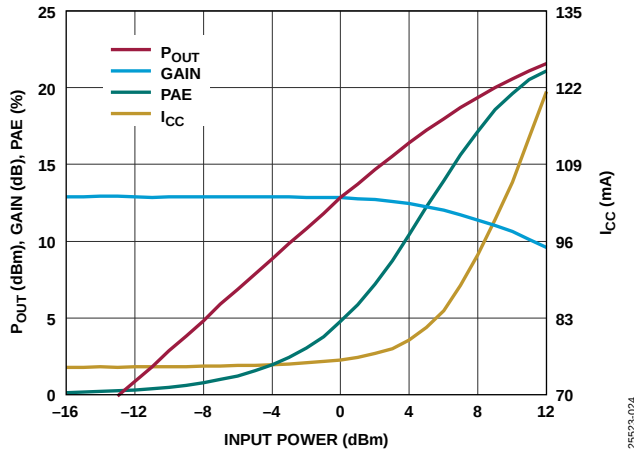
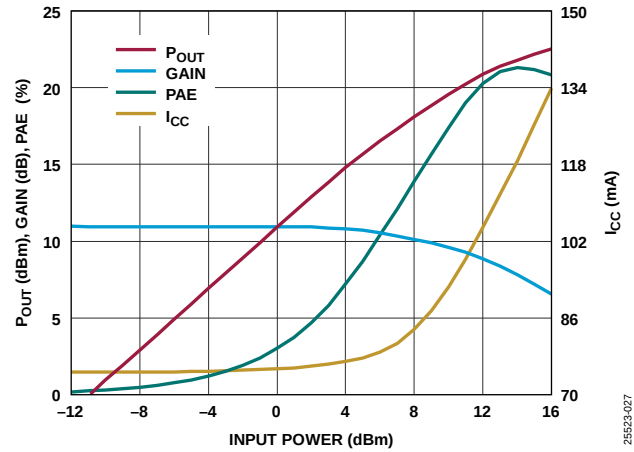
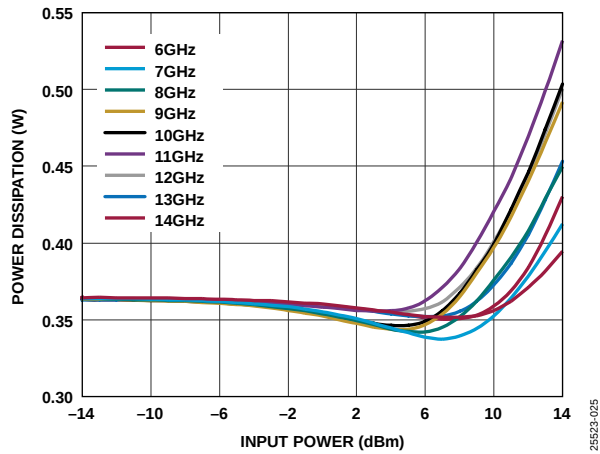
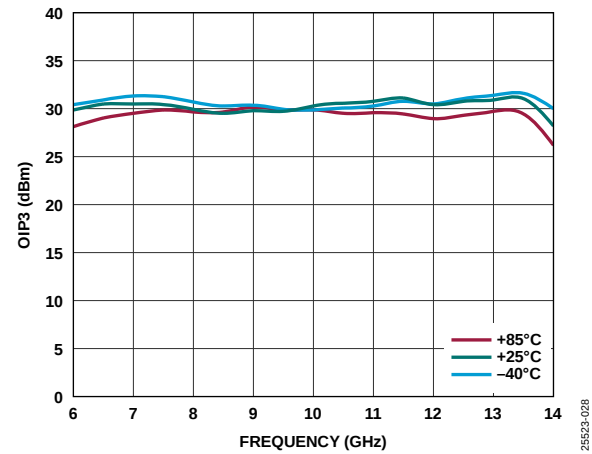
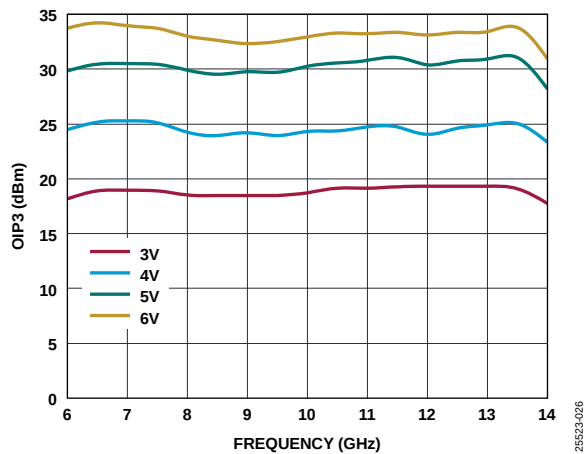
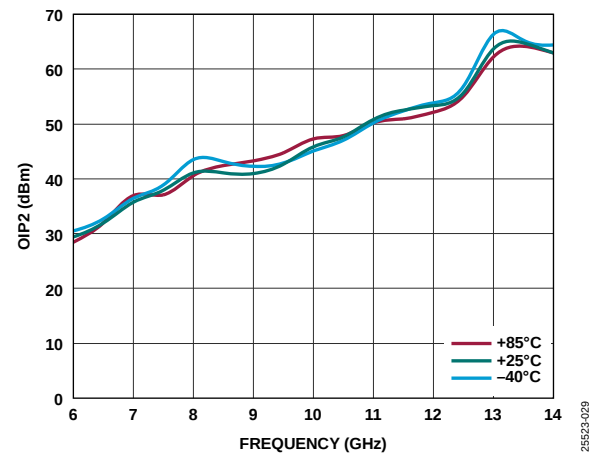


Figure 18. OP1dB vs. Frequency for Various Supply Voltages

Figure 21. P_{SAT} vs. Frequency for Various TemperaturesFigure 19. P_{SAT} vs. Frequency for Various Supply VoltagesFigure 22. PAE at P_{SAT} vs. Frequency for Various TemperaturesFigure 20. PAE at P_{SAT} vs. Frequency for Various Supply VoltagesFigure 23. P_{OUT}, Gain, PAE, and I_{CC} vs. Input Power, Frequency = 7 GHz

Figure 24. P_{OUT} , Gain, PAE, and I_{CC} vs. Input Power, Frequency = 10 GHzFigure 27. P_{OUT} , Gain, PAE, and I_{CC} vs. Input Power, Frequency = 13 GHzFigure 25. Power Dissipation vs. Input Power for Various Frequencies, $T_A = 85^\circ\text{C}$ Figure 28. $OIP3$ vs. Frequency for Various Temperatures, P_{OUT} per Tone = 6 dBm, $V_{CC} = 5\text{ V}$ Figure 26. $OIP3$ vs. Frequency for Various Supply Voltages, P_{OUT} per Tone = 6 dBm, $V_{CC} = 5\text{ V}$ Figure 29. $OIP2$ vs. Frequency for Various Temperatures, P_{OUT} per Tone = 6 dBm, $V_{CC} = 5\text{ V}$

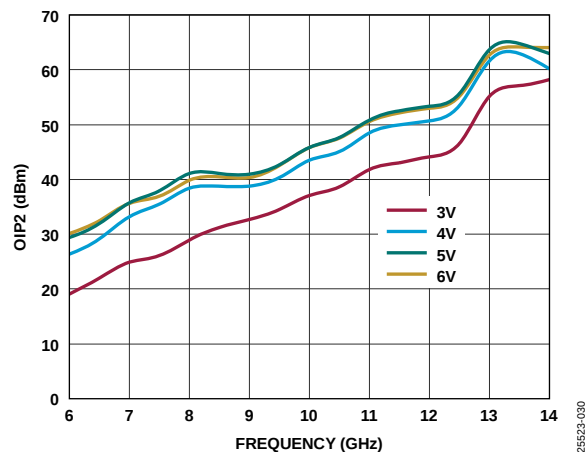


Figure 30. OIP2 vs. Frequency for Various Supply Voltages, P_{OUT} per Tone = 6 dBm, $V_{CC} = 5$ V

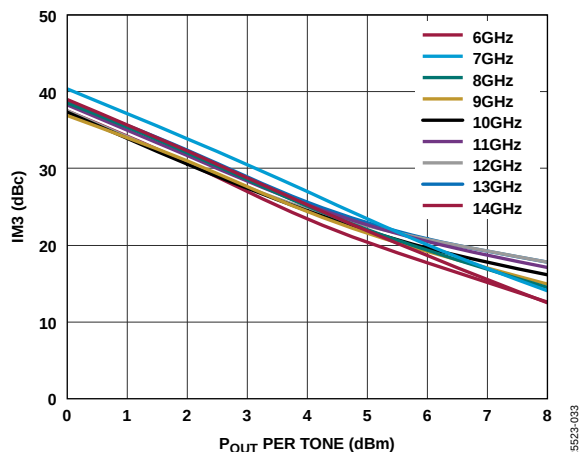


Figure 33. IM3 vs. P_{OUT} per Tone for Various Frequencies at $V_{CC} = 3$ V

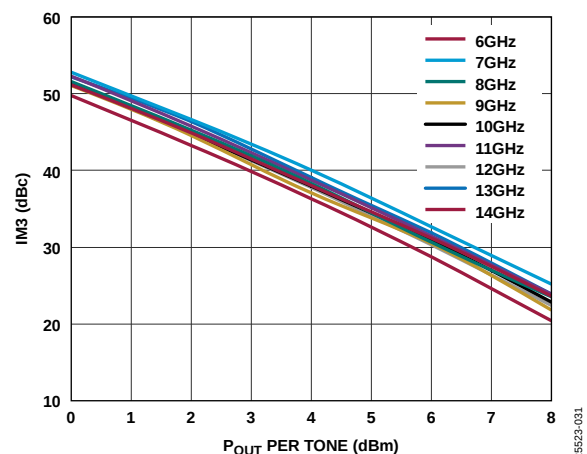


Figure 31. Third-Order Intermodulation Distortion (IM3) vs. P_{OUT} per Tone for Various Frequencies at $V_{CC} = 4$ V

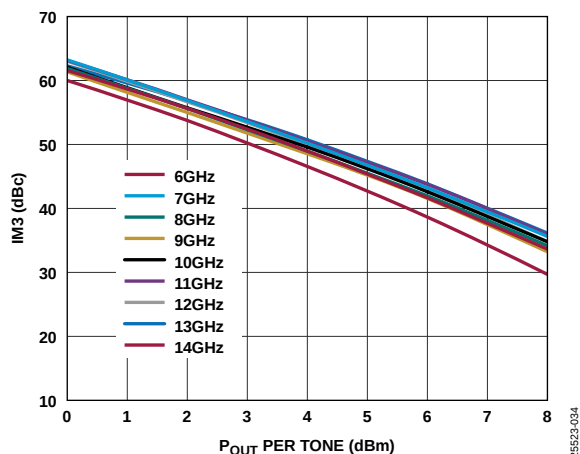


Figure 34. IM3 vs. P_{OUT} per Tone for Various Frequencies at $V_{CC} = 5$ V

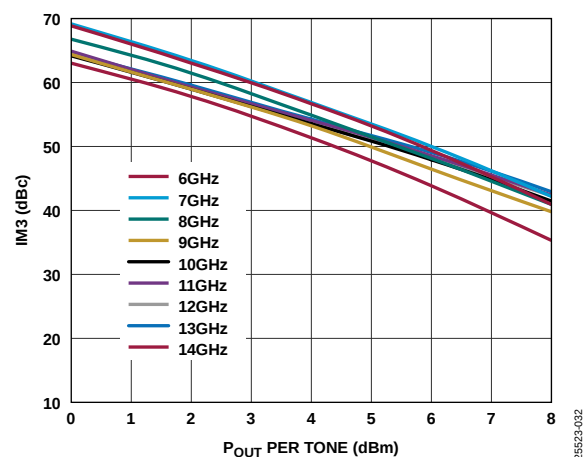


Figure 32. IM3 vs. P_{OUT} per Tone for Various Frequencies at $V_{CC} = 6$ V

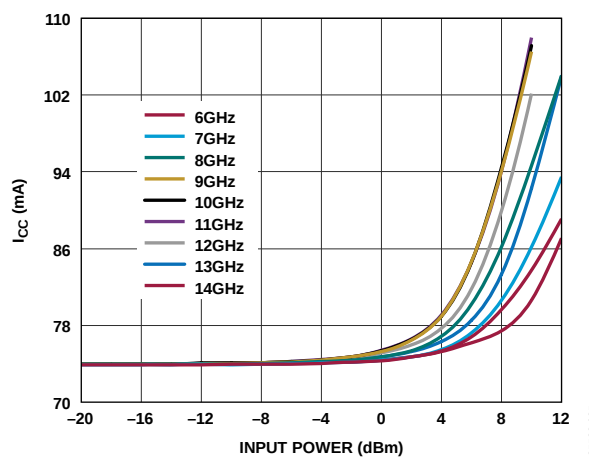


Figure 35. I_{CC} vs. Input Power for Various Frequencies at $V_{CC} = 5$ V

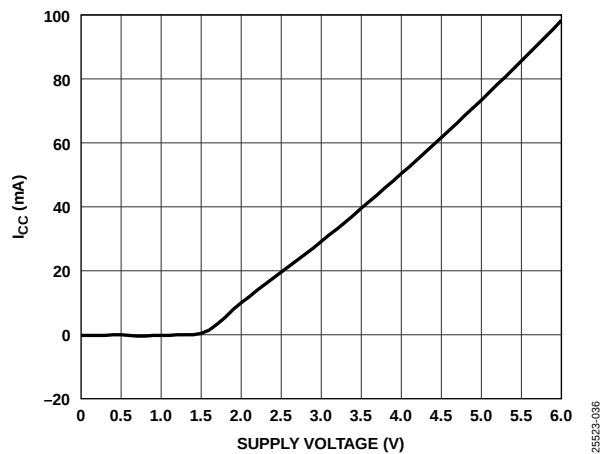


Figure 36. I_{CC} vs. Supply Voltage

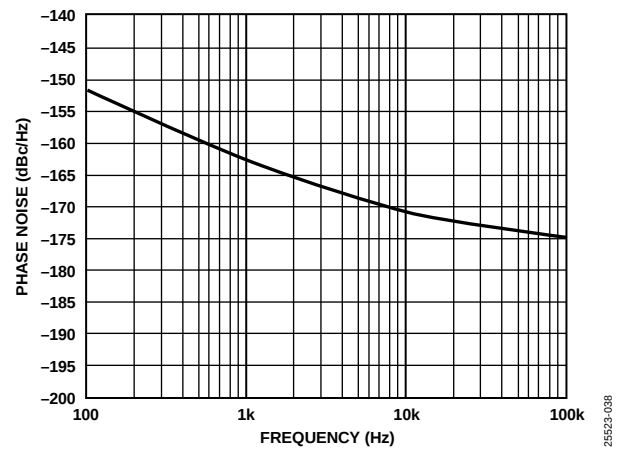


Figure 38. Phase Noise vs. Frequency at 10 GHz, P_{OUT} = P_{SAT}

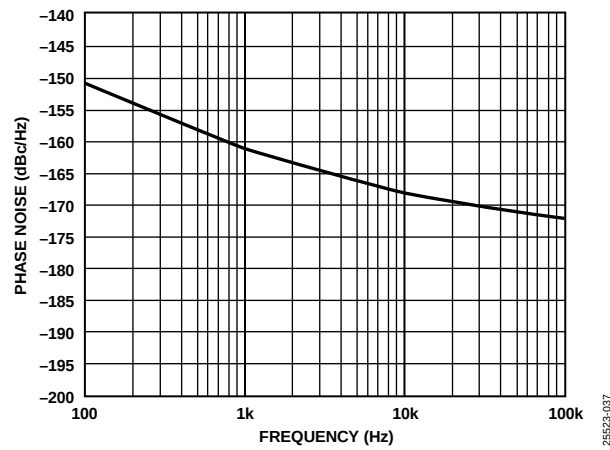


Figure 37. Phase Noise vs. Frequency at 10 GHz, P_{OUT} = 10 dBm

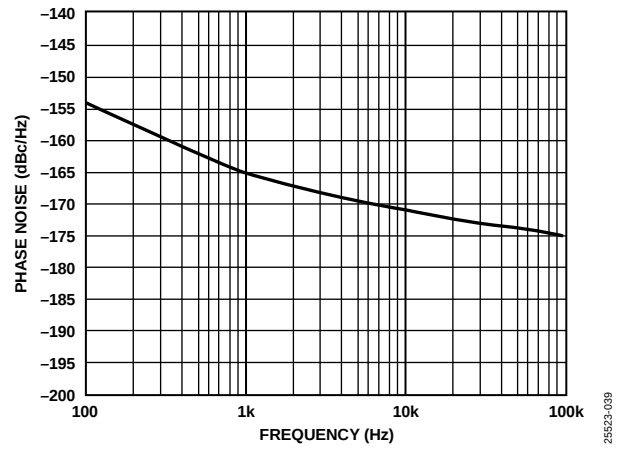


Figure 39. Phase Noise vs. Frequency at 10 GHz, P_{OUT} = P_{1dB}

THEORY OF OPERATION

The ADL8150 is a self biased, single 5 V power supply amplifier.

RF_{IN} is ac-coupled, and RF_{OUT}/V_{CC} requires an external bias tee.

Figure 40 shows the simplified block diagram.




Figure 40. Simplified Block Diagram

APPLICATIONS INFORMATION

BIASING PROCEDURES

The ADL8150 is a self biased GaAs, MMIC, HBT, low phase noise amplifier. Figure 41 shows the typical application circuit. The choice of L1 and C4 are critical to obtain the performance specified in this data sheet. L1 is a Coilcraft 0402DF-560XJR, 56 nH inductor. C4 is an American Technical Ceramics, 531Z104KTR16T, 0.1 μ F capacitor.

Power the ADL8150 from a well regulated, ultra low noise power source. The [LT3045EDD#PBF](#) ultra low noise, ultrahigh power supply ripple rejection (PSRR) linear regulator is recommended.

All of these components are included in the ADL8150 evaluation board circuit. For more details, see the [ADL8150-EVALZ](#) user guide.

Adhere to the following bias sequence during power-up:

1. Connect the V_{CC} pin to the power supply.
2. Set the V_{CC} pin to 5 V.
3. Apply the RF input signal.

Adhere to the following bias sequence during power-down:

1. Turn off the RF input signal.
2. Set the V_{CC} pin to 0 V.

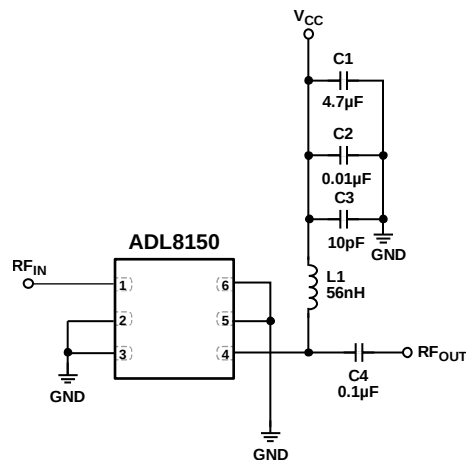


Figure 41. Typical Application Circuit

25523-041

OUTLINE DIMENSIONS

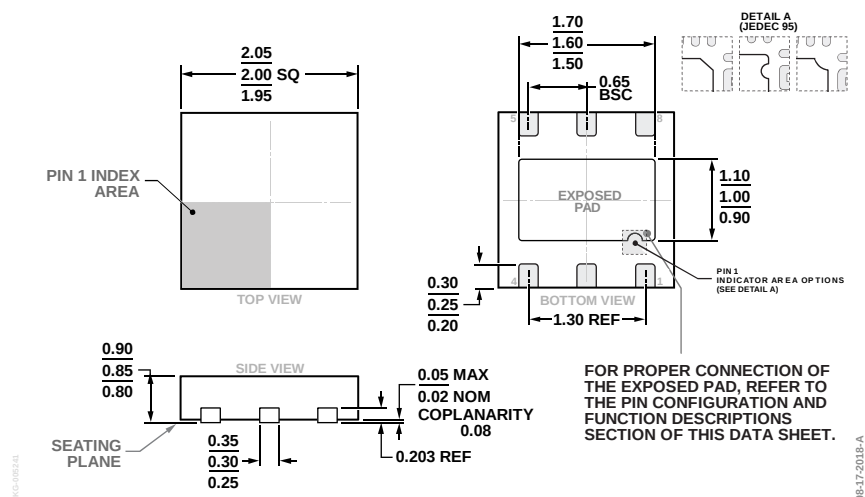


Figure 42. 6-Lead Lead Frame Chip Scale Package [LFCSP]
2 mm x 2 mm Body and 0.85 mm Package Height
(CP-6-12)
Dimensions shown in millimeters

ORDERING GUIDE

Model ^{1, 2}	Temperature Range	MSL Rating ³	Package Description ⁴	Package Option
ADL8150ACPZN	−40°C to +85°C	MSL3	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-12
ADL8150ACPZN-R7	−40°C to +85°C	MSL3	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-12
ADL8150-EVALZ			Evaluation Board	

¹ Z = RoHS Compliant Part.

² When ordering the evaluation board only, reference the model number, ADL8150-EVALZ.

³ See the Absolute Maximum Ratings section for additional information.

⁴ The lead finish of the ADL8150ACPZN and ADL8150ACPZN-R7 is nickel palladium gold (NiPdAu).